University of Nebraska - Lincoln DigitalCommons@University of Nebraska - Lincoln

Chemical and Biomolecular Engineering Funded Proposals

Chemical and Biomolecular Engineering
Departmental Papers

7-29-1997

Plasticized, antiplasticized and crystalline conducting polymers

Dr.Ravi Saraf
Department of Chemical Engineering, University of Nenraska-Lincoln, rsaraf@unl.edu

Follow this and additional works at: http://digitalcommons.unl.edu/chemeng_fundedproposals

Part of the Chemical Engineering Commons

Saraf, Dr.Ravi, "Plasticized, antiplasticized and crystalline conducting polymers" (1997). Chemical and Biomolecular Engineering Funded Proposals. Paper 3.

http://digitalcommons.unl.edu/chemeng_fundedproposals/3

This Article is brought to you for free and open access by the Chemical and Biomolecular Engineering Departmental Papers at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Chemical and Biomolecular Engineering Funded Proposals by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.



United States Patent [19]

Angelopoulos et al.

[11] Patent Number:

5,928,566

[45] **Date of Patent:**

Jul. 27, 1999

[54] PLASTICIZED, ANTIPLASTICIZED AND CRYSTALLINE CONDUCTING POLYMERS

[75] Inventors: Marie Angelopoulos, Cortlandt Manor;

Yun-Hsin Liao, Tarrytown; Ravi F. Saraf, Briarcliff Manor, all of N.Y.

[73] Assignee: International Business Machines

Corporation, Armonk, N.Y.

[21] Appl. No.: **08/620,619**

[22] Filed: Mar. 22, 1996

Related U.S. Application Data

[60]	Provisional	application No	. 60/007.688	, Nov. 29, 1995.
001	110 (1510)	application 140	, oo, oo i ,ooo	, 110 1. 22, 1222.

[51]	Int. Cl. ⁶	 H01B	1/12

- [52] **U.S. Cl.** **252/500**; 252/521.3; 524/262

[56] References Cited

U.S. PATENT DOCUMENTS

3,754,986	8/1973	Perez-Albuerne 117/201
4,846,982	7/1989	Madore et al 252/8.75
4,848,981	7/1989	Kasprzak et al 8/137
4,908,140	3/1990	Bausch et al
5,066,768	11/1991	Hiraoka et al 528/230
5,171,478	12/1992	Han 252/500
5,206,297	4/1993	Wernet et al 525/279
5,232,631	8/1993	Cao et al 252/500
5,233,000	8/1993	Yodice 526/258
5,276,112	1/1994	MacDiarmid et al 525/540
5,306,739	4/1994	Lucey 522/42
5,391,622	2/1995	Ho et al 525/171
5,403,913	4/1995	MacDiarmid et al 528/495
5,407,987	4/1995	Fukushima et al 524/367
5,417,715	5/1995	Ohwa et al
5,451,617	9/1995	Lai et al 523/107
5,514,772	5/1996	Suzuki et al 528/487
5,520,852	5/1996	Ikkala et al
5,523,021	6/1996	Epron et al
5,567,356	10/1996	Kinlen 252/500
5,595,689	1/1997	Kulkarni et al 252/500

FOREIGN PATENT DOCUMENTS

177793 4/1986 European Pat. Off. .
761202 3/1997 European Pat. Off. .
2648676 12/1990 France .
63-270738 11/1988 Japan .
92/22911 12/1992 WIPO .

OTHER PUBLICATIONS

Rudaya, L.I., et al., Zh. Prikl. Khim. (S.-Peterburg), 68 (1), 110-113. (Abstract Only), Month not known 1995.

MacDiarmid, A.G., et al., Synthetic Metals, 65, 103–116, Month not known 1994.

Kazama, Hideki, et al., Makromol. Chem., 189(5), 985–92. (Abstract Only), Month not known 1988.

Kirk-othmer, Encyclopedia of Chemical Technology, 3rd ed., vol. 18, John Wiley & Sons, pp. 111-115, Month not known 1982.

Handbook of Common Polymers, Roff, W.J., et al., editors, Butterworth & Co., pp. 515–517, Month not known 1971.

Dictionary of Chemical Names and Synonyms, Howard P.H., et al., editors, Lewis Publishers, p. I–219, Month not known 1992.

Primary Examiner—Mark Kopec Attorney, Agent, or Firm—Daniel P. Morris

[57] ABSTRACT

Materials containing precursors to electrically conductive polymers and electrically conductive polymers are described which have a high degree of crystallinity. The high degree of crystallinity is achieved by preparing the materials under conditions which provide a high degree of mobility to the polymer molecules permitting them to associate with one another to form a crystalline state. High levels of electrical conductivity are achieved in in the electrically conductive materials without stretch orienting the material. The enhanced electrical conductivity is isotropic as compared to a stretch oriented film which has isotropic electrical conductivity.

7 Claims, 8 Drawing Sheets

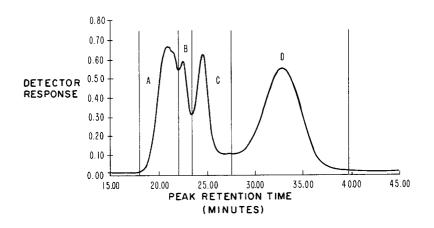
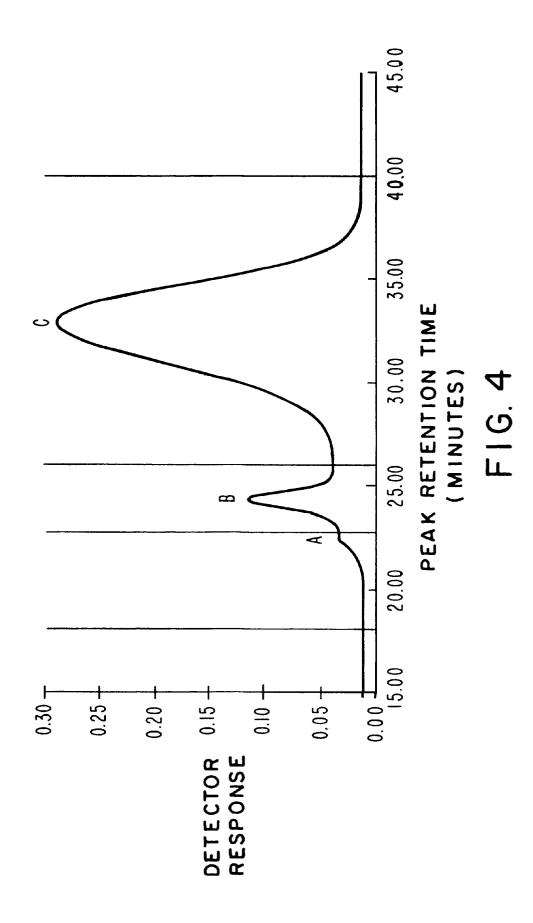


FIG.1

FIG.2

FIG.3



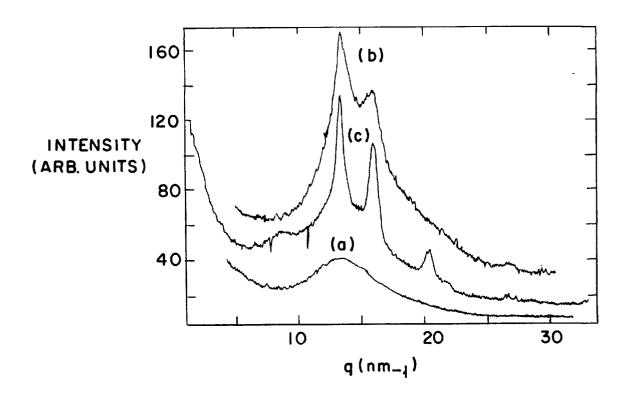


FIG. 5





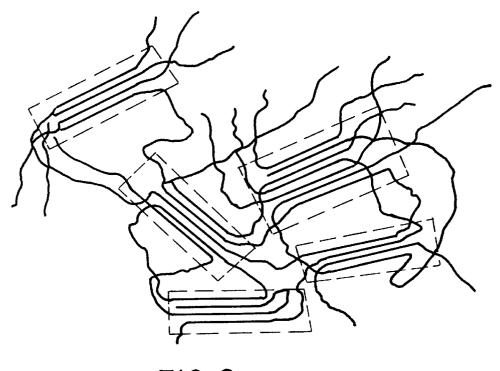



FIG. 6

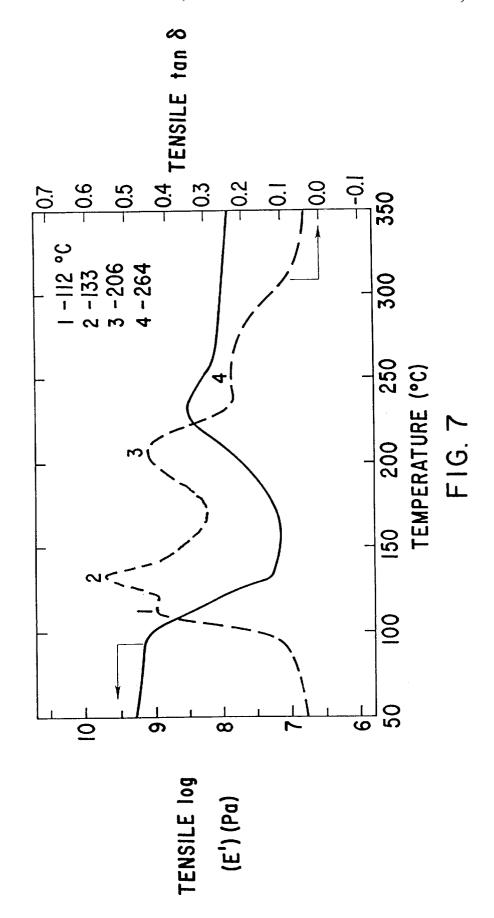

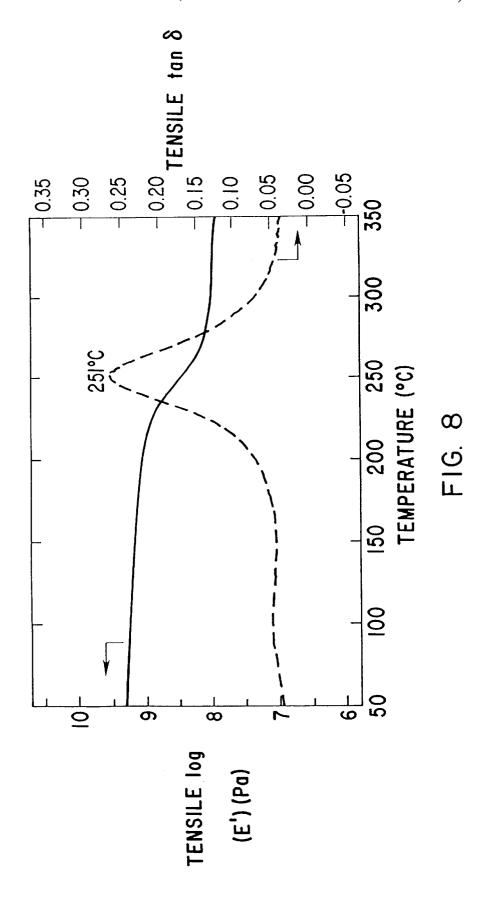

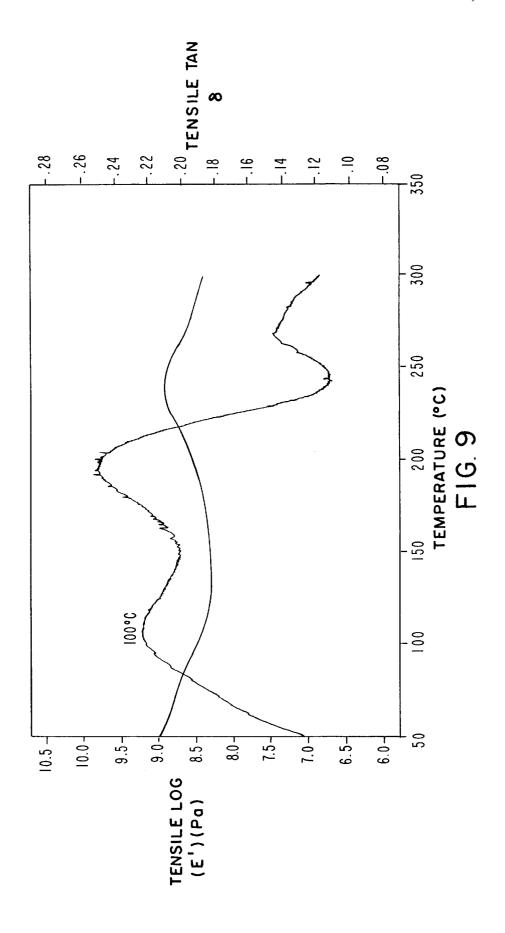

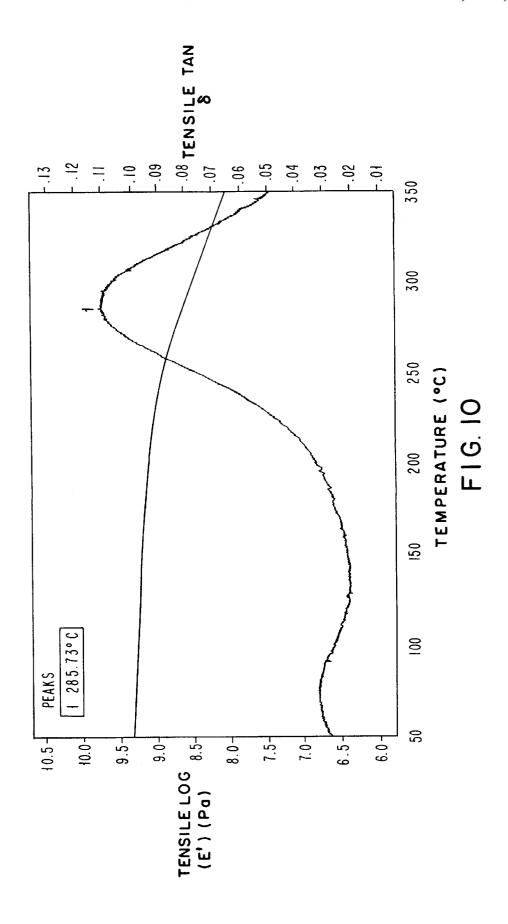

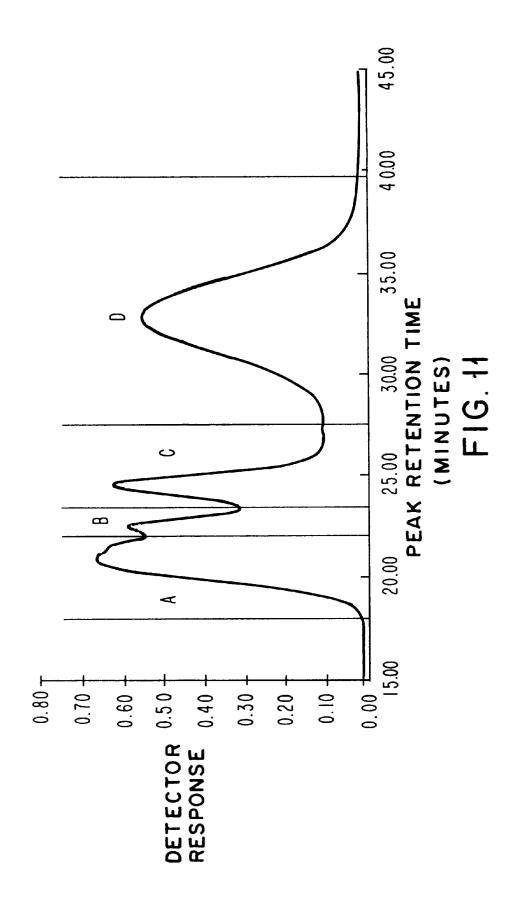

PLASTICIZED, ANTIPLASTICIZED AND CRYSTALLINE CONDUCTING POLYMERS

CROSS REFERENCE TO RELATED APPLICATION

U.S. patent application Ser. No. 08/630,631 entitled, "METHODS OF FABRICATING PLASTICIZED, ANTI-PLASTICIZED AND CRYSTALLINE CONDUCTING POLYMERS AND PRECURSORS THEREOF" and U.S. patent application Ser. No. 08/620,618 entitled, "POLY-CRYSTALLINE CONDUCTING POLYMERS AND PRE-CURSORS THEREOF HAVING ADJUSTABLE MOR-PHOLOGY AND PHYSICAL PROPERTIES" the teachings of which are incorporated herein by reference.

This application claims priority from Provisional Application Ser. No. 60/007,688 filed Nov. 29, 1995.

FIELD OF THE INVENTION

The present invention is directed to crystalline electrically 20 conductive polymer precursors and crystalline conducting polymers and applications thereof.

BACKGROUND

Electrically conductive organic polymers emerged in the 1970's as a new class of electronic materials. These materials have the potential of combining the electronic and magnetic properties of metals with the light weight, processing advantages, and physical and mechanical properties characteristic of conventional organic polymers. Examples of electrically conducting polymers are polyparaphenylene vinylenes, polyparaphenylenes, polyanilines, polythiophenes, polyazines, polyfuranes, polythianaphthenes polypyrroles, polyselenophenes, poly-p-phenylene sulfides, polyacetylenes formed from soluble precursors, combinations thereof and blends thereof with other polymers and copolymers of the monomers thereof.

These polymers are conjugated systems which are made electrically conducting by doping. The doping reaction can involve an oxidation, a reduction, a protonation, an alkylation, etc. The non-doped or non-conducting form of the polymer is referred to herein as the precursor to the electrically conducting polymer. The doped or conducting

Conducting polymers have potential for a large number of applications in such areas such as electrostatic charge/ discharge (ESC/ESD) protection, electromagnetic interference (EMI) shielding, resists, electroplating, corrosion protection of metals, and ultimately metal replacements, i.e. wiring, plastic microcircuits, conducting pastes for various interconnection technologies (solder alternative), etc. Many of the above applications especially those requiring high current capacity have not yet been realized because the 55 electrically conducting polymer precursor and electrically conductivity of the processible conducting polymers is not yet adequate for such applications.

To date, polyacetylene exhibits the highest conductivity of all the conducting polymers. The reason for this is that polyacetylene can be synthesized in a highly crystalline 60 form (crystallinity as high as 90% has been achieved) (as reported in Macromolecules, 25, 4106, 1992). This highly crystalline polyacetylene has a conductivity on the order of 10⁵ S/cm. Although this conductivity is comparable to that of copper, polyacetylene is not technologically applicable 65 because it is a non-soluble, non-processible, and environmentally unstable polymer.

The polyaniline class of conducting polymers has been shown to be probably the most suited of such materials for commercial applications. Great strides have been made in making the material quite processable. It is environmentally stable and allows chemical flexibility which in turn allows tailoring of its properties. Polyaniline coatings have been developed and commercialized for numerous applications. Devices and batteries have also been constructed with this material. However, the conductivity of this class of polymers is generally on the low end of the metallic regime. The conductivity is on the order of 10° S/cm. Some of the other soluble conducting polymers such as the polythiophenes, poly-para-phenylenevinylenes exhibit conductivity on the order of 10² S/cm. It is therefore desirable to increase the conductivity of the soluble/processible conducting polymers, in particular the polyaniline materials.

The conductivity (σ) is dependent on the number of carriers (n) set by the doping level, the charge on the carriers (q) and on the interchain and intrachain mobility (μ) of the carriers. σ=nqμ

Generally, n (the number of carriers) in these systems is maximized and thus, the conductivity is dependent on the mobility of the carriers. To achieve higher conductivity, the mobility in these systems needs to be increased. The mobility, in turn, depends on the morphology of the polymer. The intrachain mobility depends on the degree of conjugation along the chain, presence of defects, and on the chain conformation. The interchain mobility depends on the interchain interactions, the interchain distance, the degree of crystallinity, etc. Increasing the crystallinity results in increased conductivity as examplified by polyacetylene. To date, it has proven quite difficult to attain polyaniline in a highly crystalline state. Some crystallinity has been achieved by stretch orientation or mechanical deformation (A. G. MacDiarmid et al in Synth. Met. 55-57,753). In these 35 stretch-oriented systems, conductivity enhancements have been observed. The conductivity enhancement was generally that measured parallel to the stretch direction. Therefore, the conductivity in these systems is anisotropic. It is desirable to achieve a method of controlling and tuning 40 the morphology of polyaniline. It is desirable to achieve a method of controlling and tuning the degree of crystallinity and the degree of amorphous regions in polyaniline, which in turn provides a method of tuning the physical, mechanical, and electrical properties of polyaniline. It is form of the polymer is referred to herein as the conducting 45 further desirable to achieve highly crystalline and crystalline polyaniline and to achieve this in a simple and useful manner in order to increase the mobility of the carriers and, therefore, the conductivity of the polymer. It is also further desirable to achieve isotropic conductivity, that is conduc-50 tivity not dependent on direction as with stretch-oriented polyanilines.

OBJECTS

It is an object of the present invention to provide an conducting polymer having an adjustable morphology.

It is an object of the present invention to provide an electrically conductive polymer precursor and electrically conducting polymer in which the degree of amorphous and crystalline regions is adjustable.

It is an object of the present invention to provide an electrically conducting polymer precursor and electrically conducting polymer having adjustable physical, mechanical, and electrical properties.

It is an object of the present invention to provide a crystalline electrically conducting polymer precursor and crystalline conducting polymers.

It is an object of the present invention to provide a highly crystalline electrically conducting polymer precursor and highly crystalline conducting polymers.

It is another object of the present invention to provide an electrically conducting polymer that exhibits enhanced car- 5 rier mobility.

It is another object of the present invention to provide an electrically conducting polymer which exhibits enhanced conductivity.

It is another object of the present invention to provide an ¹⁰ polyaniline. electrically conducting polymer which exhibits enhanced isotropic conductivity. FIG. 3 is

It is another object of the present invention to provide a plasticization effect in electrically conducting polymer precursors and electrically conducting polymers.

It is another object of the present invention to provide an antiplasticization effect in electrically conducting polymer precursors and electrically conducting polymers.

It is another object of the present invention to provide a precursor or electrically conducting polymer containing an additive providing mobility.

It is another object of the present invention to provide a precursor or electrically conductive polymer containing an additive to induce an enhanced degree of crystallinity.

It is another object of the present invention to provide a non-strench oriented film of a precursor or of an electrically conductive polymer which has an enhanced degree of crystallinity.

It is an object of the present invention to provide an 30 regions electrically conducting polymer precursor and electrically conducting polymer having an increased glass transition temperature.

FIG. (DMTA)
Therma

It is an object of the present invention to provide an electrically conducting polymer precursor and electrically 35 conducting polymer having an decreased glass transition temperature.

It is an object of the present invention to provide an electrically conducting polymer precursor and electrically conducting polymer having enhanced mechanical properties.

It is an object of the present invention to provide an electrically conducting polymer precursor and electrically conducting polymer having decreased mechanical properties.

SUMMARY OF THE INVENTION

1. (SUMMARY) A broad aspect of the present invention is a structure having an admixture of an additive and a polymer selected from the group consisting of a precursor to an electrically conductive polymer and an electrically conductive polymer wherein the additive provides local mobility to the polymer to allow the polymer chains to closely associate with one another to achieve a highly crystalline state.

In a more particular aspect of the present invention is a structure having an admixture of an additive and a polymer selected from the group consisting of a precursor to an electrically conductive polymer and an electrically conductive polymer wherein the additive provides a plasticization effect.

In a more particular aspect of the present invention is a structure having an admixture of an additive and a polymer selected from the group consisting of a precursor to an electrically conductive polymer and an electrically conductive polymer and an electrically conductive polymer wherein the additive provides an antiplasticization effect.

4

BRIEF DESCRIPTION OF THE DRAWINGS

Further objects, features, and advantages of the present invention will become apparent from a consideration of the following detailed description of the invention when read in conjunction with the drawings FIG's. in which:

- FIG. 1 is a general formula for polyaniline in the non-doped or precursor form.
- FIG. 2 is a general formula for a doped conducting polyaniline.
- FIG. 3 is a general formula for the polysemiquinone radical cation form of doped conducting polyaniline.
- FIG. 4 is a Gel Permeation Chromatograph (GPC) of polyaniline base in NMP (0.1%). GPC shows a trimodal distribution-A very high molecular weight fraction (approx. 12%) and a major peak having lower molecular weight.

Curve 5(a) is a Wide Angle X-Ray Scattering (WAXS) spectrum for a polyaniline base film processed from NMP. The polymer film is essentially amorphous. Curve 5(b) is a Wide Angle X-Ray Scattering spectrum for a polyaniline base film that has been stretch-oriented (1/10=3.7). This film was derived from a gel. Curve 5(c) is a Wide Angle X-Ray Scattering spectrum for a polyaniline base film containing 10% of poly-co-dimethyl propylamine siloxane. This film is highly crystalline.

FIG. 6 is a Schematic diagram of a polycrystalline material as taught in present invention having crystalline regions (outlined in dotted rectangles) with intersticial amorphous regions

FIG. 7 is a Dynamic Mechanical Thermal Analysis (DMTA) plot for polyaniline base film cast from NMP. (First Thermal Scan; under Nitrogen).

FIG. 8 is a DMTA plot which represents the second thermal scan for a polyaniline base film cast from NMP; This same film was previously scanned as shown in FIG.7. Film Contains no residual solvent.

FIG. 9 is a DMTA plot for polyaniline base film cast from NMP and containing 5% poly-co-dimethyl aminopropyl siloxane (5% N content). First Thermal Scan.

FIG. 10 is a DMTA plot for polyaniline base film cast from NMP and containing 5% poly-co-dimethyl aminopropyl siloxane (5% N content). Second Thermal Scan (this same film was previously scanned as shown in FIG. 9) Film Contains no residual solvent.

FIG. 11 is a GPC for a polyaniline base solution in NMP containing 5% poly-co-dimethyl aminopropyl siloxane by weight to polyaniline. The polyaniline was 0.1% in NMP.

DETAILED DESCRIPTION

The present invention is directed toward electrically conducting polymer precursors and conducting polymers having adjustable morphology and in turn adjustable physical, mechanical, and electrical properties. The present invention is also directed toward controlling and enhancing the 3-dimensional order or crystallinity of conducting polymer precursors and of conducting polymers. In addition, the present invention is directed towards enhancing the electrical conductivity of conducting polymers. This is done by forming an admixture of an electrically conducting polymer precursor or an electrically conducting polymer with an additive whereby the additive provides local mobility to the molecules so as to allow the conducting polymer precursor or conducting polymer chains to associate with one another and achieve a highly crystalline state. An example of such an additive is a plasticizer. A plasticizer is a substance which

when added to a polymer, solvates the polymer and increases its flexibility, deformability, generally decreases the glass transition temperature Tg, and generally reduces the tensile modulus. In certain cases, the addition of a plasticizer may induce antiplasticization, that is an increase in the modulus or stiffness of the polymer, an increase in Tg. Herein the additives can provide a plasticization effect, an antiplasticization effect or both effects.

Examples of polymers which can be used to practice the present invention are of substituted and unsubstituted homopolymers and copolymers of aniline, thiophene, pyrrole, p-phenylene sulfide, azines, selenophenes, furans, thianaphthenes, phenylene vinylene, etc. and the substituted and unsubstituted polymers, polyparaphenylenes, polyparaphenylevevinylenes, polyanilines, polyazines, 15 polythiophenes, poly-p-phenylene sulfides, polyfuranes, polypyrroles, polythianaphthenes, polyselenophenes, polyacetylenes formed from soluble precursors and combinations thereof and copolymers of monomers thereof. The general formula for these polymers can be found in U.S. Pat. $_{20}$ No. 5,198,153 to Angelopoulos et al. While the present invention will be described with reference to a preferred embodiment, it is not limited thereto. It will be readily apparent to a person of skill in the art how to extend the teaching herein to other embodiments. One type of polymer 25 which is useful to practice the present invention is a substituted or unsubstituted polyaniline or copolymers of polyaniline having general formula shown in FIG. 1 wherein each R can be H or any organic or inorganic radical; each R can be the same or different; wherein each R¹ can be H or any organic or inorganic radical, each R¹ can be the same or different; $x \ge 1$; preferable $x \ge 2$ and y has a value from 0 to 1. Examples of organic radicals are alkyl or aryl radicals. Examples of inorganic radicals are Si and Ge. This list is exemplary only and not limiting. The most preferred embodiment is emeraldine base form of the polyaniline wherein y has a value of approximately 0.5. The base form is the non-doped form of the polymer. The non-doped form of polyaniline and the non-doped form of the other conductducting polymer precursor.

In FIG. 2, polyaniline is shown doped with a dopant. In this form, the polymer is in the conducting form. If the polyaniline base is exposed to cationic species QA, the polymer becomes substituted with the Q+cation to form an emeraldine salt as shown in FIG. 2. Q+can be selected from H+and organic or inorganic cations, for example, an alkyl group or a metal.

QA can be a protic acid where Q is hydrogen. When a 50 protic acid, HA, is used to dope the polyaniline, the nitrogen atoms of the imine part of the polyaniline are protonated. The emeraldine base form is greatly stabilized by resonance effects. The charges distribute through the nitrogen atoms and aromatic rings making the imine and amine nitrogens 55 indistinguishable. The actual structure of the doped form is a delocalized polysemiquinone radical cation as shown in FIG. **3**.

The emeraldine base form of polyaniline is soluble in various organic solvents and in various aqueous acid solutions. Examples or organic solvents are dimethylsulfoxide (DMSO), dimethylformamide (DMF) N-methylpyrrolidinone (NMP), dimethylene propylene urea, tetramethyl urea, etc. This list is exemplary only and not limiting. Examples of aqueous acid solutions is 80% acetic acid and 60-88% formic acid. This list is exemplary only and not limiting.

Polyaniline base is generally processed by dissolving the polymer in NMP. These solutions exhibit a bimodal or trimodal distribution in Gel Permeation Chromatography (GPC) as a result of aggregation induced by internal hydrogen bonding between chains as previously described in U.S. patent application Ser. no. 08/370,128, filed on Jan. 9, 1995, the teaching of which is incorporated herein by reference. The GPC curve for typical polyaniline base in NMP is shown in FIG. 4.

Polymers in general can be amorphous, crystalline, or partly crystalline. In the latter case, the polymer consists of crystalline phases and amorphous phases. The morphology of a polymer is very important in determining the polymer's physical, mechanical, and electronic properties.

Polyaniline base films processed from NMP either by spin-coating or by solution casting techniques are amorphous as can be seen in FIG. 5a which depicts the Wide Angle X-Ray Scattering (WAXS) spectrum for this material. Amorphous diffuse scattering is observed. Some crystallinity is induced in these films by post processing mechanical deformation especially if these films are derived from gels as described by A. G. MacDiarmid et al in Synth. Met. 55-57, 753 (1993). WAXS of a stretch oriented film having been stretched (1/lo=3.7X) derived from a gel is shown in FIG. 5b. Some crystallinity has been induced as compared to the non-stretch oriented films as evidenced by the defined scattering peaks.

Doping the amorphous polyaniline base films (those having structure shown in FIG. 5a) with aqueous hydrochloric acid results in isotropic conductivity of 1 S/cm. Such films are not crystalline. Similar doping of stretch oriented films results in anisotropic conductivity where conductivity on the order of 10² S/cm is measured parallel to the stretch direction whereas conductivity on the order of 10° S/cm is measured perpendicular to the stretch direction. It should also be noted that some level of crystallinity is lost during the doping process in these films.

According to the present invention, the interchain ing polymers is herein referred to as the electrically con- 40 (polymer chain) registration is increased as compared to a stretch oriented film.

FIGS. 7 and 8 show the dynamic mechanical thermal analysis (DMTA) spectrum for a polyaniline base film processed from NMP alone. FIG. 7 is the first scan where a nitrogen atoms of the imine (electron rich) part of the 45 Tg of approx. 118 is observed as a result of the residual NMP which is present in the film. FIG. 8 is the second thermal scan of the same film. This film has no residual solvent and a Tg of -251° C. is measured for the polyaniline base polymer.

> When an additive such as a plasticizer, such as a polyco-dimethyl propylamine siloxane, is added to the polyaniline base completely different properties and morphology is observed. The siloxane has a polar amine group which facilitates the miscibility of the polyaniline base and the plasticizer. The DMTA of a polyaniline base film cast from NMP and containing 5% by weight to polyaniline of the poly-co-dimethyl propyl amine siloxane exhibits a lower Tg on the first thermal scan as compared to polyaniline base processed from NMP alone (FIG. 9) as a result of plasticization induced by the siloxane. However, on the second thermal scan of this film (FIG. 10), the polymer exhibits an increase in Tg as compared to polyaniline processed from NMP. When the polysiloxane is added to a solution of polyaniline base, the siloxane due to the polar amine group 65 can interact with the polymer chains and disrupt some of the polyaniline interactions with itself or some of the aggregation. Thus, the polysiloxane first induces some deaggrega-

tion. However, the polysiloxane has multiple amine sites and thus, it can itself hydrogen bond with multiple polyaniline base chains and thus, the polysiloxane facilitates the formation of a cross-linked network. This cross-linked network accounts for the increased Tg observed in the DMTA. Tg is characteristic of the amorphous regions of a polymer and in this case the amorphous regions consist of a cross-linked polyaniline/polysiloxane network. Thus, the polysiloxane is inducing an antiplasticization effect in polyaniline base as the Tg is increased. Generally, plasticizers reduce Tg. GPC data (FIG. 11) is consistent with this model. The addition of the poly-amino containing siloxane to a polyaniline base solution in NMP results in a significant increase in the high molecular weight fractions depicting the cross-linked network which forms between polyaniline and the plasticizer.

In addition to the cross-linked network the siloxane induces in the amorphous regions, concomittantly it also is found to induce significant levels of crystallinity in polyaniline base as a result of the local mobility that it provides. FIG. 5c shows the WAXS for a polyaniline base film processed from NMP containing 10% of the poly amino containing siloxane. As can be seen highly crystalline polyaniline has been attained. Much higher levels of crystallinity as compared to FIG. 5b for the stretch oriented films.

Thus polyaniline by the addition of the siloxane forms a structure depicted in FIG. 6 where crystalline regions of 25 highly associated polyaniline chains (outlined by a rectangle) are formed with intersticial amorphous regions. In most cases, the additive resides in the amorphous intersticial sites. The degree of crystallinity (number of crystalline sites) and the size of the crystalline domains as wril as the degree of amorphous regions and the nature of the amorphous region (aggregated, i.e. cross-linked or not) can be tuned by the type and amount of additive. In turn, by controlling the above, the properties of the material can also be controlled.

With the poly-co-dimethyl aminopropyl siloxane (5% N content), loadings ranging from 0.001 to 20% by weight gives highly crystalline polyaniline. The highly crystalline polyaniline in turn exhibits increased modulus, stiffness, yield and tensile strengths, hardness, density and softening points. Thus, the siloxane at these loadings is having an 40 antiplasticization effect. Above 20% loading, the crystallinity begins to decrease. As the crystallinity decreases, the modulus, stiffness, yield and tensile strengths, hardness, density and softening points begin to decrease. Thus, the siloxane at these loadings begins to have a plasticization 45 effect. The siloxane content becomes high enough that it disrupts the polyaniline base interactions in the crystalline regions. With the poly-co-dimethyl aminopropyl siloxanes having 0.5 and 13% N ratios, similar trends are observed but the particular amount of siloxane needed to have a plasticization effect or an antiplasticization effect varies. Thus, the degree of crystallinity and the degree of amorphous regions and in turn the properties of polyaniline can be tuned by the nature of the additive as well as the amount of additive. Indeed, using the same additive but simply changing the 55 acid. loading dramatically changes the morphology and in turn the properties of polyaniline.

The electronic properties of the polymer are also impacted. The conductivity of a polyaniline base film cast from NMP and containing 1% by weight poly-co-dimethyl aminopropyl siloxane which is doped by aqueous hydrochloric acid is 50 S/cm as compared to 1 S/cm for a polyaniline film with no plasticizer. This is isotropic conductivity. The doped film containing the polysiloxane retains the highly crystalline structure.

The degree of crystallinity and the degree of amorphous regions and in turn the physical, mechanical, and electronic properties can be tuned by the particular additive used and by the amount of additive. For example, the Tg of polyaniline can be increased or decreased by the amount and type of additive. The mechanical properties such as tensile properties, modulus, impact resistance, etc. can be tuned as described above. The additive can range from 0.001 to 90% by weight, more preferably from 0.001 to 50% and most preferably from 0.001 to 25%. A list of plasticizers that can be used to practice the present invention is given in Table 1. The plasticizer can be small molecules, oligomeric or polymeric in nature as can be seen in Table 1. They can be monofuntional, bifunctional, and multifunctional. The additive can also be removed from the final film structure if so desired by appropriate extraction. Specific Examples

Polyaniline Synthesis Polyaniline is synthesized by the oxidative polymerization of aniline using ammonium peroxydisulfate in aqueous hydrochloric acid. The polyaniline hydrochloride precipitates from solution. The polymer is then neutralized using aquoeous ammonium hydroxide. The neutralized or non-dope polyaniline base is then filtered, washed and dried. Polyaniline can also be made by electrochemical oxidative polymerization as taught by W. Huang, B. Humphrey, and A. G. MacDiarmid, J. Chem. Soc., Faraday Trans. 1, 82, 2385, 1986.

Polyaniline Base in NMP: The polyaniline base powder is readily dissolved in NMP up to 5% solids. Thin films (on the order of a micron) can be formed by spin-coating. Thick films are made by solution casting and drying (70° C. in vacuum oven under a nitrogen purge for 15 hours). These solutions and films have the properties described above. Polyaniline Base in NMP/Plasticizer

- a. Polyaniline Base was first dissolved in NMP to 5% solids and allowed to mix well. A poly-co-dimethyl, aminopropyl siloxane (N content 5% relative to repeat unit) was dissolved to 5% in NMP. The siloxane solution was added to the polyaniline base solution. The resulting admixture was allowed to mix for 12 hours at room temperature. A number of solutions were made having from 0.001% to 50% siloxane content (by weight relative to polyaniline). Thin films were spin-coated onto quartz substrates; Thick films were prepared by solution casting and baking the solutions at 70° C. in a vacuum oven under a Nitrogen purge for 15 hours). The solutions and the films have the properties described above.
 - b. The same experiment described in(a)was carried out except that the plasticizer was a poly-co-dimethyl, aminopropyl siloxane in which the N content was 13%.
 - c. The same experiment described in (a) was carried out except that the plasticizer was a poly-co-dimethyl, aminopropyl siloxane in which the N content was 0.5%.
 - d. The same experiment described in (a) was carried out except that the plasticizer was polyglycol diacid.
 - e. The same experiment described in (a) was carried out except that the plasticizer was 3,6,9-trioxaundecanedioic acid.
 - f. The same experiment described in (a) was carried out except that the plasticizer was poly(ethylene glycol) tetrahydro furfuryl ether.
- g. The same experiment described in (a) was carried out 60 except that the plasticizer was glycerol triacetate.
 - h. The same experiment described on (a) was carried out except the plasticizer was epoxidized soy bean oil. Polyaniline Base in NMP/en-Cresol/Plasticizer

The same experiment as described in (a) was carried out except that polyaniline base and the plasticizer was dissolved in NMP/m-Cresol mixtures in which m-Cresol ranged from 1 to 99%

Polyaniline Base in m-Cresol/Plasticizer

The same experiment as described in (a) was carried out except that the polyaniline ba e as e was dissolved in m-Cresol and the plasticizer was dissolved in m-Cresol.

9

Polyaniline Base in m-Cresol and in NMP/m-Cresol

Polyaniline Base was dissolved in m-Cresol and in NMP/ m-Cresol combinations to 5% solids. The m-Cresol in the latter system being the additive ranged from 1 to 99%. Free-Standing films were made by solution casting techniques. With increasing m-cresol content, the polyaniline exhibited a WAXS similar to that shown in FIG. 5a except that the amorphous scattering peak became somewhat sharper indicative of some crystallinity. However, this was significantly less than observed with the siloxane plasticizer. Doped Polyanilines

1. Hydrochloric Acid and/or Methanesulfonic Acid Doped Films

Polyaniline base films made as described above were doped by aqueous acid solutions of hydrochloric or methanesulfonic acid. The films were immersed in the acid solution for 12 hours for thin films and 36 hours for the thick films. The conductivity of a polyaniline base film processed from NMP and doped with these acid solutions is 1 S/cm. The conductivity of a base film processed from NMP and 1% poly-co-dimethyl, aminopropyl siloxane (5%N content) was 50 S/cm.

2. Sulfonic Acid Doped Polyanilines

Polyaniline Base was dissolved in a solvent such as NMP or NMP/m-Cresol combinations, etc. from 1 to 5% solids. To this solution was added a dopant such as camphorsulfonic acid or acrylamidopropanesulfonic acid (previously reported in U.S. Patent Application Ser. No. 595,853 filed on Feb. 2, 1996). These solutions were used to spin-coat or solution cast films. In some experiments, the plasticizer such as the poly-co-dimethyl, aminopropyl siloxane in a solvent was added to the doped polyaniline solution. In certain other 40 experiments, the plasticizer was first added to the pani base solution. The dopant was then added to the polyaniline solution containing the plasticizer.

The teaching of the following U.S. Patent Applications are incorporated herein by reference:

"CROSS-LINKED ELECTRICALLY CONDUCTIVE POLYMERS, PRECURSORS THEREOF AND APPLICA-TIONS THEREOF", application Ser. No. 595,853, filed Feb. 2, 1996;

"METHODS OF FABRICATION OF CROSS-LINKED ELECTRICALLY CONDUCTIVE POLYMERS AND PRECURSORS THEREOF", Application Ser. No. 594,680, filed Feb. 2, 1996;

"DEAGGREGATED ELECTRICALLY CONDUCTIVE 55 POLYMERS AND PRECURSORS THEREOF", application Ser. No. 370,127, filed Jan. 9, 1995; and "METHODS OF FABRICATION OD DEAGGREGATED ELECTRI-CALLY CONDUCTIVE POLYMERS AND PRECUR-SORS THEREOF", application Ser. No. 370,128, filed Jan.

While the present invention has been shown and described with respect to a preferred embodiment, it will be understood that numerous changes, modifications, and improvements will occur to those skilled in the art without departing from the spirit and scope of the invention.

10

PLASTICIZERS

ADIPIC ACID DERIVATIVES

Dicapryl adipate Di-(2-ethylhexyl) adipate Di(n-heptyl, n-nonyl) adipate Diisobutyl adipate 10 Diisodecyl adipate Dinomyl adipate Di-(tridecyl) adipate AZELAIĆ ACID DERIVATIVES

Di-(2-ethylheyl azelate) Diisodecyl azelate Diisoctyl azelate Dimethyl azelate Di-n-hexyl azelate BENZOIC ACID DERIVATIVES

Diethylene glycol dibenzoate Dipropylene glycol dibenzoate Polyethylene glycol 200 dibenzoate CITRIC ACID DERIVATIVES

Acetyl tri-n-butyl citrate Acetyl triethyl citrate Tri-n-butyl citrate Triethyl citrate DIMER ACID DERIVATIVES

Bis-(2-hydroxyethyl dimerate) EPOXY DERIVATIVES

Epoxidized linseed oil Epoxidized soy bean oil 2-Ethylhexyl epoxytallate n-Octyl expoxystereate FUMARIC ACID DERIVATIVES

Dibutyl fumarate GLYCEROL DERIVATIVES

Glycerol triacetate ISOBUTYRATE DERIVATIVE

2,2,4-Trimethyl-1,3-pentanediol Diisobutyrate ISOPHTHALIC ACID DERIVATIVES

Di-(2-ethylhexyl) isophthalate Dimethyl isophthalate Diphenyl isophthalate LAURIC ACID DERIVATIVES

Methyl laurate LINOLEIC ACID DERIVATIVE

Methyl linoleate, 75% MALEIC ACID DERIVATIVES

Di-(2-ethylhexyl) maleate Di-n-butyl maleate MELLITATES

Tricapryl trimellitate Tri-(2-ethylhexyl) trimellitate Triisodecvl trimellitate Tri-(n-octvl.n-decvl) trimellitate MYRISTIC ACID DERIVATIVES

Isopropyl myristate OLEIC ACID DERIVATIVES

Butvl oleate Glycerol monooleate Glycerol trioleate

TABLE I

TABLE I-continued

IZERS PLASTICIZERS

PLASTICIZERS

Methyl oleate n-Propyl oleate Tetrahydrofurfuryl oleate

PALMITIC ACID DERIVATIVES

Isopropyl palmitate Methyl palmitate PARAFFIN DERIVATIVES

Chloroparaffin, 41% Cl Chloroparaffin, 50% Cl Chloroparaffin, 60% Cl Chloroparaffin, 70% Cl

PHOSPHORIC ACID DERIVATIVES

2-Ethylhexyl diphenyl phosphate Isodecyl diphenyl phosphate 4-Butylphenyl diphenyl phosphate Tri-butoxyethyl phosphate Tributyl phosphate Tricresyl phosphate Triphenyl phosphate

PHTHALIC ACID DERIVATIVES

Butyl octyl phthalate
Dicapryl phthalate
Dicapryl phthalate
Dicyclohexyl phthalate
Dietyl phthalate
Diethyl phthalate
Dibexyl phthalate
Dibexyl phthalate
Disobutyl phthalate
Disodecyl phthalate
Disoonyl phthalate
Disooctyl phthalate
Dimethyl phthalate
Diridecyl phthalate
Ditridecyl phthalate
Ditridecyl phthalate
Diundecyl phthalate

Butyl benzyl phthalate

RICINOLEIC ACID DERIVATIVES

Butyl ricinoleate Glyceryl tri(acetyl) ricinoleate) Methyl acetyl ricinoleate Methyl ricinoleate n-Butyl acetyl ricinoleate Propylene glycol ricinoleate SEBACIC ACID DERIVATIVES

Dibutyl sebacate Di-(2-ethylhexyl) sebacate Dimethyl sebacate STEARIC ACID DERIVATIVES

Ethylene glycol monostearate Glycerol monostearate Isopropyl isostearate Methyl stearate n-Butyl stearate Propylene glycol monostearate SUCCINIC ACID DERIVATIVES

Diethyl succinate SULFONIC ACID DERIVATIVES

N-Ethyl o,p-toluenesulfonamide o,p-toluenesulfonanamide Polyesters

adipic acid polyester Paraplex G-40 adipic acid polyester Santicizer 334F azelaic acid polyester Plastolein 9720) azelaic acid polyester Plastolein 9750 sebacic acid polyester Paraplex G-25 Sucrose derivatives

sucrose acetate-isobutyrate (SAIB) Tartaric acid derivative

TABLE I-continued

10 dibutyl tartrate Terephthalic acid derivative

> bis(2-ethylhexyl) terephthalate (DOTP) Trimellitic acid derivatives

15 tris(2-ethylhexyl) trimellitate (TOTM) heptyl nonyl trimellitate heptyl nonyl undecyl trimellitate triisodecyl trimellitate Glycol derivatives

diethylene glycol dipelargonate triethylene glycol di-2 ethylbutyrate poly(ethylene glycol) (200) di-2ethylhexanoate Glycolates

25 methyl phthalyl ethyl glycolate butyl phthalyl butyl glycolate Hydrocarbons

hydrogenated terphenyls HB-40 poly(alkyl naphthalene)s Panaflex 60 aliphatic aromatics Leromoll chlorinated paraffin (52 wt % Cl), Cerector S-52 Terpenes and Derivatives

Camphor

Hydrogenated methyl ester or rosin Phosphonic Acid Derivatives

Chlorinated Polyphosphanate Siloxanes

40 Polydimethyl siloxane
Polyco-dimethyl/propylamine siloxanes with various amount of
propylamine content
Polydiphenylsiloxanes

Polyco-dimethylphenyl siloxanes Silanol terminated polysiloxanes Amino terminated polysiloxanes

45 Epoxy terminated polysiloxanes Carbirol terminated polysiloxanes Polysilanes

Glycols

Polyethylene glycol

Poly(ethylene glycol) tetrahydrofurfuryl ether Poly(ethylene glycol) bis(carboxymethyl) ether

3.6.9-trioxadecanoic acid 3.6.9-trioxaundecanedioic acid

Polyglycol diacid

What is claimed is:

1. A composition consisting essentially of a polyaniline material having at least one crystal grain and an amorphous material containing an additive in an amount from about 0.001% to about 90% by weight;

said additive is poly-co-dimethylaminopropyl siloxane.

- 2. A structure according to claim 1, wherein said composition is electrically conductive and and is isotropically electroconductive.
- 3. A composition according to claim 1, wherein said 5 structure is stretch oriented.
- **4**. A composition according to claim **3**, wherein said at least one crystal grain is greater than about 80 Å.

14

- 5. A composition according to claim 1, wherein said structure is thermally annealed.
- 6. A composition according to claim 1, further including m-cresol.
- 7. A according to claim 1, wherein said composition has at least one metallic island having size greater than about 200 $\mathring{\Delta}$

* * * * *