

March 1995

Reaction Fronts in a Porous Medium. Approximation Techniques versus Numerical Solution

Fernando Escobedo

Hendrik J. Viljoen

Department of Chemical Engineering, University of Nebraska-Lincoln, hviljoen1@unlnotes.unl.edu

Follow this and additional works at: <http://digitalcommons.unl.edu/chemengreaction>



Part of the [Chemical Engineering Commons](#)

Escobedo, Fernando and Viljoen, Hendrik J., "Reaction Fronts in a Porous Medium. Approximation Techniques versus Numerical Solution" (1995). *Papers in Reaction Kinetics*. 9.

<http://digitalcommons.unl.edu/chemengreaction/9>

This Article is brought to you for free and open access by the Chemical and Biomolecular Engineering Research and Publications at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Papers in Reaction Kinetics by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

The flame sheet approximation (FS) and a novel polynomial approximation technique (PA) are compared in terms of their capability to describe reaction fronts of highly exothermic reactions in a porous medium. A one-phase model and a two-phase model of a system with adiabatic walls and a radiant output (to approximate the case of a porous radiant burner) are included in the analysis. By matching the reaction zone solution found by either the FS or PA method with the solutions of the non reacting zones, the temperature, conversion, and position of the reaction zone were determined. Numerical solutions for catalytic and non catalytic oxidation reactions were used to compare the predictions of both approaches. It was found that although both techniques yielded good approximations to the solutions, the PA technique proved to be more accurate, producing results with 3.5% of the numerical results. Both methods can find useful application in the analysis of this class of problems.

$$T_f = T_{f0} + \frac{1}{\gamma} T_{f1} + \dots \quad (1)$$

$$\gamma = \frac{E}{RT_{f0}} \quad (2)$$

$$v = x\gamma \quad (3)$$

$$\Theta \left(x_i, y_i, \frac{dy_i}{dx}, \dots, \frac{d^{n-1}y_i}{dx^{n-1}}, \frac{d^n y_i}{dx^n} \right) = 0, \quad (k + 1 \text{ equations}) \quad (4)$$

$$S \left(\Delta x_j, y_j, \frac{dy_j}{dx}, \dots, \frac{d^n y_j}{dx^n} \right) = 0, \quad (k - 1 \text{ equations}) \quad (7)$$

$$x_{i+1} = x_i + \Delta x_i, \quad (k \text{ equations}) \quad (8)$$

$$L_t = x_k - x_0, \quad (1 \text{ equation}) \quad (9)$$

$$g_0 \left(x_0, y_0, \frac{dy_0}{dx}, \dots, \frac{d^{n-1}y_0}{dx^{n-1}} \right) = 0, \quad n_1 \text{ (} n_1 \text{ equations, } n_1 < n \text{)} \quad (5)$$

$$g_k \left(x_k, y_k, \frac{dy_k}{dx}, \dots, \frac{d^{n-1}y_k}{dx^{n-1}} \right) = 0, \quad (n - n_1 \text{ equations}) \quad (6)$$

$$f_i(x, y, C_1, C_2, \dots, C_n) = 0 \quad (10)$$

$$(r_1 + 1) + (r_3 + 1) + (s - 1)(r_2 + 1) = sn + m + 1 \quad (11)$$

$$m = n + s \quad (12)$$

$$\frac{d^p y_{i+1}}{dx^p} = \sum_{j=p}^m \frac{j!}{(j-p)!} c_j \Delta x_i^{j-p}, \quad p = 0, 1, \dots, n \Rightarrow n+1 \quad (13)$$

$$c_j = \frac{1}{j!} \frac{d^j y_i}{dx^j}, \quad j = 0, 1, \dots, n \Rightarrow n+1 \quad (14)$$

$$y_{i+1} = y_i + \frac{\Delta x_i}{2} \left(\frac{dy_i}{dx} + \frac{dy_{i+1}}{dx} \right) \quad (15)$$

$$y_{i+1} = y_i + \frac{\Delta x_i}{3} \left(2 \frac{dy_i}{dx} + \frac{dy_{i+1}}{dx} \right) + \frac{\Delta x_i^2}{6} \frac{d^2 y_i}{dx^2} \quad (16)$$

$$\frac{dy_{i+1}}{dx} = \frac{dy_i}{dx} + \frac{\Delta x_i}{2} \left(\frac{d^2 y_i}{dx^2} + \frac{d^2 y_{i+1}}{dx^2} \right) \quad (17)$$

$$y_{i+q} = y_i + q \frac{\Delta x_{j+i}}{6(1+r)} \left[(3+2r) \frac{dy_{i+q}}{dx} + (1+r)(3+r) \frac{dy_i}{dx} - r^2 \frac{dy_{i-q}}{dx} \right] \quad (18)$$

where

$$r = \left(\frac{\Delta x_{i+1}}{\Delta x_i} \right)^q, \quad q = \pm 1, \quad j = \frac{1}{2}(q-1) \quad (19)$$

The two additional equations for the fourth order polynomial PA(2,2) are

$$\frac{dy_{i+q}}{dx} = \frac{dy_i}{dx} + q \frac{\Delta x_{j+i}}{6(1+r)} \left[(3+2r) \frac{d^2 y_{i+q}}{dx^2} + (1+r)(3+r) \frac{d^2 y_i}{dx^2} - r^2 \frac{d^2 y_{i-q}}{dx^2} \right] \quad (20)$$

$$y_{i+q} = y_i + q \frac{\Delta x_{j+i}}{2} \left(\frac{dy_i}{dx} + \frac{dy_{i+q}}{dx} \right) + \frac{\Delta x_{j+i}^2}{12} \left(\frac{d^2 y_i}{dx^2} - \frac{d^2 y_{i+q}}{dx^2} \right) \quad (21)$$

$$\frac{d}{dx} \left[(k_e + bT^3) \frac{dT}{dx} \right] - GC_p \frac{dT}{dx} + (-\Delta H)R = 0 \quad (22)$$

$$\frac{dw}{dx} = -\frac{R}{G} \quad (23)$$

$$R = k_* \frac{w}{T} e^{-E/RT} \quad (24)$$

$$k_* = \frac{\epsilon k_0 \Pi}{R} \quad (25)$$

$$(k_e + bT^3) \frac{dT}{dx} = GC_p (T - T_{in}) \quad (26)$$

$$w = w_{in} \quad (27)$$

$$(k_e + bT^3) \frac{dT}{dx} = h_r (T_w^4 - T^4) \quad (28)$$

$$-cx = b \left[z^2(T_j - T) - \frac{z}{2}(T_j^2 - T^2) + \frac{1}{3}(T_j^3 - T^3) \right] + (k_e - bz^3) \ln \left(\frac{z + T_j}{z + T} \right) \quad (29)$$

where $c = GC_p$ (30)

$$T_j = T_1, \quad z = -T_{in} \quad (31)$$

$$\frac{dT_1}{dx} = \frac{c}{k_e + bT_1^3} (T_1 - T_{in}) \quad (32)$$

For zone II $T_j = T_k, \quad z = \frac{k_e + bT_k^3}{c} \frac{dT_k}{dx} - T_k$ (33)

$$\frac{dT_k}{dx} = \frac{c}{k_e + bT_k^3} \left[T_k - T_{k+1} - \frac{h_r}{c} (T_{k+1}^4 - T_w^4) \right] \quad (34)$$

$$T_{fl} = \gamma(T_1 - T_{f0}) \quad \text{and} \quad \frac{dT_{fl}}{dv} = \frac{dT_1}{dx} \quad (35)$$

when $v \rightarrow +\infty, (T = T_k, w = w_{out})$

$$T_{fl} = (T_k - T_{f0}) \quad \text{and} \quad \frac{dT_{fl}}{dv} = \frac{dT_k}{dx} \quad (36)$$

$$\frac{dT_1}{dx} - \frac{dT_k}{dx} = \beta_{in} - \beta_{out} \quad (37)$$

$$\frac{d^2 T_{fl}}{dv^2} = -a \left(\frac{dT_{fl}}{dv} - \frac{dT_k}{dx} + \beta_{out} \right) e^{T_{fl}/T_m} \quad (38)$$

$$\beta_{in,out} = \frac{(-\Delta H)}{k_e + bT_m^3} Gw_{in,out} \quad (39)$$

$$a = \frac{\epsilon k_0 \Pi e^{-E/RT_m}}{GE} \quad (40)$$

$$\frac{dT_{\Pi}}{dv} - \frac{dT_1}{dx} + \left(\frac{dT_k}{dx} - \beta_{out}\right) \ln\left(\frac{\frac{dT_{\Pi}}{dv} - \frac{dT_k}{dx} + \beta_{out}}{\beta_{in}}\right) = -aT_m(e^{T_{\Pi}/T_m} - e^{\gamma(T_1 - T_m)/T_m}) \quad (41)$$

By taking the limit $v \rightarrow +\infty$ in eq 41, we get

$$\frac{dT_k}{dx} - \frac{dT_1}{dx} + \left(\frac{dT_1}{dx} - \beta_{in}\right) \ln\left(\frac{w_{out}}{w_{in}}\right) = -aT_m \times (e^{\gamma(T_k - T_m)/T_m} - e^{\gamma(T_1 - T_m)/T_m}) \quad (42)$$

At $v = 0$, $T = T_m$ and $dT_{\Pi}/dv = 0$; eq 41 yields

$$-\frac{dT_1}{dx} + \left(\frac{dT_1}{dx} - \beta_{in}\right) \ln\left(1 - \frac{dT_1/dx}{\beta_{in}}\right) = -aT_m(1 - e^{\gamma(T_1 - T_m)/T_m}) \quad (43)$$

$$G^2 = \frac{\epsilon k_0 \Pi}{E} [T_m(k_e + bT_m^3)e^{-E/RT_m}(1 - e^{-E(T_m - T_0)/RT_m^2})] \left[C_p(T_m - T_{in}) + [w_{in}(-\Delta H) - C_p(T_m - T_{in})] \times \ln\left[1 - \frac{C_p(T_m - T_{in})}{w_{in}(-\Delta H)}\right] \right] \quad (44)$$

$$\frac{d^2T_i}{dx^2} = \frac{1}{k_{ei}} \left[-3b\left(T_i \frac{dT_i}{dx}\right)^2 + c \frac{dT_i}{dx} - (-\Delta H) \frac{k_* w_i}{T_i} e^{-E/RT_i} \right] \quad (45)$$

$$w_i = w_{in} - \frac{1}{G(-\Delta H)} \left[c(T_i - T_{in}) - k_{ei} \frac{dT_i}{dx} \right] \quad (46)$$

$$\frac{d^2T_i}{dx^2} = \Theta\left(T_i, \frac{dT_i}{dx}\right), \quad i = 1, 2, \dots, k \quad (47)$$

$$\frac{dw_i}{dx} = v_1 \frac{dw_2}{dx} \quad \text{and} \quad \frac{dw_k}{dx} = v_k \frac{dw_2}{dx} \quad (48)$$

$$k_e \frac{d^2 T_s}{dx^2} = h_s(T_s - T_g) - \Psi(-\Delta H)R_s \quad (49)$$

$$-GC_p \frac{dT_g}{dx} + h_s(T_s - T_g) + (1 - \Psi)(-\Delta H)R_g = 0 \quad (50)$$

$$\frac{dw}{dx} = -\Psi \frac{R_s}{G} - (1 - \Psi) \frac{R_g}{G} \quad (51)$$

$$R_s = k_s \frac{w}{T_s} e^{-E/RT_s} \quad \text{and} \quad R_g = k_g \frac{w}{T_g} e^{-E/RT_g} \quad (52)$$

$$k_e \frac{dT_s}{dx} = h_0(T_s - T_{in}) \quad (53)$$

$$T_g = T_{in} + \frac{h_0}{GC_p}(T_s - T_{in}) \quad (54)$$

$$w = w_{in} \quad (55)$$

$$k_e \frac{dT_s}{dx} = h_r(T_w^4 - T^4) + h_c(T_g - T_s) \quad (56)$$

$$T_g = C + Ae^{Mx} + Be^{Nx} \quad (57)$$

$$T_s = C + Af_m e^{Mx} + Bf_n e^{Nx} \quad (58)$$

$$M, N = \frac{h_s}{2c} \left[-1 \pm \left(1 + \frac{4c^2}{k_e h_s} \right)^{1/2} \right], \quad M > N \quad (59)$$

$$f_m = 1 + \frac{cM}{h_s}, \quad f_n = 1 + \frac{cN}{h_s} \quad (60)$$

$$C = T_{in} \quad (61)$$

$$A = \frac{T_{g1} - T_{in}}{e^{-ML_1} - e^{-NL_1}} (\Gamma - e^{-NL_1}) \quad (62)$$

$$B = \frac{T_{g1} - T_{in}}{e^{-ML_1} - e^{-NL_1}} (-\Gamma + e^{-ML_1}) \quad (63)$$

$$\Gamma = \frac{(N - M) \frac{h_0}{h_s}}{\left(1 - \frac{h_0}{c} - \frac{h_0}{h_s} M\right) e^{NL_1} - \left(1 - \frac{h_0}{c} - \frac{h_0}{h_s} N\right) e^{ML_1}} \quad (64)$$

$$T_{s1} = T_{in} + f_m A + f_n B \quad (65)$$

$$\frac{dT_{g1}}{dx} = \frac{h_s}{c} (T_{s1} - T_{g1}) \quad (66)$$

$$\frac{dT_{s1}}{dx} = \frac{c}{k_e} (T_{g1} - T_{in}) \quad (67)$$

$$T_g = T_{in} + (T_{g1} - T_{in}) e^{Mx} \quad (68)$$

$$T_s = T_{in} + (T_{g1} - T_{in}) f_m e^{Mx} \quad (69)$$

$$T_{s1} = T_{in} + f_m (T_{g1} - T_{in}) \quad (70)$$

$$C = T_{gk} - \frac{k_e}{c} \frac{dT_{sk}}{dx} \quad (71)$$

$$A = \frac{c \frac{dT_{gk}}{dx} - k_e N \frac{dT_{sk}}{dx}}{c(M - N)}; \quad B = \frac{-c \frac{dT_{gk}}{dx} + k_e M \frac{dT_{sk}}{dx}}{c(M - N)} \quad (72)$$

$$\frac{dT_{gk}}{dx} = \frac{h_s}{c} (T_{sk} - T_{gk}) \quad (73)$$

$$k_e \frac{dT_{s(k+1)}}{dx} = h_c (T_{g(k+1)} - T_{s(k+1)}) - h_r (T_{s(k+1)}^4 - T_w^4) \quad (74)$$

$$T_{g(k+1)} = C + Ae^{ML_2} + Be^{NL_2} \quad (75)$$

$$T_{s(k+1)} = C + Af_m e^{ML_2} + Bf_n e^{NL_2} \quad (76)$$

$$\frac{dT_{s(k+1)}}{dx} = AMf_m e^{ML_2} + BNf_n e^{NL_2} \quad (77)$$

$$T_g = T_{gf0} + \frac{1}{\gamma} T_{gf1} + \dots \quad (78)$$

$$T_s = T_{sf0} + \frac{1}{\nu} T_{sf1} + \dots \quad (79)$$

$$w = w_{f0} + \frac{1}{\gamma} w_{f1} + \dots \quad (80)$$

$$\frac{d^2 T_{sf0}}{dv^2} = 0, \rightarrow \frac{dT_{sf0}}{dv} = \text{constant} \quad (81)$$

$$k_e \frac{d^2 T_{sf1}}{dv^2} = -\Psi(-\Delta H) \frac{k_*' w_{f0}}{T_{sf0}} e^{-E/RT_s} \quad (82)$$

$$c \frac{dT_{gf0}}{dv} = (1 - \Psi)(-\Delta H) \frac{k_*' w_{f0}}{T_{gf0}} e^{-E/RT_s} \quad (83)$$

$$\frac{dw_{f0}}{dv} = -\frac{k_*' w_{f0}}{G} \left[\frac{\Psi}{T_{sf0}} e^{-E/RT_s} + \frac{1 - \Psi}{T_{gf0}} e^{-E/RT_g} \right] \quad (84)$$

$$k_*' = k_* / \gamma \quad (85)$$

$$dT_{sf1}/dv = \text{constant} \quad (86)$$

$$w_{f0} = w_{in} - \frac{C_p}{(-\Delta H)} (T_{gf0} - T_{g1}) \quad (87)$$

$$\frac{dT_g}{dx} = \frac{k_*}{GT_g} \left[\frac{(-\Delta H)w_{in}}{C_p} + T_{g1} - T_g \right] e^{-E/RT_g} \quad (88)$$

$$h_s(T_{s1} - T_{g1}) = \frac{k_*(-\Delta H)w_{in}}{T_{g1}} e^{-E/RT_{g1}} \quad (89)$$

$$T_{gm} = T_{g1} + (-\Delta H)w_{in}/C_p \quad (90)$$

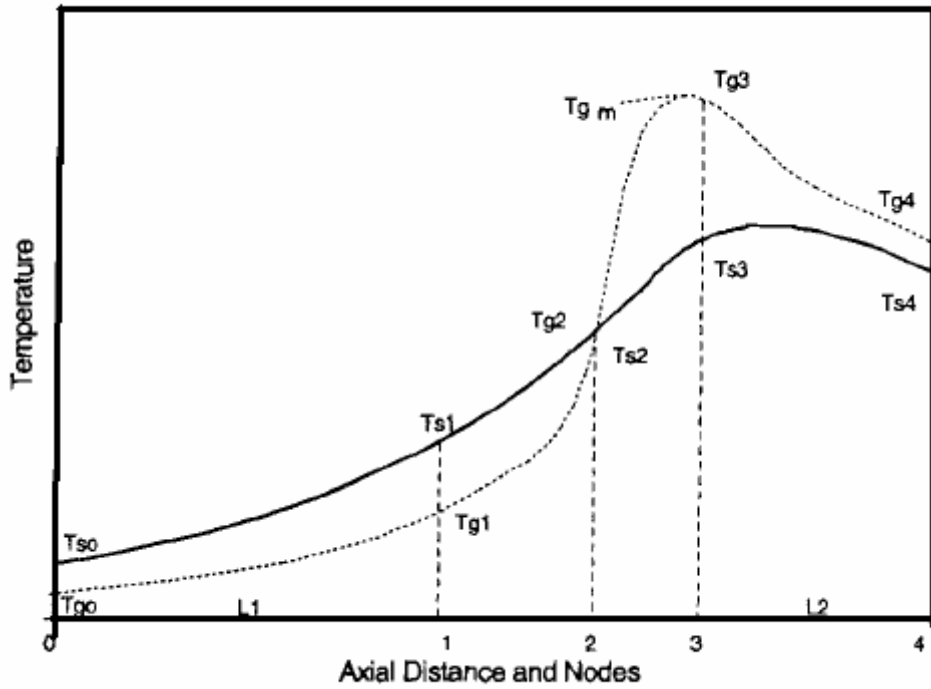


Figure 1. Integration steps for the two-phase model (burner).

$$\frac{dT_{s1}}{dx} - \frac{dT_{sk}}{dx} = \beta_{in} - \beta_{out} \quad (91)$$

$$\frac{dT_{sk}}{dx} - \frac{dT_{s1}}{dx} + \left(\frac{dT_{s1}}{dx} - \beta_{in} \right) \ln \left(\frac{w_{out}}{w_{in}} \right) = -\alpha T_m (e^{\gamma(T_{s(k+1)} - T_m)/T_m} - e^{\gamma(T_{s0} - T_m)/T_m}) \quad (92)$$

$$G^2 = \frac{\epsilon k_0 \Pi}{E} [T_m k_e e^{-E/RT_m} (1 - e^{-E(T_m - T_{s0})/RT_m^2})] / \left[C_p (T_{g1} - T_{in}) + [w_{in} (-\Delta H) - C_p (T_{g1} - T_{in})] \ln \left[1 - \frac{C_p (T_{g1} - T_m)}{w_{in} (-\Delta H)} \right] \right] \quad (93)$$

$$\frac{d^2 T_{si}}{dx^2} = \frac{h_s}{k_e} (T_{si} - T_{gi}) - \Psi \frac{(-\Delta H) k_* w_i}{k_e T_{si}} e^{-E/RT_{si}} \quad (94)$$

$$\frac{dT_{gi}}{dx} = \frac{1}{c} \left[h_s (T_{si} - T_{gi}) + (1 - \Psi) \frac{(-\Delta H) k_* w_i}{k_e T_{gi}} e^{-E/RT_{gi}} \right] \quad (95)$$

$$w_i = w_{in} + \frac{1}{G(-\Delta H)} \left[c(T_{in} - T_{gi}) + k_e \frac{dT_{si}}{dx} \right] \quad (96)$$

$$\frac{d^2 T_{si}}{dx^2} = \Theta_s \left(T_{si}, \frac{dT_{si}}{dx}, T_{gi} \right) \quad (97)$$

$$\frac{dT_{gi}}{dx} = \Theta_g \left(T_{si}, \frac{dT_{si}}{dx}, T_{gi} \right) \quad (98)$$

$$|h_s(T_{si} - T_{gi})| = \zeta |(-\Delta H)G \frac{dw_i}{dx}|, \quad \zeta > 0 \quad (99)$$

$$T_{gk} = T_{in} + \frac{(-\Delta H)w_{in}}{C_p} + \frac{k_e}{c} \frac{dT_{sk}}{dx} \quad (100)$$

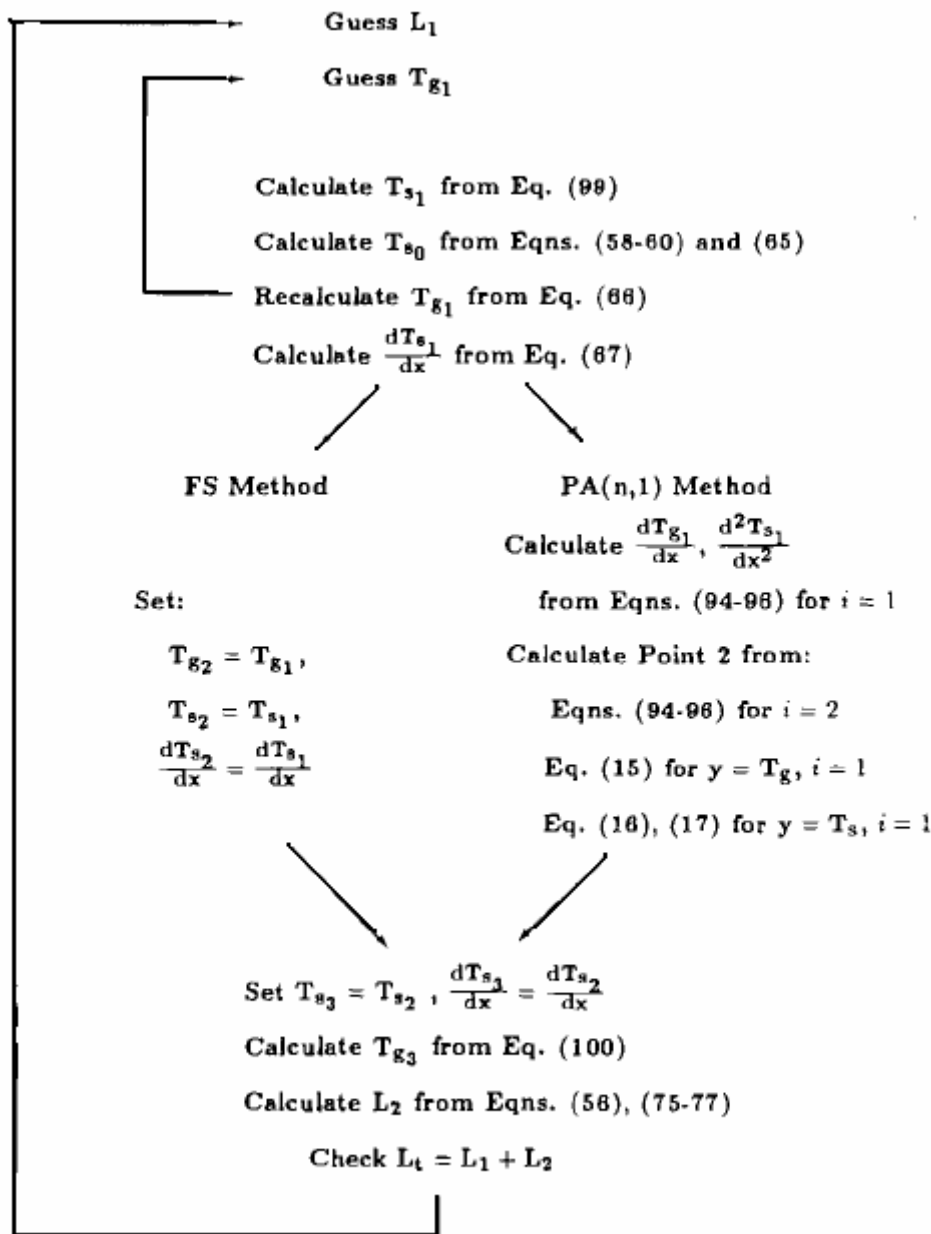


Figure 2. Calculation scheme to solve the PRB model.

Reaction Fronts in a Porous Medium. Approximation Techniques versus Numerical Solution
 Fernando Escobedo and Hendrik J. Viljoen *Industrial & Engineering Chemistry Research*,
 34(3); 794-805. © 1995, American Chemical Society.

Table 1. Parameter Values

parameter	units	CO oxidation		CH ₄ combustion	
		1-phase	2-phase	1-phase	2-phase
b	W/(m·K ⁴)	1.0×10^{-9}		8.7×10^{-10}	
C_p	J/(mol·K)	30	30	40	45
E/R	K	11524	11524	15000	15000
G	mol/(s·m ²)	5.0	5.0	10.0	10.0
h_0	W/(m ² ·K)		10		10
h_c	W/(m ² ·K)		10		10
h_r	W/(m ² ·K ⁴)			5.7×10^{-8}	5.7×10^{-8}
h_s	W/(m ³ ·K)		20000		200000
k_0	s ⁻¹	1.12×10^{10}	1.12×10^{10}	1.8×10^8	1.8×10^8
k_c	W/(m·K)	4.0	4.0	1.5	2.5
L_t	m	0.10	0.10	0.04	0.04
T_{in}	K	427	427	300	300
w_{in}		0.03	0.03	0.08	0.08
$-\Delta H$	J/mol	2.8×10^5	2.8×10^5	8.0×10^5	8.0×10^5
ϵ		0.4	0.4	0.9	0.9
Π	atm	1.0	1.0	1.0	1.0

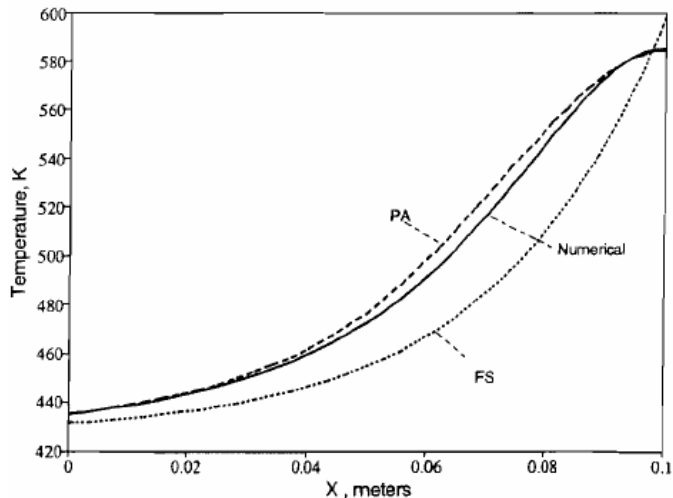


Figure 3. Comparison of temperature profiles. CO oxidation one-phase model.

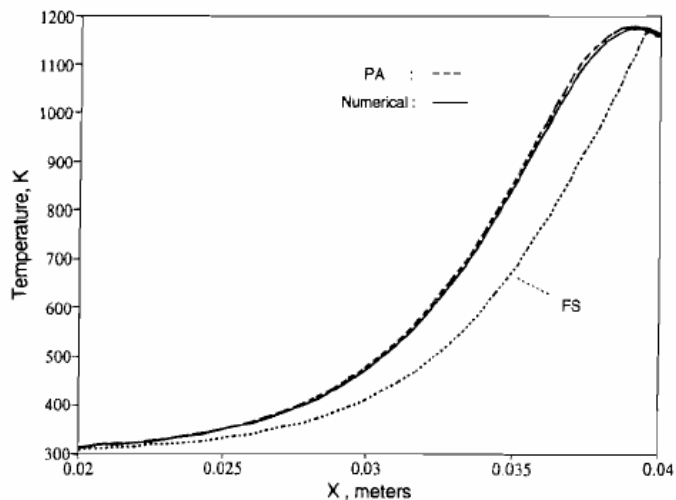


Figure 4. Comparison of temperature profiles. CH₄ oxidation, one-phase model.

Table 2. Comparison of Results for CO Oxidation^a

model	G	variable at outlet	numer results	FS		PA	
				values	% error	values	% error
1-phase	2	temp	503.5	513.4	12.9%	500.9	-3.4%
		conv	27.3%	30.9%	13.0%	26.4%	-3.3%
	5	temp	585.3	598.1	8.1%	584.7	-0.4%
		conv	56.5%	61.1%	8.1%	56.3%	-0.4%
10	temp	662.7	675.7	5.5%	664.0	0.6%	
	conv	84.2%	88.8%	5.5%	84.6%	0.6%	
2-phase	2	temp solid	503.0	510.7	10.1%	503.1	0.1%
		temp gas	502.8	507.2	5.8%	502.8	0.0%
	conv	27.1%	28.9%	6.6%	27.1%	-0.0%	
	5	temp solid	573.1	578.1	3.4%	574.6	1.0%
		temp gas	566.1	549.9	-11.6%	565.6	-0.4%
	10	conv	49.8%	44.6%	-10.6%	49.7%	-0.3%
		temp solid	613.1	611.6	-0.8%	615.8	1.5%
	temp gas	570.7	537.4	-23.2%	573.6	2.0%	
conv	51.8%	40.3%	-22.2%	52.8%	2.0%		

^a The relative deviation for temperature values is found from % error = 100(T_{calc} - T_{numer})/(T_{numer} - T_{in}).

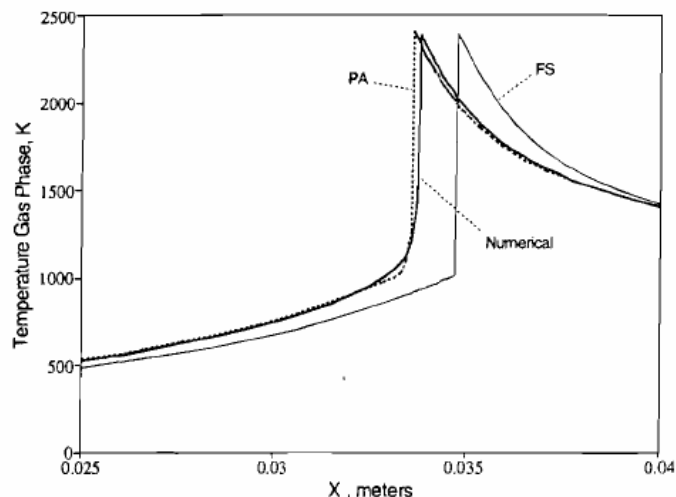


Figure 5. Comparison of temperature profiles. CH₄ oxidation, two-phase model.

Table 3. Comparison of Results for CH₄ Combustion^a

model	param	item	numer results	FS		PA	
				values	% error	values	% error
1-phase	G = 2	T _{max}	920.81	921.2	0.1%	922.3	0.2%
		L ₁	0.0336	0.0394	17.3%	0.0334	-0.6%
		conv	60.2%	60.8%	1.0%	60.2%	0.1%
	G = 10	T _{max}	1172.1	1168.7	-0.4%	1177.9	0.7%
		L ₁	0.0391	0.0395	1.0%	0.0391	0.0%
		conv	69.3%	68.9%	-0.5%	69.9%	0.9%
2-phase and h _s = 200 000	G = 20	T _{max}	1324.8	1317.3	-0.7%	1336.6	1.2%
		L ₁	0.0396	0.0397	0.3%	0.0395	-0.3%
		conv	76.5%	75.7%	-1.0%	77.6%	1.5%
	G = 5	T _{g(k+1)}	1456.0	1502.6	4.0%	1464.4	0.7%
		T _{s(k+1)}	1031.8	991.1	-5.6%	1024.8	-1.0%
		L ₁	0.0388	0.0389	0.2%	0.0388	-0.2%
G = 10	T _{g(k+1)}	1401.5	1414.9	1.2%	1400.0	-0.1%	
	T _{s(k+1)}	1265.4	1252.7	-1.3%	1266.6	0.1%	
	L ₁	0.0339	0.0384	2.6%	0.0336	-0.7%	
2-phase and G = 10	G = 12	T _{g(k+1)}	1423.7	1424.0	0.0%	1423.6	-0.0%
		T _{s(k+1)}	1300.2	1299.3	-0.1%	1300.1	-0.0%
		L ₁	0.0233	0.0278	19.3%	0.0233	0.0%
	h _s = 120 000	T _{g(k+1)}	1406.6	1407.3	0.1%	1406.6	0.0%
		T _{s(k+1)}	1260.6	1260.0	-0.1%	1260.6	0.0%
		L ₁	0.0173	0.0230	33.1%	0.0181	4.5%
h _s = 400 000	T _{g(k+1)}	1450.4	1485.2	3.0%	1447.5	-0.3%	
	T _{s(k+1)}	1217.2	1179.1	-4.2%	1220.2	0.3%	
	L ₁	0.0382	0.0384	0.6%	0.0381	-0.3%	

^a The relative deviation for temperature values is found from % error = 100(T_{calc} - T_{numer})/(T_{numer} - T_{in}).

Reaction Fronts in a Porous Medium. Approximation Techniques versus Numerical Solution
Fernando Escobedo and Hendrik J. Viljoen Industrial & Engineering Chemistry Research.
34(3); 794-805. © 1995, American Chemical Society.

$$RE = \frac{\text{heat released by radiation at output}}{\text{heat released by complete combustion}} \times 100 \quad (101)$$

Reaction Fronts in a Porous Medium. Approximation Techniques versus Numerical Solution
Fernando Escobedo and Hendrik J. Viljoen Industrial & Engineering Chemistry Research.
34(3); 794-805. © 1995, American Chemical Society.

Nomenclature

A = constant, eqs 62 and 72a
 a = constant, eq 40
 B = constant, eqs 63 and 72b
 $b = 4\phi\sigma_B d_p$, $W/(m \cdot K^4)$
 C = constant, eqs 61 and 71
 $c = GC_p$, $W/(K \cdot m^2)$
 C_p = specific heat of gas phase, $J/(mol \cdot K)$
 d_p = particle size in bed, m
 E = activation energy, J/mol
 f_m/f_n = parameters, eq 60
 G = molar flux, $mol/(s \cdot m^2)$
 h = heat transfer coefficient, $W/(m^2 \cdot K)$
 h_r = radiation heat transfer coefficient, $W/(m^2 \cdot K^4)$
 h_s = interphase heat transfer coefficient, $W/(m^3 \cdot K)$
 $(-\Delta H)$ = heat of reaction, J/mol
 k_e = thermal conductivity, $W/(m \cdot K)$
 k_0 = frequency factor, s^{-1}
 $k^*, k^{*'} =$ parameters, eqs 25 and 85
 L_1 = length of reactor, m
 L_1, L_2 = distances from flame to either bed end, m
 M, N = roots of characteristic equation, eq 59
 m, n = order of polynomial and differential equation
 R = universal gas constant, $J/(mol \cdot K)$
 R = reaction rate, $mol/(s \cdot m^3)$
 RE = radiant efficiency, eq 101
 T = temperature, K
 v = expanded axial distance, m
 w = reactant molar fraction
 x = axial distance, m
 Δx = step size, m
 z = parameter, eqs 31b and 34

Greek Symbols

β = parameter, eq 39
 $\gamma = E/RT_0$
 Γ = parameter, eq 64
 ϵ = bed porosity
 ϕ = radiation transfer factor
 Π = absolute inlet pressure, atm
 σ_B = Stefan-Boltzmann constant, $W/(m^2 \cdot K^4)$
 Ψ = parameter to distinguish between cases
 ζ = constant, eq 99

Subscripts

0 = Beginning of bed
1 = Beginning of reaction zone
c = convective
f = inner expansion
g = gas phase
in = inlet
k = end of reaction zone
 $k + 1$ = downstream end of bed
m = maximum value
out = outlet
s = Solid phase