University of Nebraska - Lincoln DigitalCommons@University of Nebraska - Lincoln

Publications of the US Geological Survey

US Geological Survey

1-1-1962

Floods in Nebraska on Small Drainage Areas Magnitude and Frequency


Emil W. Beckman

Norman E. Hutchison

Follow this and additional works at: http://digitalcommons.unl.edu/usgspubs

Beckman, Emil W. and Hutchison, Norman E., "Floods in Nebraska on Small Drainage Areas Magnitude and Frequency" (1962). *Publications of the US Geological Survey.* Paper 96. http://digitalcommons.unl.edu/usgspubs/96

This Article is brought to you for free and open access by the US Geological Survey at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Publications of the US Geological Survey by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

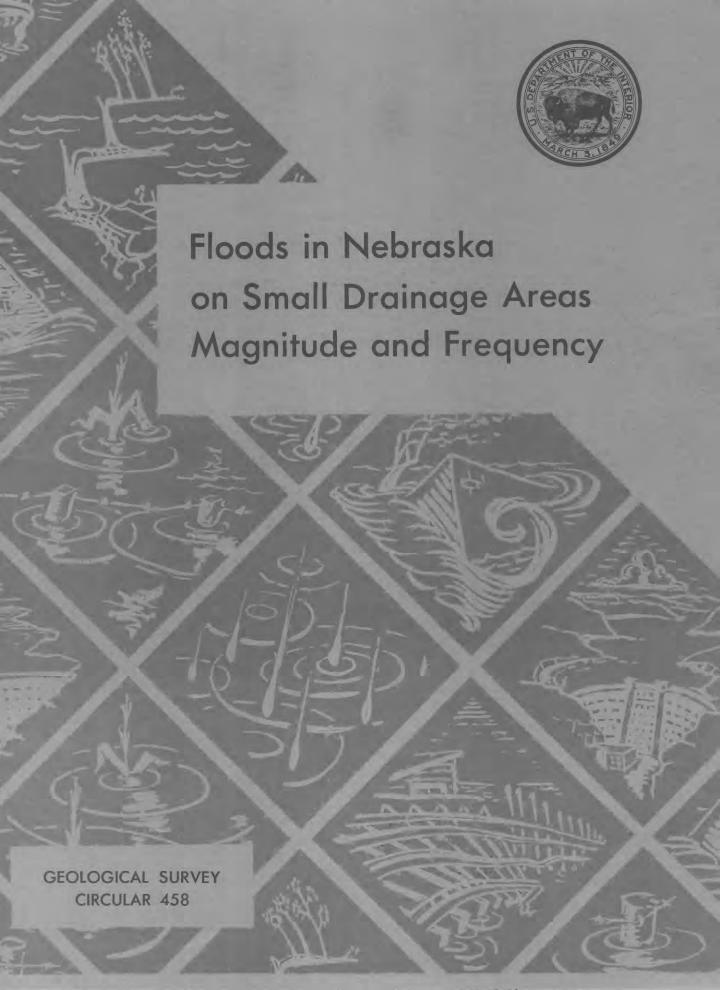

Floods in Nebraska on Small Drainage Areas, Magnitude and Frequency

By Emil W. Beckman and Norman E. Hutchison

Prepared in cooperation with the Nebraska Department of Roads



GEOLOGICAL SURVEY CIRCULAR 458

United States Department of the Interior STEWART L. UDALL, SECRETARY



Geological Survey
THOMAS B. NOLAN, DIRECTOR



CONTENTS

P	age		Page
Abstract Introduction Description of area Physiography Soil Climate Drainage areas Causes of floods Flood records available Flood-frequency analysis Flood frequency at a gaging station Value Types of series Plotting position Historical data Fitting frequency curves Limitations of a single-station analysis	1 1 1 1 1 2 3 3 3 9 9 9 9 9 10 10 10	Flood-frequency analysis—Cont. Regional flood-frequency analysis Base period Definition of mean annual flood Homogeneity of records Composite frequency curves Relations of mean annual flood Hydrologic areas Application of regional flood-frequency data Tributary areas of natural runoff Stage of flood discharge Maximum known floods Summary Selected references	11 11 12 12 12 14 16 16 16 17 32 32
I	LLUSTRA	ATIONS	
-			
2. Map of Nebraska showing loc analysis	ation of g	lebraskaaging stations used in flood-frequency	
5. Composite frequency curves6. Variation of mean annual floor	of annual od with co	ncy regions and hydrologic areas floods, regions A and B, period 1947–59 _ ntributing drainage area in hydrologic	13
7. Relation of maximum dischar	ge to 10	and 25-year floods, region A, areas	
8. Relation of maximum dischar 3 and 4	rge to 10 a	and 25-year floods, region A, areas	29
5 and 610. Relation of maximum dischar 11. Relation of maximum dischar	ge to 10 a		30 31 32
	TABL	ES	
2. Maximum stages and discharge	es at gagi	ing stations ng stations us sites and at short-term gaging stations	_ 18
with contributing drainage as			26

Floods in Nebraska on Small Drainage Areas, Magnitude and Frequency

By Emil W. Beckman and Norman E. Hutchison

ABSTRACT

Flood hazard information is needed for small streams as well as for large ones. This report explains methods of defining the magnitude and frequency of floods in Nebraska on uncontrolled and unregulated streams which have about 300 square miles or less of drainage area contributing to surface runoff. Composite frequency curves defined for two flood regions express a ratio of floods with recurrence intervals ranging from 1.1 to 25 years to the mean annual flood. Curves for 10 hydrologic areas were defined to show the relation of the mean annual flood to the contributing drainage area. A flood-frequency curve can be drawn from these two sets of curves for any site in the State within the range of drainage area and recurrence interval that is defined by the base data and not materially affected by the works of man. The two sets of curves are based on all available pertinent data from records of 5 or more years' duration.

This report includes a tabulation of maximum flood peaks at gaging stations used and at a number of miscellaneous sites which have less than 300 square miles of contributing drainage area.

INTRODUCTION

When loss of life is not a factor, it is generally not economically sound to design structures in or across streams for the maximum flood that may occur. Economic considerations will dictate the choice of a design frequency. An evaluation of these economic factors is beyond the scope of this report. It should be noted that the recurrence interval of a flood does not imply any regularity of occurrence. For an example, at any site, two 25-year floods may occur in consecutive weeks or such a flood may not occur in a period of 50 years.

The purpose of this report is to describe methods by which the magnitude and frequency of floods may be determined for most sites in Nebraska for which the drainage area is less than 300 square miles. The report was prepared in the Lincoln office of the U.S.

Geological Survey, under the direction of Floyd F. LeFever, district engineer, Surface Water Branch, in cooperation with the Nebraska Department of Roads. Financial assistance in the preparation of the report was given by the Bureau of Public Roads.

DESCRIPTION OF AREA

PHYSIOGRAPHY

Nebraska has an expansive, gently rolling to rough topography, broken in places by low hills, a few isolated buttes, mesas, ravines, and several relatively shallow, major streams which flow in an easterly direction.

The altitude of the State ranges from 835 feet at the extreme southeast corner to a maximum of 5,340 feet at the western border. The land surface slopes rather consistently to the southeast with an average decline of about 9 feet per mile.

The small streams of Nebraska have a wide variation in slope depending on the topography of their drainage basins. The average fall for individual streams used in this report ranges from about 6 to about 110 feet per mile. The major streams fall from 4 to 8 feet per mile.

SOIL

Most of the soil mantle of Nebraska originated from four major sources. The general location of these soils is shown on figure 1, which is based on reports by the Nebraska State Planning Board (1941), by Condra (1920), and by Jenkins and others (1946), and was used by Furness (1955).

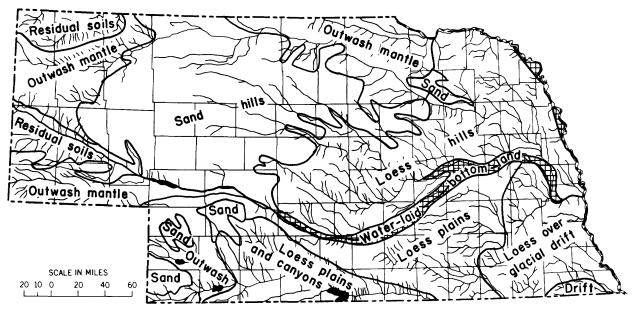


Figure 1. - Generalized areas of soil sources in Nebraska.

Loess silt is the predominant mantle of Nebraska. It is wind transported from both glacial deposits and mountain outwash and is quite uniform in texture but decreases in grain size toward the southeast. It erodes readily when on a steep gradient and usually with a vertical cleavage line. Except for scattered land-locked areas in the headwaters of streams draining relatively level areas of the south-central plains, the drainage patterns are connected and runoff is prompt.

The Sand Hill region, second in areal extent of the four major soil areas, is composed mostly of porous dune sand formed from the weathering and reworking of sandy bedrock and early water and glacial deposits of sand and gravel. Except in the immediate vicinity of the few primary channels, there is no drainage pattern or surface connections to the streams. Rainfall readily reaches the high ground-water table and forms numerous lakes and marshes. Sand Hill streams have a fairly uniform flow which originates from the ground-water table. Flood runoff is minor and comes primarily from the narrow strips of land immediately adjoining the streams.

The outwash mantle from the mountains to the west and northwest is found in several areas along the western and northern parts of the State. The original high-plains surface remains as a variety of topographic forms ranging from comparatively smooth to rolling, as deeply eroded canyons, and as rough broken areas. The soil varies widely intexture. The drainage pattern is generally well defined and runoff is prompt although the slope of each drainage basin is an influencing factor.

Residual soils, the least in areal extent formed in place from sedimentary rocks and are found primarily in several smaller areas of western Nebraska. The ground surface varies from nearly level to undulating, rolling, rough and mountainous. Sedimentary rocks are exposed in the rough badlands. The soil texture also has a wide range in the residual soil areas. The drainage pattern is well defined and runoff is quite prompt.

Water-laid bottom land and areas of glacial drift are exposed to a very limited extent in the State.

CLIMATE

The climate of Nebraska is typical of large interior continental areas in the middle latitude; it is characterized by light average annual precipitation, a great range of precipitation from season to season and year to year, and frequent and abrupt changes in temperature and other weather conditions.

The average annual rainfall shows a gradual progressive increase from 14 inches in the extreme western part of the State to 34

INTRODUCTION 3

inches in the southeastern corner. About 75 percent of the annual precipitation falls during the six-month period April through September and about 42 percent of the annual precipitation falls in May, June, and July. A large part of the summer rainfall occurs during thunderstorms and generally falls at intense rates in short periods of time.

DRAINAGE AREAS

The total drainage area of streams in a major part of Nebraska does not contribute to the surface runoff; therefore, it is necessary to determine both the total drainage area and the area which contributes to the stream by surface runoff. Both total and contributing drainage areas are shown for the stations used; however, owing to the lack of complete coverage of good topographic maps of the State, some of the drainage area figures are qualified as approximate. Some of the small drainage areas were determined from aerial-survey photographs obtained from the U.S. Department of Agriculture, Commodity Stabilization Service.

Nebraska is completely mapped by 1:250,000-scale maps of either 50-foot or 100-foot contour intervals. The scale and contour intervals do not permit reliable determination of drainage areas, especially for smaller, fairly level areas or, differentiation between contributing and noncontributing drainage areas.

Topographic maps, in scales varying from 1:24,000 to 1:125,000 and with contour intervals varying from 5 to 20 feet, have been published for about two-thirds of the State.

CAUSES OF FLOODS

In Nebraska the annual floods on drainage areas of less than 300 square miles generally

occur during the months April through September. There are some spring breakup floods; they occur most frequently in the Sand Hill region where there is a relatively limited range in discharge.

Rainfall is the primary cause of floods. Much of the rainfall results from thunderstorms and ranges widely in amount, intensity, and distribution, so that the relation of the actual amount of rainfall to the flood peak cannot be correlated. Besides the stream basins physiography which is fairly stable, the following conditions also influence the size of floods: (1) antecedent conditions, (2) direction of the storm, (3) variation of soil infiltration rate, and (4) land use and vegetal cover.

FLOOD RECORDS AVAILABLE

Records for 5 or more years in length of the annual floods not materially affected by regulation and diversion are available for 136 stations in Nebraska which have 300 square miles or less in contributing drainage area. In addition, six stations which have more than 300 square miles of contributing drainage area are included because of their strategic location. These six stations are: White River at Crawford, Ponca Creek at Anoka, Plum Creek near Meadville, Long Pine Creek near Riverview, Bazile Creek near Niobrara and Wood River near Riverdale. Table 1 gives a list, in the downstream order, of the stations used, their drainage area size, and a graphical illustration of the length of record of annual peaks. Of the total of 142 stations, 83 are crest-stage gages, most of which are operated in cooperation with the Nebraska Department of Roads to define the annual peak discharge. Figure 2 shows the location of the 142 stations. The symbols on the map identify the type of station and the number shown on the map corresponds to the number preceding the station name in table 1.

Table 1.—Period of record of annual peaks at gaging stations

[Solid bar: Peak stage and (or) discharge. Open bar: Peak stage only]

	John Daff Fear Stage and (of) discharge.		Open bar: reak	Ik stage oury]	Outry J					1
Ž	Gaging station	Drainage area (square miles)	e area niles)	Ar	ınual pe	Annual peak record, water years	ord, w	ater y	ears	
		Total	Contrib- uting	1930	1932	0 7 61	9 7 61	1950	1955	0961
4432 4437 4440 4448	White River tributary near Glen	7.97 52.6 313 14.9	7.97 52.6 313 14.9	(a)						
4535	Ponca Creek at Anoka	410	410							
4563 4564 4577 4578 4585	Niobrara River basin Pebble Creek near Dunlap	23.5 82.2 61.1 26.6	23.5 82.2 61.1 26.6							
4595 4610 4625 4635	Snake River near Burge	620 510 581 390	100 200 330 390					╂		
4665	Bazile Creek near Niobrara	440	440					-		ı
6006 6007 6008 6009 6010	South Omaha Creek tributary near WalthillSouth Omaha Creek tributary 2 near Walthill	2.64 15.1 1.51 51.0 170	2.64 15.1 1.51 51.0					- 		
70.1	Tago (stage ours)									

		INT	RODUCTION			
					11111	
+	<u> </u>					
			<u> </u>			
					111	
		7.4.7				
2.54 4.08 9.73 23.0	1.75 1.55 6.50 13.9 25.4	162 80 80 9.81 19.8	38.3 79.8 229 5.24 28.3	2.10 16.3 58.5 170	14.9 5.19 31 12.9 26.4	44.8 77.9 379 22.2 60
2.54 4.08 9.73 23.0	1.75 1.55 6.50 13.9 25.4	162 267 286 9.81 19.8	38.3 79.8 229 5.24 32.8	2.10 16.3 63 175	14.9 5.19 31 12.9 26.4	44.8 79.6 379 22.2
South Branch Tekamah Creek near Craig	New York Creek tributary near Spiker	Red Willow Creek near Bayard	North Plum Creek near Farnam	East Branch Buffalo Creek tributary 2 near BuffaloBuffalo Creek near BuffaloBuffalo Creek near DarrBuffalo Creek near Overton	Elm Creek near Sumner	Wood River at Oconto
6077 South Bran- 6078 South Bran- 6079 South Bran- 6080 Tekamah C	6086 New York Cree 6087 New York Cree 6088 New York Cree 6089 New York Cree 6099 New York Cree 6090 New York Cree	6840 Red Willow Cr 6870 Blue Creek ned 6920 Birdwood Cree 7671 South Fork Plu 7673 Plum Creek tr	7674 North Plum Cr 7674.1 Plum Creek ne 7675 Plum Creek ne 7681 East Branch B 7682 East Branch B	7683 East Branch B 7684 West Branch I 7685 Buffalo Creek 7690 Buffalo Creek 7691 Elm Creek tri	7692 Elm Creek ne 7693 Elm Creek tr 7695 Elm Creek ne 7707 Wood River n 7708 Wood River n	7709 Wood River a 7709,1 Wood River n 7710 Wood River n 7730 Dry Creek at 7750 Middle Loup I

Table 1.—Period of record of annual peaks at gaging stations—Continued

	Sucrement graphs at graphs of annual of annual statements are graphed statements.	guthnh in	1 1	Continued						
;		Drainage area (square miles)	area miles)	An	nual p	eak re	Annual peak record, water years	water	years	
No.	Gaging station	Total	Contrib - uting	1930	1932	0 7 61	9761	0961	9961	0961
7755 7765 7777 7778	Middle Loup River at Dunning	1,760 1,780 4.77 2.04	80 50 4.77 2.04							
7827 7828 7829 7830 7843	South Branch Mud Creek at Broken Bow	400 15.5 5.98 440 41.9	45.9 10.8 5.98 81.1 41.9							
7845 7847 7855 7860	Oak Creek near Dannebrog	122 27.2 1,890 2,210 1,260	122 27.2 140 180					┸┩╂╂╂	 	
7891 7892 7893 7894	Davis Creek tributary near North Loup	2.29 6.79 21.1 41.6	2.29 6.79 21.1 41.6					7777		
7907 7908 7909 7911	West Branch Spring Creek at Brayton	19.5 36.9 7.63 165	19.5 36.9 7.63 165				╼╅┼┼┦╉╴			
7935 7950 7955	Beaver Creek at LorettoShell Creek at Newman GroveShell Creek near Columbus	311 122 270	100 122 270							

 b Undetermined amount is noncontributing.

Table 1.—Period of record of annual peaks at againg stations—Continued

	Annual peak record, water years	9961 9961 0961 9 1 61												!																				
-Continued	Annual peal	1940 1932 1930																																
1	e area miles)	Contrib-		6.74	13.2	7.5	11.3	.72	13.8	31.8	75.6 ∟	7.2	50	C L	200	243	130	10.01	4.10	27.4	56.6	13.9	90.8	223	30.9	13.1		14.0	4.68	!	15.2	32.0	49.4	81.9
s at gaging s	Drainage area (square miles)	Total		6.74	13.2	130	11.3	.72	13.8	31.8	25.6	2.2	20	ć	273	243	138	10.0	140	27.4	56.6	13,9	8.06	223	30.9	13.1	. r.	14.0	4.68	}	15.2	32.0	49.4	81.9
Table 1.—Period of record of annual peaks at gaging stations	Gaging station	1011000 Street	Kansas River basin—Continued	Elkhorn Canyon near Maywood	Elkhorn Canyon southwest of Maywood	Brushy Creek near Maywood	•	Frazier Creek tributary near Maywood	5 Fox Creek north of Curtis	Fox Creek above Cut Canyon near Curti		Fox Creek at Curtis	Dry Creek near Curtis		Mitchell Creek above Harry Strunk Lake	Muddy Creek at Arapanoe	Turkey Creek at Naponee	Cottonwood Creek near Bloomington	Center Creek at Franklin	West Branch Thompson Creek at Hildreth		West Branch Thompson Creek tributary near Hildreth			Elm Canole of Ambore				School Creek near Saronville		South Fork Big Sandy Creek near Edgar			South Fork Big Sandy Creek near Hebron
	Ż			8392	8394	8395	8396	8397	8398.5	8399	8399.5	8400	8405	,	8415	8440	8200	8502	8510	8511	8512	8513	8514	8515	0630	8807	8807.2	8807.3	8807 4		8836	8837	8838	8839

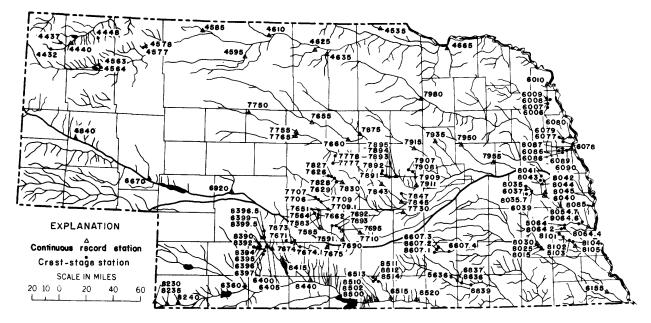


Figure 2. —Map of Nebraska showing location of gaging stations used in flood-frequency analysis.

FLOOD-FREQUENCY ANALYSIS

FLOOD FREQUENCY AT A GAGING STATION

VALUE

A regional frequency curve is considered to be superior to an individual station frequency curve; however, an analysis must be made at each gaging station before a regional study can be started.

The flood history at a gaging station is a record of what has happened at that particular site during the specified period of observation which is relatively short, statistically speaking. Such a record is only a chance sample of the flood potential representing the overall flood-frequency relation and as such may be a poor example for predicting what will happen in the future, even at the same site.

TYPES OF SERIES

There are two methods in general use for studying the frequency of floods: an annual flood series and a partial-duration series.

An annual flood is defined as the greatest momentary peak discharge in a water year (October 1 to September 30). In the annual flood array, the recurrence interval is the average interval in which a flood of a certain magnitude has occurred once as an annual maximum. An objection to the use of annual flood is that the second highest flood in a given high year may outrank many annual floods.

The partial-duration series is a list of all floods above a selected base. The base is generally selected as equal to the lowest annual flood so that at least one flood in each year is included. In the partial-duration series the recurrence interval is the average interval of time between floods of a given magnitude. An objection to the use of the partial-duration series is that the floods listed may not be fully independent events.

A definite relation exists between values in the two series as shown by Langbein (1949) and Chow (1950). The following table shows comparative values of recurrence intervals derived by the two methods:

Recurrence intervals in years

Annual flood series	Partial-duration series
1.16	0.5
1.58	1.0
2.00	1.45
2.54	2.0
2.52	5.0
10.5	10
20.5	20
50.5	50

The annual flood series is used in this report. Where a frequency curve derived from the partial-duration series is desired, an annual-flood curve can be converted to the partial-duration series curve by the relation expressed in the preceding table.

PLOTTING POSITION

The analysis of flood data starts with a listing of all the annual peaks at a gaging station. These are ranked according to magnitude starting with 1 as the highest. A time scale must be computed, to obtain a plotting position for the frequency scale. There are several methods, but the one used by the Survey and in this report is

$$T = \frac{n+1}{m}$$

where

T is the recurrence interval in years,

n is the number of years of record,

m is the order of the mganitude of the flood, the highest being 1.

In the study of historical floods, n is the number of years in which it is known that the flood was of the order assigned.

Annual floods are plotted on a special form devised by Powell (1943) on which the discharge is plotted on a linear scale as the ordinate and the recurrence interval on a scale graduated on the basis of the theory of extreme values as the abscissa.

HISTORICAL DATA

Historical floods can be used to extend the frequency curve of a station to cover a longer period. Historical data, however, are usually confined to stages or comparison of stages above a high base and it is important to define their order of magnitude with respect to a period of time. Historical information on small streams is more difficult to obtain than on larger streams because the duration of the flood is quite short and the number of people affected is very limited. Care must be exercised in assigning discharge values to historical stages because of possible channel changes.

Some information on historical floods was obtained, usually from local residents. Gen-

erally it is confined to the maximum flood during the memory of one or possibly several individuals. Some of the stages noted are beyond the limits of the defined stagedischarge relation, and a discharge could not be estimated.

FITTING FREQUENCY CURVES

After the flood discharges for each station have been plotted against their computed recurrence intervals, a curve is drawn on the basis of the plotted points. The relatively short length of most streamflow records and the probable inaccuracies of small samplings do not warrant analytical curve fitting. Therefore, a visual best fit smooth curve is used in this report to average the points. It is known that the maximum flood or floods of record may have a recurrence interval considerably greater than the period of record. Therefore, in drawing a best fit smoothfrequency curve, more weight is given to the lower floods than to the higher floods. Figure 3 shows a plot of the frequency of annual floods for Plum Creek near Smithfield, Nebr.

LIMITATIONS OF A SINGLE STATION ANALYSIS

Generally the 25-year or the 50-year flood is selected as the design flood. Table 1 shows that there are no gaging stations in Nebraska

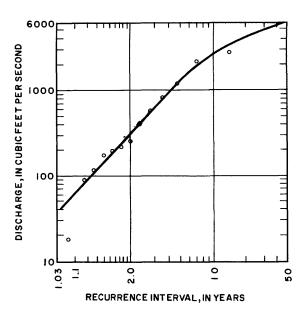


Figure 3. —Frequency of annual floods, Plum Creek near Smithfield, Nebr.

with less than a 300 square mile drainage area which have 50 years of record of annual peaks and that there are only 5 stations which have more than 25 years of record of annual peaks. Of the total 142 stations, 113 have only 10 years or less of record of annual peaks. To define a 25-year or 50-year flood would require extensive extrapolation from the trend of the plotting position of lesser floods. The error of the curve could be considerable at its outer extremity.

The random manner in which flood events are distributed with respect to time is another limitation to frequency graphs based on records at a single station.

The maximum departure to be expected between flood magnitudes or frequencies computed from relatively short records and their true (long-term) values increases with the magnitude of the flood and decreases with the length of record (Benson, 1960). The following table, based on Benson's study, shows the length of record required at a single site to define the frequency of floods of various magnitudes with 10 and 25 percent of the true value 19 out of 20 times.

Magnitude of flood, in recurrence	Length of rec	ord, in years
intervals	10 percent	25 percent
2.33-year	40	12
10-year	90	18
25-year	105	31
50-year	110	39

Although the figures in the above table are based on a hypothetical study, they give an indication of the possible errors, from chance alone, in frequency graphs based on short-term records for a single station. A comparison of the lengths of stream records available in Nebraska on drainage areas of 300 square miles and less (table 1) with those indicated by Benson (1960) suggests that very few records in the State are long enough to define reliably the mean annual flood, and the floods of infrequent occurrence are less accurately defined. Analysis on a regional basis is used as a solution to the flood-frequency definition.

REGIONAL FLOOD-FREQUENCY ANALYSIS

Aflood-frequency curve based on a number of stations has greater reliability than a curve from a single station. In order to com-

bine the records for a number of stations, two requirements must be met. The first condition is that all the records must be reduced to a common time basis or base period, and the second is that the stations must have frequency graphs of the same general shape and slope, within limits of chance, so that they may be considered homogeneous.

BASE PERIOD

Table 1 shows graphically the length of usable records at the 142 gaging stations. Not all stations have records of the same length. If they are to be combined, records must be on the same time basis. The actual length of a short-period record of at least 5 years' duration can be extended by correlation with the long-term record of a nearby station. This correlation, however, is more sensitive for small streams than for larger streams and requires a long-term station in the immediate vicinity. Therefore, because there is such meager distribution of longterm stations within the State, the base period selected is 1947-59. Inasmuch as this base period is so short, it was also necessary to analyze records for 33 long-term stations having drainage areas greater than 300 square miles. This analysis was made for the period 1929-59 in order to establish the relation of the short base period to a 31year period.

The actual record at each station either included or was extended to the 13-year base period, and for the 33 long-term stations mentioned above, to the 31-year period by computing a discharge figure for each year of no record. These computed discharges, which are based on correlation with records for long-term stations, are used only to assign the more nearly correct order numbers to annual peaks of record.

DEFINITION OF MEAN ANNUAL FLOOD

According to the theory of extreme values as applied to floods by Gumbel (1945), the arithmetic mean of the annual peak discharges in an infinitely long series is equal to the discharge corresponding to the 2.33-year recurrence interval. This definition is generally accepted, and the 2.33-year flood determined graphically is used as the mean annual flood for this report. Annual-flood

data for each of the individual gaging stations were adjusted to the 13-year base period (1947-59).

HOMOGENEITY OF RECORDS

The test for homogeneity of records involves determining whether differences in slopes of individual frequency curves are greater than might occur by chance in random sampling. This statistical test has a 95-percent confidence level, that is, one station in 20 may plot outside the limits of the test graph. The slope of each individual station frequency curve is expressed by the ratio of the 10-year flood to the mean annual flood. The average ratio derived from the group was multiplied by the mean annual flood for each individual station and the corresponding recurrence interval was determined from the station frequency graph. The recurrence interval thus obtained was then plotted against the effective length of record in years on the specially designed test graph. The effective length of record is the number of annual floods of record plus one-half the number of estimated annual floods used to complete the base period.

The test applied to the 142 gaging stations used in this report indicates two homogeneous flood regions in Nebraska which are designated as regions A and B. The regional boundaries are shown in figure 4. Region B

is the Sand Hills, and region A consists of the remaining part of the State. There are 132 stations in region A and 10 stations in region B.

GOMPOSITE FREQUENCY CURVES

In order to compare flood records at different gaging stations and combine them to define composite flood relations, it is necessary to convert the floods to a dimensionless basis. This was done by computing the ratio of floods of selected recurrence intervals to the mean annual flood for each gaging station in a homogeneous region. The median ratio of each selected recurrence interval was then plotted against the corresponding recurrence interval to give the composite frequency curve for each homogeneous region (fig. 5).

RELATIONS OF MEAN ANNUAL FLOOD

The composite frequency curves as derived in the preceding section define dimensionless ratios of the mean annual flood to floods of other recurrence intervals. In order to define the flood-frequency curve in terms of discharge for a specific site, the magnitude of the mean annual flood is required. The magnitude of the mean annual flood is obtained by relating it to measurable characteristics of the drainage basin.

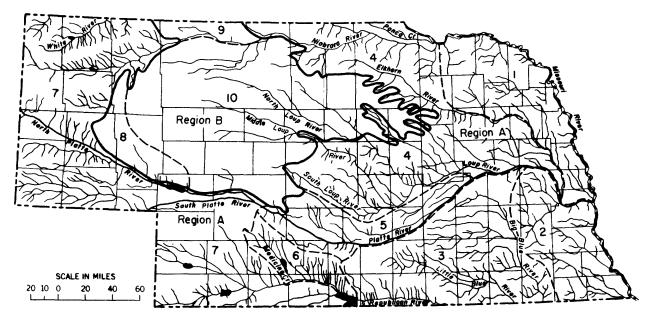


Figure 4. -Map of Nebraska showing flood-frequency regions and hydrologic areas.

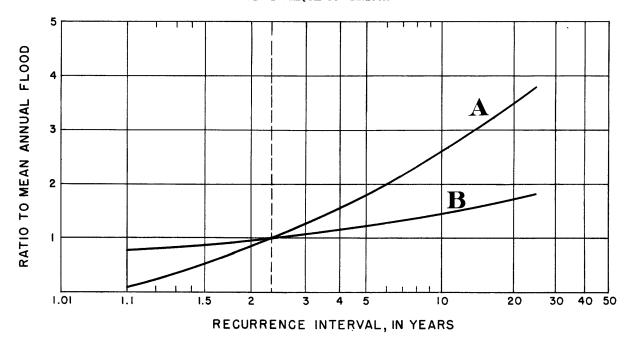


Figure 5.—Composite frequency curves of annual floods, regions A and B, period 1947-59.

The physiographic factors which may influence the mean annual flood at a given point are size of the drainage basin, shape of the basin, alinement of the basin with the prevailing direction of storm travel, channel storage, artificial or natural storage in lakes or ponds, slope of stream, land slope, stream density, stream pattern, altitude, depth and porosity of soil mantle, vegetal cover and land use. Some of these factors are difficult to evaluate and therefore cannot be used in a correlation.

The mean flow of a stream is a hydrologic measure that integrates all factors of runoff and thus includes an indication of flood potential. Because the majority of the station records used in this report are from crest-stage gages at which total runoff is not measured, the mean flow had to be determined from streams which have larger drainage areas and which are not always strategically located.

The mean annual flood was correlated graphically with contributing drainage area, mean flow, stream slope, and shape of basin factor. The drainage area size, the mean flow, and stream slope are all significant factors, drainage area and mean flow being the most significant. The correlations, however, do not give consistent results and inasmuch as mean flow was inadequately defined, the contributing drainage area alone was

used to define a relation with the mean annual flood. Along with variations in mean flow, other factors or combination of factors that influence floods are not reflected in the size of the basin, but their effect is related in areas having somewhat similar physical features. Accordingly, the State was subdivided into 10 hydrologic areas shown in figure 4. Except for the boundaries of the regions A and B which are also boundaries of hydrologic areas, the boundaries of the hydrologic areas follow the drainage divides or major streams.

Records for the 33 long-term stations mentioned under "Base Period" above were used in order to define mean annual flood relations with respect to time. The graphical definition of the mean annual flood for the 31-year (1929–59) base period was compared to the mean annual flood defined by the 13-year (1947–59) base period at each of the 33 individual stations which are distributed around and within the State. This study revealed that the average correction factor required to adjust the mean annual flood from the 13-year period to the 31-year period in the 10 hydrologic areas is as follows:

Area	Correction factor
1 and 2	0.816 .925 1.00 1.08

The above adjustments are reasonably well established in all areas except in area 7 where there is considerable spread in results for individual stations used to define the average correction.

The mean annual flood for each station determined from the 13-year period was corrected by the average correction factor for the hydrologic area in which the station was located. For each of the 10 hydrologic areas, the corrected mean annual flood for each station in that area was plotted against the contributing drainage area for the station. Curves were drawn to average all the data in each area. The variation of mean annual

flood with contributing drainage area for each of the 10 hydrologic areas is shown in figure 6.

HYDROLOGIC AREAS

Area 1, as shown in figure 4, is the northeast corner of the State. It includes all the smaller streams downstream from the Niobrara River and upstream from the Platte River which are direct tributaries of the Missouri River. It also includes the left bank tributaries of the Elkhorn River which are downstream from the Sand Hill area. The area is generally quite hilly. The variation of the mean annual flood with drainage area is defined by 15 stations.

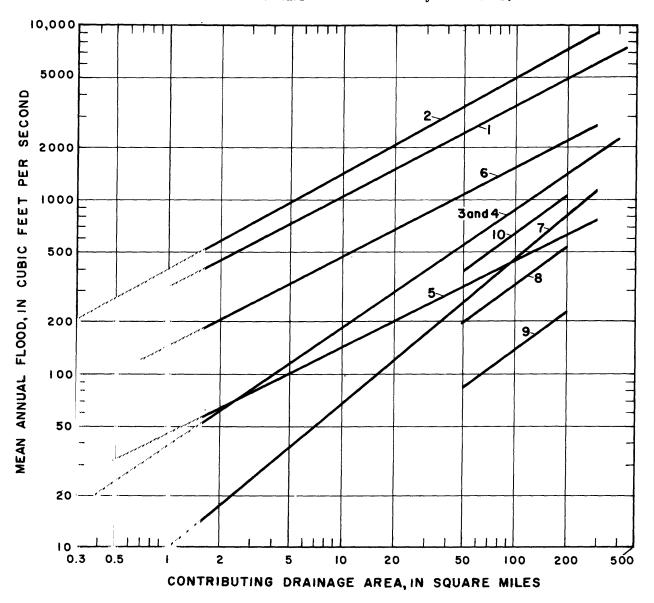


Figure 6. -Variation of mean annual flood with contributing drainage area in hydrologic areas 1-10.

Area 2 is the southeast corner of the State. It includes Salt Creek, a tributary of the Platte River, and all direct tributaries of the Missouri River in the State downstream from the Platte River. This area is also quite hilly except for a flat area in Saunders County which probably is the remains of an old Platte River channel. The five Silver Creek stations included in this report are in this flat area and their drainage areas include many depressions which trap water and prevent it from reaching the stream. Available topographic maps for this flat area do not distinguish between the contributing and the noncontributing area. Twenty-five stations are in area 2, but because the contributing drainage of the five Silver Creek stations is not defined, the curve of variation of mean annual flood with drainage area is drawn on the basis of the data from the 20 remaining stations. The mean annual floods are higher than those in area 1 because of the greater mean annual rainfall and resulting greater mean flow.

Area 3 (fig. 4) consists of the south-central plains of the State. It contains the Big Blue River, the Little Blue River, and the tributaries of the Republican River downstream from Harlan County Dam. The headwaters of these streams drain gentle sloping land, and there are some depressions which trap runoff and prevent it from reaching the streams. Seventeen stations are used to define the variation of the mean annual flood with drainage area.

Area 4 (fig. 4) includes Ponca Creek, the tributaries of the lower part of the Niobrara River, the upper part of the Elkhorn River and all its right-bank tributaries, the Loup River basin downstream from the Sand Hills. and the left-bank tributaries of the Platte River between the Loup River and the Elkhorn River. This area has a wide variety of topography and soils. Flood flow at some of the stations is materially affected by the proximity of the porous Sand Hills. Generally, it is possible to determine the contributing drainage area if good topographic maps are available. Good topographic maps have not been made for this area; therefore, some of the drainage areas are listed as approximate. Twenty-eight stations are used to define the variation of the mean annual flood with the contributing drainage area. The resulting curve is so similar to that for area 3 that one curve is shown on figure 6 as representative of both hydrologic areas.

Area 5 (fig. 4) includes the small tributaries of the Platte River in the central part of the State. The area contains some low rolling hills at the headwaters of the streams and at the perimeter of the area but toward the interior the land and stream slopes become less. As the drainage area increases, channel storage becomes a factor in reduction of the mean annual flood. Twenty-one stations are used to define the variation of the mean annual flood with drainage area.

Area 6 (fig. 4) includes the Medicine Creek basin and all left-bank tributaries of the Republican River between Medicine Creek and Harlan County Dam. This area is very hilly and contributes to surface runoff, except for the upper reaches of the Medicine Creek basin where part of the Sand Hills is located. Thirteen stations are used for defining the variation of the mean annual flood with the drainage area.

Area 7 (fig. 4) is the western part of the State that includes drainage basins of the Republican, South Platte, North Platte, Niobrara, and White Rivers. This area has a wide variety of topography and soils. Some parts of the Republican River basin have depressions and sandy areas which do not contribute to surface runoff. Thirteen stations are used to define the relation of the mean annual flood to the contributing drainage area. The definition in area 7 is considered to be the poorest in the State.

Area 8 is the southwestern part of the Sand Hills as shown in figure 4; it is defined on the basis of only one station record. The station frequency curve indicates that mean annual floods are considerably lower than those defined in area 10. The relation of the mean annual flood to contributing drainage area is defined by the one station and the slope of the relationship curve defined in area 10.

Area 9 (fig. 4) is the part of the Sand Hills north of the Niobrara River. As in area 8, only one station record is available. The station frequency curve indicates that mean annual floods are considerably lower than those in area 10. The relationship curve, as shown in figure 6, is based on the one station record and the slope of the relationship curve defined for area 10.

Area 10 (fig. 4) contains the greater part of the Sand Hills which generally drain to the south and east. Only the area immediately adjacent to the streams contributes to surface runoff; the high base flow comes from ground water. The contributing drainage areas of the eight stations in this area are not very well defined and are listed as approximate. The range in size of the contributing drainage area is from 50 to 140 square miles.

The definition of the mean annual flood with respect to contributing drainage area covers the range of drainage area from 1 to 300 square miles in hydrologic areas 1-7. The range of drainage area defined in areas 8-10 is from 50 to 200 square miles.

APPLICATION OF REGIONAL FLOOD-FREQUENCY DATA

TRIBUTARY AREAS OF NATURAL RUNOFF

This section gives step-by-step procedures for determining the magnitudes of floods in Nebraska having any recurrence interval up to 25 years at any site not subject to manmade regulation or control that has a contributing drainage area between 1 and 300 square miles in region A and between 50 and 200 square miles in region B (fig. 4).

- 1. Determine the total and contributing drainage areas at the site. The contributing drainage area is that part of the total basin area that contributes directly to surface runoff.
- 2. From figure 4, obtain the number of the hydrologic area and the flood region in which the site is located.
- 3. With the contributing drainage area (step 1) and the number of the hydrologic area (step 2), determine the mean annual flood for the site from figure 6.
- 4. With the flood region (step 3) determine the ratio to the mean annual flood for the flood of the selected frequency of recurrence from figure 5.
- 5. Multiply the ratio of the selected flood to the mean annual flood (step 4) by the mean annual flood determined in step 3 to obtain the flood magnitude at the site. If a complete frequency graph is desired, repeat steps 4 and 5 for a number of recurrence intervals.

It must be emphasized that the curves cannot be extrapolated with confidence beyond the limits of the base data from which the curves were derived.

STAGE OF FLOOD DISCHARGE

This report deals specifically with the frequency of flood discharges. Flood stage corresponding to these discharges may also be of primary concern in the design of certain structures and in other related studies. For rock-lined or firm-bedded streams at sites not subject to variable backwater from downstream inflow or structures, a stage-discharge relation provides a ready solution to the problem. For shifting-channel streams of Nebraska and where variable backwater may exist, the stage corresponding to the selected discharge may be approximated only after extensive research. If the stage is to be investigated, the engineer will find the site in question to be in one of two categories:

- 1. Site at or near an established gaging station. Gaging stations have been maintained at several hundred sites in Nebraska. Locations of those established prior to September 30, 1950, are described in reports of the Geological Survey (Water-Supply Papers 1309) and 1310). Stations established since 1950 are described in the annual series of watersupply papers entitled "Surface Water Supply of the United States." A reasonable stagedischarge relation has been established at each of the small-area stations used for this report, and may be examined in the Lincoln office of the Geological Survey. For sites at or near gaging stations, it is usually possible to obtain stage data that are adequate for most purposes.
- 2. Site not near an established gaging station. The stage corresponding to a discharge of selected recurrence interval must generally be obtained through the medium of a stage-discharge relation. The extent of the investigation required to establish such a relation will depend upon the accuracy requirements. The following methods of deriving a stage-discharge relation are noted in decreasing order of reliability. (a) If the need for data can be anticipated far enough in advance, discharge measurements may be obtained to define the relation up to the maximum discharge observed in the period. The

relation may be extended by the application of measured channel characteristics to appropriate hydraulic formulas. Shifting-channel characteristics may be investigated by studies of bed material and some long-term changes may be obtained from local residents. (b) If the need for data is immediate, the discharge for a past flood may be computed by hydraulic formulas if adequate floodmarks can be recovered and one point on the stagedischarge relation curve thereby established. A direct measurement of discharge at the time of the visit will provide one other point. (c) A method has been used to develop ratings for stable channels from the product of the stream slope at zero flow or low flow and characteristics of conveyance at a typical cross section. This method is unsuited to streams with unstable channel beds.

MAXIMUM KNOWN FLOODS

The design of major hydraulic structures whose failure may cause loss of life should consider the maximum probable flood rather than one that may be expected to occur in a defined period of years. A prerequisite to such an analysis is the record of maximum known floods.

Maximum known stages and discharges at the 142 gaging stations used in the floodfrequency analyses are shown in table 2. The stations are listed in downstream order and the number preceding the station name corresponds with the numbers shown in table 1 and figure 2. The flood region and hydrologic area in which the station is located is shown as well as the total and contributing drainage area. The contributing drainage area is used to compute the peak discharge in cubic feet per second per square mile. The period of known floods is that for which the stage or discharge is known to be the greatest. The stage is given for each maximum discharge except for stations 7730 and 7829. The discharge at these two stations had been determined from an indirect measurement prior to the establishment of the gage and there is no datum tie between the survey and the gage. Where the maximum stage and the maximum discharge are not concurrent, a change in the stage-discharge relation is indicated, and no discharge figure is shown for the maximum stage. Some periods of known floods for the maximum stage are extended on the basis of recovered floodmarks beyond the period of known floods for the maximum defined discharge. For such periods, a leader line has been placed in the discharge column to indicate that the discharge for this known stage could not be defined within allowable limits of accuracy. A leader line in other columns is also used to indicate that the information could not be determined.

Twenty-five unusual peak discharges have been collected at miscellaneous sites or at short-term gaging stations which have 300 square miles or less contributing drainage area. These data are shown in table 3. The sites are listed in downstream order. Gaging stations having records of insufficient length to be included in the flood-frequency analysis have been operated or are being operated at numbered sites. Unnumbered sites are miscellaneous sites where only one observation has been made.

As shown in figure 5, there is a great difference in the composite frequency curve for region A and for region B, and the curves of figure 6 show that the mean annual flood for a given drainage area can vary considerably between hydrologic areas. A separate illustration was developed, therefore, for each of the 10 hydrologic areas on which the 10- and 25-year recurrence interval floods are shown as a curve to compare with the maximum discharge at the stations and miscellaneous sites in that hydrologic area. The maximum discharge at the 142 stations used in this frequency analysis are shown as open circles, and the maximum discharge at the miscellaneous sites and short-term gaging stations which are listed in table 3 are shown as closed circles. The gaging stations are identified by the last four or five digits of the index number, in order to correspond with those shown in tables 2 and 3.

The relation of the maximum discharge to the 10- and 25-year floods in the 10 hydrologic regions are shown in figures 7-11.

Table 2.—Maximum stages and discharges at gaging stations

		4. — Mul	แนก รเนย	es ana aisci	iable 2.—maximum stayes and discharges at gaging stations	e gargi	attons					
		Flood	Drains	Drainage area		M	Maximum	stage and	d discharge	arge	Station	Ratio
Number	Gering etetion	region and	(squar	(square miles)	Period of			Gage		Discharge	mean annual	of maxi-
		hydro- logic area	Total	Contrib - uting	known floods		Date	height (feet)	Cfs	Cfs per square mile	flood (Q_2,33 in cfs)	mum to Q_2.33
	White River basin											
6A-4432	6A-4432 White River tributary near Glen	A7	7.97			Sept.						9.4
4437 4440	4437 Soldiers Creek near Crawford	A7 A7	52.6 313	52.6 313	1955–59 1931–44,	July Mar.	10, 1958 15, 1948		0 3,970 8 42,000	75.5 6.4	691 961	5.7
4448	4448 Chadron Creek near Chadron	A7	14.9	14.9	1948-59 1953-59	July Aug.	10, 1958 29, 1954	8 7.7 4 13.72	2 1,610	108	238	6.8
	Ponca Creek basin											
4535	4535 Ponca Creek at Anoka	A4	410	410	1949–59	Apr.	2, 1950	0 15.0	6,770	16.5	1,850	3.7
	Niobrara River basin											
4563	4563 Pebble Creek, near Dunlap	A7	23.5	23.5	1953 - 59	July			8 2,740		299	4.9
4564	4564 Cottonwood Creek near Dunlap	A7	82.2	82.2	1948,	July	28, 1951		20.1028,100	342	1,296	21.7
4577		A7	6.1	1	1951 - 59	May	24 1958	8 17 86	6 4 4 28 4	7.3	92	ις 80
4578	4578 Antelope Creek tributary near	A7	26.6	26.6	1953-59	June	17, 1955		μ,	-	63	30.2
1	Gordon.	ç	0	C	9	,						•
4585	4585 Bear Creek near Ell	697	360	Σ	1948-53, May	May	20, 1951 14 1953	3 65.20	143	F. 1	C11	1.3
4595	4595 Snake River near Burge	B10	620	100	1948-59	Feb.				1 1		
						May						1.2
4610	4610 Minnechaduza Creek at Valentine	A4	510	200	1948-59	Mar.		-				4.8
4625	Plum Creek near Meadville	A4	581	330	1948-59	May			6 4820	2.5	536	1.5
4635	4635 Long Pine Creek near Riverview	A4	390	390	1949-53,	June Aug.	19, 1953 20, 1951	1 10.24	4 5,410	13.9	1,200	4.5
	Bazile Creek basin				1900							
4665	4665 Bazile Creek near Niobrara	A1	440	440	1951–59	June	16, 1957		19,96 68,600	156	9,790	0.7
	-											

									M	AXIMUI	M K	NOM	N F	TOOL	15										
	4.1	8,3 5,1	7.6	3.5		3,9	2.6		3,0	2.0		3.8	4.0	3.0	4.6	!	3,1			1.8 2.6	1 1 1	2 8	2.7	 	
	343	1,220	1,470	4,080		661	694	(1,060	2,190		359	392	1,040	1,320	! ! !	1,760		; ; ;	1,260	! ! !	470	440	 	150
	534	669	278	84.7		1,020	441	(322	191		789	020,1	486	433	! ! !	217		 	14.3		22.1	119	 	105
	1,410	10,100	14,200	14,400		a2,580	a1,800		3,130	4,400		1,380	1,580	3,160	6,020	 	5,500		! ! !	2,320 8723	!	1 770	1,170		2,070
	14.57	18.71 12.90	24.92			21.3	19,3		20.17	14.26 15.10		16,19	17.80	23.40	24.14	£20.8	e19.5			7.33 f4.46	f4.93	4 35	13.88	1948 a.h18.8	13,36
	, 1957	, 1954 , 1954		$\frac{1940}{1958}$, 1950	1	1	1954	, 1950 , 1958		, 1957	, 1957	! ! !		, 1944	, 1950			, 1956 , 1938	, 1945			1948	8, 1951
	ne 16,	ne 21, ne 20,	-	ne 4, Ly 2,		ly 15,	qo		r. 21,	ly 15, g. 13,			ne 21,	1		ne 11	ly 15,		-	ly 3, ay				67	
	June	June		June		July	r		Apr.	July Aug.			June			June	July			July May				June	Ju
	1950–59	1950–59 1950–59	1951-59	19 2 0—59 1946—59		1950-59	1950–59	1	1950–59	1950–59		1952-59	1951 - 59	1951–59	1950-59	1944, $1946-59$	1944, 1946—59		1932 - 59	1931–59	1029 50	9	1951 - 59	1925-59	1951–59 June
	2.64	15.1	•	1.40		2.54	4.08		9.13	23.0	TPT-Vacation	.75	1.55			25.4			162	80	Co	3	9.81	19.8	
	2.64	15.1 1.51	51.0	170		2.54	4.08		9.73	23.0		1.75	1.55	6.50	13,9	25.4			162	267	206	3	9.81	19.8	
	A1	A1 A1	A1	A1		A1	A1		Al	A1		A1	A1	A1	A1	A1			A7	B8	010	71	A5	A5	
Omaha Creek basin	South Omaha Creek tributary near Walthill.	South Omaha Creek near Walthill South Omaha Creek tributary 2 near		Omaha Creek at Homer	Tekamah Creek basin	South Branch Tekamah Creek near	Craig. South Branch Tekamah Creek		South Branch Tekamah Creek near	T	New York Creek basin		ž_	Spiker. New York Creek north of Spiker		New York Creek at Herman		Platte River basin	Red Willow Creek near Bayard	Blue Creek near Lewellen	Disalmond Canal was House		S	near Farnam. Plum Creek tributary at Farnam	
	9009-8	6007 6008	6009	6010		2209	6078		6019	6080		9809	6087	6088	6809	0609			6840	6870	0600	0360	7671	7673	

See footnotes at end of table.

Table 2.—Maximum stages and discharges at gaging stations—Continued

			0	0								
		Flood	Draina	Drainage and		Ma	Maximum		stage and discharge	rge	Station	Ratio
Mirrohon	Coming atotion	region and	(square	(square miles)	Period of			Gage	Disch	Discharge	mean annual	of maxi-
Jagiimn	Gaging station	hydro-			known	, p	Date	height		Cfs ner	flood	H
		logic area	Total	Contrib- uting	floods	1		(feet)	Cfs	square mile	(Q_2,33 in cfs)	to Q_2.33
	Platte River basin—Continued											
6B-7674	North Plum Creek near Farnam -	A 5	38.3	38.3	1947,	June	22, 1947	7 e17.8	 	!		
7674.1	 	A5	79.8	79.8	1951 - 59 $1951 - 59$ 1947	June June	8, 1951 22, 1947	1 e14.3	385	10.1	200	1.9
					1951-59	Anr	22 1957	12.20	170	2.1	140	1.2
7675	Plum Creek near Smithfield	A5	229	229	1947-59				۵,	12.2	410	8.9
7681	East Branch Buffalo Creek	A5	5.24	5.24	1951-59	July	19, 1958		208	39.7	09	3,5
7682	tributary near Buffalo. East Branch Buffalo Creek near	A5	32.8	28.3		1	1	a,h19,4	 	 		!
1	Buffalo.			•	1951-59	July	19		1,570	55.5	170	9.2
7683	East Branch Buffalo Creek	A5	2,10	2.10	1951-59	June	12, 1958	8 12.52	172	81.9	40	4.3
	tributary 2 near Buffalo.										,	1
7684	West Branch Buffalo Creek near	A 5	16.3	16,3	1951–59	July	19, 1958 	8 15.81	475	29.1	85	o.c
7885	Builaio.	A 5	83	ς α	1947_59	Tune	22 1 047	7 e18 4	000 6	154	260	34.6
7690	Buffalo Creek near Darr Buffalo Creek near Overton	A5	175	170		July	12, 1958 12, 1958			2.3	225	1.7
										1		,
7691	Elm Creek tributary near Overton	A5	.54	.54		July	10, 1958			263	54	2.6
7692	Elm Creek near Sumner	A 5	14.9	-	1951 - 59	do				18.2	100	2.1
7693	Elm Creek tributary 2 near	A5	5,19	5,19	1951–59	op		13,03	276	53.2	203	1.4
7000	Overton.	<	21	21	1025 52		1035	F 1500 99				
080	EIIII Creek near Overton	ď	10	10	1947-58	June	22, 1947		8,000	258	380	21.1
7707	Wood River near Lodi	A 5	12.9	12.9	1952-59	June	16, 1955			11.0	06	1.6
7708	Wood River near Oconto	A 5	26.4	26.4	1950,	June	17, 1954	4 14.47	190	29.9	009	1.3
j		ı.			1952-59	-		- 1	- !		0 1 4	
7.109	Wood River at Oconto	A5	44°X	44°X	1950,	Juty	19, 1950	10.00	086,3	0.00	4 20	0.0
7709.1	7709.1 Wood River near Lomax	A 5	79.6	77.9	1952-59	July	19, 1958	8 19.67	1,470	18,9	320	4.6

_	: :	!	!		l i		_			_		· -		- ··· - !		!			. !			!	:	_	_			_	ļ
28.2 1.9	1.2		7.1	1.8	12.6	15.8	2.5	94.9		8.0	90.3	9		1.4	2.4	1	٦	1.4		1.9	2.0			0. 0.	7.0	3.7		2.7	2.1
710 570	372	670	0 1	564	74	37	74	7.4	+	194	7	ť		416	601	1 1 1	1,210	1,180		840	1,400	 	1 1	558	770	194		692	1,040
52.8 46.6	7.6		10.4	19.9	195	287	428	30 0	2	144	120	100		7.4	33.9	 	15.4	58.8		11.4	15.7			9.6	080	106		86,3	53.4
20,000 1,100 586	457	000	000	966	930	585	184	1 790	2	1,550	1	000,1	870	009	1,420	 	1,880	1,600		စ်	g2,830			1,060	906-	722		1,820	2,220
19.75	2.09	7.02	5.21	3.18	e12.2	e12,4	12,43	16 41	•	16,16			e 14.80	9.48	\vdash	e19.0	17.23	e17.50	4.20		6.50	မ တ ့ ည	5,19	3,76	T (* (#	16.82		15.68	19,35
22, 1947 6, 1949 27, 1953				-	22, 1947	12, 1951	8, 1958	7 1956	•	1	1048	-	21 1951	-	3, 1951	1	-	9, 1950	Feb. 25.26.1950	14, 1951	•		٠ ١	6, 1951	7	4, 1957			6, 1957
June 2 June May 2	,		Jan. 1		ne	Aug. 1	July 1	_	1	-op	7/0	way 6	Tuly 2			1 1		July	Feb. 25.	June 1	\sim	Feb. 2	_	May 1	ant	July 1		-op	June 1
1946—59 1949—53 1950—53	1	1946–59	1946-59	LC,	1947-59	1951–59	1951–59	1948_59	•	1951–59	1 7	1951-59	1951-59	1949-56	1950-59	 	1950-57	1950, 1953—59	1946-51		1937-59		1941 - 59	<u>.</u>	1901–08	1951–59		1951 - 59	1951–59
379	09	80	20			2.04	.43	45.9	9	10.8	90	0.0		81.1	41.9	122		27.2	140		180		110	c	67.7	6.79		21.1	41.0
379	1,140	1,760	1,780		4.77	2.04	.43	400	 P	15,5	00	00.0		440	41.9	122		27.2	1.890		2,210		1,260	6	87.7	6.79		21.1	41.0
A5 A5	B10	B10	B10		A4	A4	A4	44	117	A4	~	 G		A4	A4	A4		A4	B10		B10		B10		A4	A4		A4	A4
Wood River near Riverdale Dry Creek at Cairo	Middle Loup River near Seneca	Middle Loup River at Dunning	Dismal River at Dunning	D	Lillian Creek near Broken Bow	Lillian Creek tributary 2 near	South Branch Mud Creek	tributary near Broken Bow.	Broken Bow.	North Branch Mud Creek at	Broken Bow.	Broken Rom	Di Oroni	Mud Creek near Broken Bow	Oak Creek near Loup City	Oak Creek near Dannebrog		Turkey Creek near Farwell	North Lone River at Brewster		North Loup River at Taylor	;	Calamus River near Burwell		Davis Creek tributary near	Davis Creek tributary 2 near	North Loup.	Davis Creek near North Loup	Loup.
7710 7730	7750	7755	7765		7777	7778	7826	7897	30	7828	7050	670)		7830	7843	7845		7847	7855))	7860	ļ	7875	0	(891	7892		7893	(894

See footnotes at end of table.

Table 2.—Maximum stages and discharges at gaging stations—Continued

	Ratio	of maxi-	ы	to Q_2.33			2.2	3.4	1	1,1		8.9		'n	4.5	 	4	5,3		1.3	1	3,3	6°8			4. 4 ບໍດ			6.6
	Station	mean annual		الاج-2,33 in cfs)		802	1,660	1,200	1	202	1,410	265	0	1,260	2,680	1 1 1 1	1,490	648		408	1 1 1 1	784	7,510	224	0	2,860	1,000	2,700	4.570
	rge	arge	Cfs per	square mile		18.3	190	109	1 1 1	28.2	32.4	80.0		45.7	98.4	1 1	22.1	17.9		471	1 1 1 1	455	385	1,774		842	464	220	167
	d discharge	Discharge		Cfs			3,700	4,040	} []]	215	5,350	k4,000	i I		12,000	 		^a 3,400		528	1 1 1	2,600	67,000	220		12,800	130	9,600	45.300
0	stage and		rage hei <i>g</i> ht	(feet)			^a 18.4	17.20	13.78	11.79	1953° 124.56	7.50			20.20	e21.7		e 7.22		7,95	9,93		e 2	13,90	0	30.68		22.36	e23.22
Continue	Maximum		e.				16, 1945	10, 1953	5, 1958		10, 1953	23, 1947			18, 1950	2, 1947		21, 1947		10, 1958	2, 1956		8, 1950	1,1951		1, 1951	٠.	. :	2, 1959
- curoun	Max		Date					May 1	Apr.	2					July 1	June		June 2		July 10	July					May 31		Ö	
e garguy 11		Period of	known	floods		28	1945-59	1951–59	1952-59	1952—57,	-59	53,	59	55	892-	1959 1913—59				1954—59	1954-59			1950-59		6C-TC6T	1050 50		1910–59 Aug.
usc:idiges i	e area	miles)		Contrib- uting			19.5	36.9	7.63	<u> </u>		20			122	270		190		1.12	5.72		174	.31		7.01	νο α	43.7	272
maximum stuges una aisciniges at huging stations—Continuea	Drainage area	(square miles)		Total (94	19.5	36.9	7,63		165	794	,	34.1	122	270		320	,	1.12	5.72		174	.31	C L	7.61	00 8	43.7	272
MUAIMMIN	Flood	region and	hydro-	logic area		A4	A4	A4	A4		A4	A4	•	A4	A4	A4		A4		A2	A2		A2	A2	•	A2	4.9	A2	A2
7 alge 1			daging station		Platte River basin—Continued	Davis Creek near Cotesfield	West Branch Spring Creek at Brayton.	West Branch Spring Creek near Wolbach,	Mary's Creek at Wolbach		Spring Creek near Cushing	-	:	Beaver Creek at Loretto	Shell Creek at Newman Grove	Shell Creek near Columbus		South Fork Elkhorn River at	Ewing.	Salt Creek subwatershed 12 at Roca.	Salt Creek subwatershed 34 near	Roca,	Salt Creek at Roca	8035.7 Wahoo Creek tributary near	Weston.	North Fork Wahoo Creek near	ook neer Weston	North Fork Wahoo Creek at	Weston.
		Mirrohon	Ia dilib el			6B-7895	7907	7908	1909		7911	7915	i C	7,935	7950	7955		7980		8015	8025		8030	8035.7	0	8036	8037	8039	8040

8041	Silver Creek near Cedar Bluffs	A2	10.9		1894-	op		15.02	4,040		653	6.2
8042	Silver Creek near Colon	A2	29.9	-	1894— 1959	op	 	19.22	12,000		1,320	9.1
8043	Silver Creek tributary near	A2	14.3	 	1894— 1959	op	!	17.32	5,000	1 1 1	261	19.2
8044	Si	A2	22,4	1	1894-	qo	1 1	19.29	4,640	1	351	13.2
8045	Silver Creek at Ithaca	A2	72	! ! ! !	1959 1894— 1959	qp	 	16.92	21,600	 	816	26.5
	Weeping Water Creek basin											
8064	Weeping Water Creek at Elmwood	A2	21.4	67	1950-59		9, 1950	e24.6	7,600	355	2,640	2.9
8064.	8064.4 Stove Creek near Elmwood 8064.4 Stove Creek at Elmwood		4.94 10.0	4.94 10.0	1950—59 1950—59	qo		e23.0	9,500	1,087	2,020	7.7
8064.	Weepin	A2	75.5	75.5	1882— 1959	op	-	e18.5	30,300	401	3,920	7.7
8064.	8064.7 Weeping Water Creek tributary	A2	1.07	1.07	1950-59	May 15	, 1954	18.02	1,160	1,084	416	2.8
8065	near Weeping Water. Weeping Water Creek at Union	A2	238	238	1947–59	May 9	9, 1950	j26.80	60,300	253	4,900	12,3
	Little Nemaha River basin											
8101	Hooper Creek tributary near	A2	7.81	7.81	1950–59	June 1	1, 1951	16.55	3,090	396	1,140	2.7
8102	Hooper Creek near Palmyra		57.5				9, 1950		47,600	828	4,490	10.6
8104	Owl Creek near Syracuse	A2 A2	4.c <i>7</i>	4.67	1950-59	qo		e 16.6	1,280	1,684	465	2°0 8°0
8105	near Syracuse. Little Nemaha River near Syracuse.	A2	218	218	1950–59	op	 		225,000		12,200	18.4
	Nemaha River basin											
8155	Muddy Creek at Verdon	A2	188	188	1953-59	July 10,	, 1958	31,50	31,900	170	9,470	3.4
8230	N N	A7	320	130	1931–59	Apr. 28,	3, 1947	5.92	2,110	16.2	611	က်
8235	ColoNebr. State line. Buffalo Creek near Haigler	A7	180	21	1941–59			4.37	a 140	6.7	38	3.6
8240	Rock Creek at Parks	A7	180	14	1941–59			0 0 0 0 0	95	6.8	4.4	2.2
8360	Blackwood Creek near Culbertson	A7	290	290	1946-59	Jan. 26, June 17,	, 1949 7, 1955	3.92 14.64	1,650	5.7	648	2.5

See footnotes at end of table.

Table 2.—Maximum stages and discharges at gaging stations—Continued

			2 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	e sa sa munacin	e Guidad in			1				
		Flood	Draina	Orainage area		Ma	Maximum s	stage and	discharge		Station	Ratio
N.	20:20	region and	(square	(square miles)	Period of			,	Discharg	a a		maxi-
	Gagille station	hydro- logic area	Total	Contrib-	known floods	<u> </u>	Date	dage height (feet)	Cfs	Cfs per square mile	1100d (Q_2,33 in cfs)	mum to Q_2.33
	Kansas River basin—Continued											
6B-8390	Medicine Creek at Maywood	A6	207	82	1951–59	May	20, 1951	06.64	a2,120	25.9	314	8.9
8392	Elkhorn Canyon near Maywood	A6	6.74	6.74	1952-59		5, 1956		1,220	181	303	4.0
8394	Elkhorn Canyon southwest of Maywood	A6	13.2	13.2	1952–59	do.	1	2.7.2	8,660	929	864	10.0
8395	Brushy Creek near Maywood	A6	130	72	1906-59	June	21, 1947	e30.4	a70,000	972	2,590	27.0
8396	Frazier Creek near Maywood	A6	11.3	11.3	1952-59	July	5, 1956	e,f27.30	11,200	991	972	11.5
8397	Frazier Creek tributary near	A6	.72	.72	1952-59	o	٠, ١	7	483	671	162	3.0
	Maywood.			•				3	1 0		111	1 0
8338	8398, 5Fox Creek north of Curtis	A6	13.8	13.8	1952-59		_		2,080	151	454	4. 0.
8388	Fox Creek above Cut Canyon	A6	8.18	31.8	1951—59	May	20, 1951	23.0	2,810	88.4	594	4.
8399	8399,5Cut Canyon near Curtis	A6	25,6	25.6	1951–59	July	14, 1952		1,560	6.09	551	2.8
8400	;	A6	2.2	7.2	1947-58		1	e27.3	, , , , , , , , , , , , , , , , , , ,		1	1 1 1
		-			1951-58	May	31, 1951					4.3
8405	Dry Creek near Curtis	A6	20	20	1947 - 58		21, 1947	e27.7	m25,900	,300	940	27.6
8415	Mitchell Creek above Harry	A6	53	53	1888-	June	21, 1948	e28	1 1 1	1 1 1 1	1 1 1	1 1 1
	Strunk Lake.											
		,			950-			1	5,230	98.7	983	5.3
8440	Muddy Creek at Arapahoe	A6	243	243				a)	100	10	1 0	1 0
8500	Turkey Creek of Nononee	Α3	138	138	1921-59	Sent	10, 1954 20 1950m	44.04 p 50	1 920	13.0	6.94	. 0
8502	Cottonwood Creek near	A3	15.6	15.6	-56				1,100	70.5	200	2.2
	Bloomington.						•					
8510	Center Creek at Franklin	A3	146	57.4		Sept.	_	e, f	3,150	54.9	278	11,3
8511	West Branch Thompson Creek	A3	27.4	27.4	1953-59	Aug.	15, 1958	13,93	1,290	47.1	398	3.2
	at Hildreth.											
8512	West Branch Thompson Creek	A3	56.6	56,6	1953-59	June	15, 1957	18,35	1,670	29.5	407	4.1
	near Hildreth.					•		1			((
8513	West Branch Thompson Creek	A3	13.9	13.9	1953-59	op	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	18.20	904	65.3	324	8.
8514	West Branch Thompson Creek	A3	8.06	8.06	1953-59	do	1 1	14.89	2,040	22.5	555	3.7
	near Upland.	-		-					•	•	•	

5.5 4.0 1.6	2.2	2.4	1.4	3.2		4.0	1 1 1	2.8		2.1	
2,220 964 104	440	213	888	185		352		629		1,520	
54.7 98.5 12.5	17.4	36.4	14.3	39.1		43.8	1	35.2		38.6	
13.22 12,200 9.45 3,860 12.14 164			1,280	595		a1,400	1 1 1	1,740		3,160	
		16.17	e17.6	13,56		h17.3	 	e16.4		e21.8	
9, 1950 20, 1950 6, 1958	1953—59 July 10, 1958	op	1952-59 July 14, 1952	16, 1957		9, 1950 h17.3	,	1952-59 July 14, 1952		1952-59 June 27, 1952	
July Sept Sept	July	p	July	Aug.		July	-	July		June	
1948-56 July 1948-53 Sept. 1952-59 Sept.	1953–59	1953–59	1952-59	1953-59 Aug.		1950,	1952 - 59	1952-59		1952-59	
223 39.2 13.1	55,1	14.0	89.4	15.2		32.0		49.4		81.9	
223 39.2 13.1	55,1	14.0	89,4	15.2		32.0		49.4		81.9	
A3 A3	A3	A3	A3	A3		A3		A3		A3	
8515 Thompson Creek at Riverton 8520 Elm Creek at Amboy 8807.1School Creek tributary near	Harvard. 8807.2 School Creek near Harvard	8807.3 School Creek tributary 2 near Harvard.	8807.4School Creek near Saronville	8836 South Fork Big Sandy Creek	near Edgar.	8837 South Fork Big Sandy Creek	near Davenport.	8838 South Fork Big Sandy Creek	near Carleton.	South Fork Big Sandy Creek	near Hebron.
8515 8520 8807.1	8807.2	8807.3	8807.4	8836		8837		8838		8839	

^aApproximate.

^b Maximum observed.

cApproximate natural peak.

^gAdjusted for diversion. ^fDatum then in use.

^dRegulated peak; affected by backwater. ^eFrom floodmark.

 $^{\rm h}{\rm From}$ information by local residents. Present site and datum.

^kExceeded by flood of Apr. 24, 1935.

mAt site 2-3/4 miles upstream, from slope-area measurement. "One of the greatest floods known occurred June 22, 1947; stage and discharge unknown.

Table 3.—Unusual peak discharges at miscellaneous sites and at short-term gaging stations with contributing drainage area of 300 square miles or less

ge	ırge	Cfs per square mile		280		651	385	27.5	118	90 70	9	389	604	1,024
stage and discharge	Discharge	Cfs		3,050		2,000	150	09	126	044		2,410	2,840	2,560 1,024
tage and	0000	height (feet)		16.42		18.67	12,11	10,93	12.54		 	1 1 1 1	 	
Maximum s		Date		15, 1953		28, 1953	3, 1959	30, 1958	3, 1959	17 1954	•		2, 1959	2, 1950
Ma		Q		Aug.		July	July	May	July	- Tino		do	Aug.	June
	Period of	known floods		1952–59		3,07 1953-59	.39 1956-59	2,18 1958-59	195659		 	 	 	!
Drainage area	(square miles)	Contrib- uting		10.9		3.07	68.	2,18	1.07	3 9	2	6.2	4.7	2.5
Draina	(squar	Total		10.9		3.07	33	2,18	1.07	8	3	6.2	4.7	2.5
Flood	region and	hydro- logic area		A7		A7	A4	A4	A4	4	Ę	A4	A2	A4
	Tributery to	· · · · · · · · · · · · · · · · · · ·		White River		Cottonwood Creek.	Long Pine Creek.	op	Bone Creek	at Middle Lour	River.	op	Platte River	Elkhorn River
	Stream and place of	determination	White River basin	Deep Creek near Glen, SE4 sec. 32, T. 31 N., R. 53 W.	Niobrara River basin	Pebble Creek near Esther, NW ¹ / ₄ sec. 10, T. 30 N., R. 49 W.	tributary near 1, NW4 sec. 17,	Bone Creek tributary 2 near	Ainsworth, SE ⁴ sec. 8, T. 30 N., R. 21 W. Sand Draw tributary near Ainsworth, NW ⁴ sec. 6, T. 30 N., R. 22 W.	Platte River basin		oup 15 N.,	near Fremont,	i
	Minnhon			6A -4433		4562	4631	4632	4633					

916	133	328	38.8	54.1	76.1	723	245	224	919	8	150	857	286	428	884		3,330	
16,300	5,000	22,000	1,670	4,380	6,700	4,930	2,550	2,800	4,780	9	P45,000	90,000	83,000	2,980	15,200		23,000 3,330	
!	 	 	17.46	16.02	i ; ! !	! ! ! !	12.8	11.99	! ! ! !		23.9		 	12.83	 			
1940	18, 1944	11, 1944	18, 1956	10, 1958	2, 1951	14, 1951	10, 1958	ł ! !	2, 1959	1	1, 1935	21, 1947	21, 1947	19, 1959	9, 1950			
June	May 1	June 1	Aug.	July	June	June	July	-op	Aug.	1	June	June	June	May	July		do.	
1877-			1956-59	1956-59	1909-53	1951, 1958–59	1957–59	1958-59	1909–59	!	~ + ા	1958-59 1874-	1959	1952–59	 		 	
167.0	37.5	67.1	43	81	88	6.82	10.4	12.5	5.2		300	105	290	6.97	17.2		6.9	^b Approximate.
167.0	37.5	67.1	43	81	88	6.82	10.4	12.5	5.2		009	163	358	6.97	17.2		6.9	Appro
A4	A1	A4	A2	A2	A2	A2	A2	A2	A2		A7	A6	A6	A6	A3		A3	
	Logan Creek	Maple Creek	Salt Creek		op		op	op	Cottonwood Creek,		Republican River.	Medicine Creek.	Republican	River. Medicine Creek	West Fork Big	Blue River.		
Union Creek at Madison, sec.	Middle Logan Creek near Laurel, sec. 32, T. 29 N.,	Maple Creek near, sec. 21, T. 20 N.,		8013.2 Olive Branch below Sprague,	Middle Creek at Emerald,	Star sec. 23, 1. 10 N., K. 5 E. Antelope Creek at 48th St., Lincoln, SW4 sec. 32,	T. 10 N., R. 7 E. Antelope Creek at 27th St., Lincoln, SE_4^{\perp} sec. 25, T. 10 N., R. 6 E.	Antelope Creek at Lincoln,	NW4 sec. 24 T.10N, R.6 E. North Fork Cottonwood Creek near Prague between sec. 26 and 35, T.16 N., R. 5E.	Kansas Piver hasin	Red Willow Creek near McCook, NW ¹ / ₄ sec. 6, T. 4 N.,	R. 29 W. Brushy Creek near Maywood,	sec. 34, T. 8 N., R. 29 W. Medicine Creek near Curtis,	sec. 35, T. 8 N., R. 28 W. Fox Creek tributary near	R. 28 W. Unnamed Creek at McCool	Junction, NE‡ sec. 13, T. 9 N R. 3 W.	Unnamed Creek near York, center sec. 6, T. 9 N., R. 2 W.	^a Furnished by Corps of Engineers.
			6B-8012	8013.2		8032	8033	8034			8375			8398				*Furnis

Furnished by Corps of Engineers.

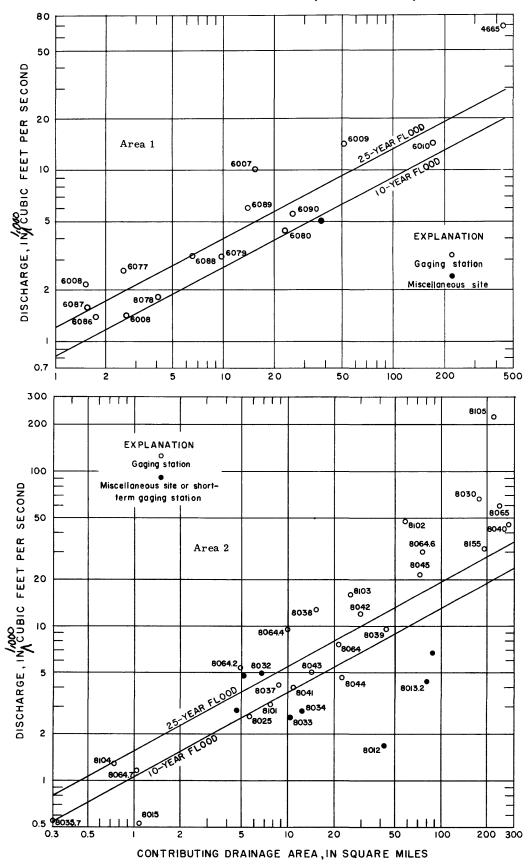


Figure 7.—Relation of maximum discharge to 10 and 25-year floods, region A, areas 1 and 2.

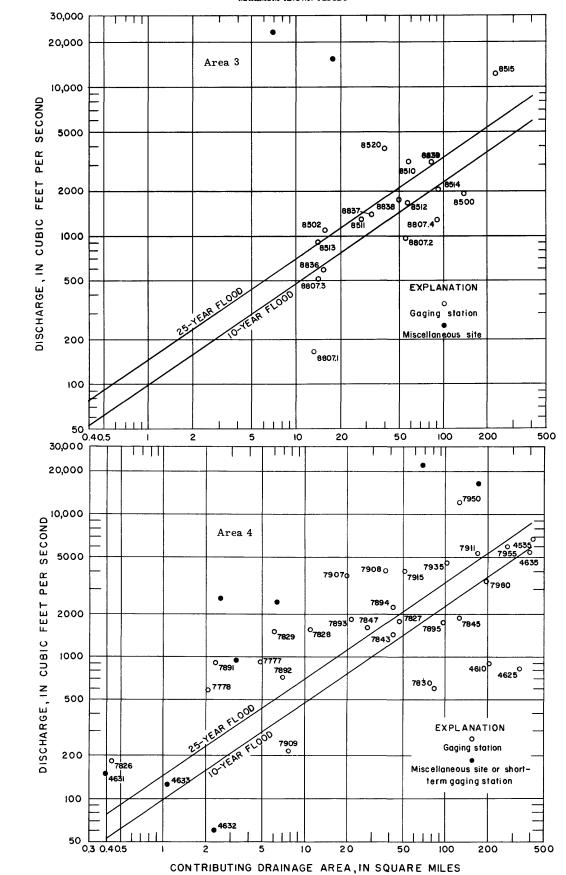


Figure 8.—Relation of maximum discharge to 10 and 25-year floods, region A, areas 3 and 4.

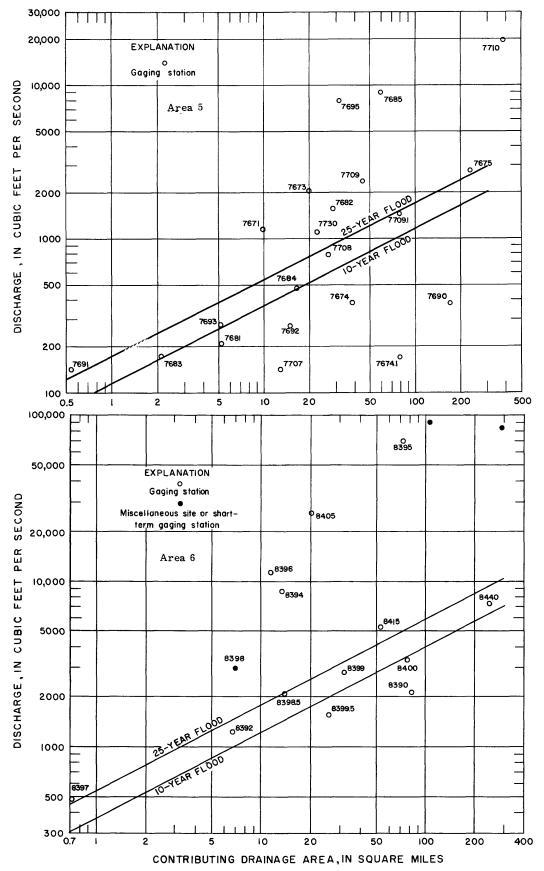


Figure 9.—Relation of maximum discharge to 10 and 25-year floods, region A, areas 5 and 6.


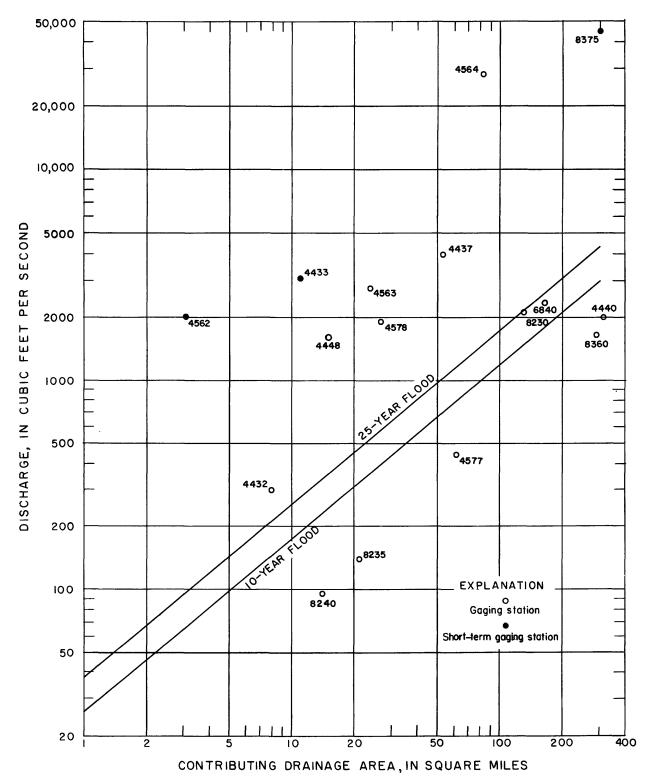



Figure 10.—Relation of maximum discharge to 10 and 25-year floods, region A, area 7.


ET PER SECOND

F

DISCHARGE, IN CUBIC

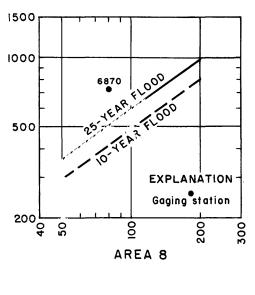



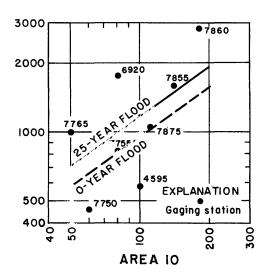

CONTRIBUTING DRAINAGE AREA IN SQUARE MILES

Figure 11.—Relation of maximum discharge to 10 and 25-year floods, region B, areas 8, 9 and 10.

SUMMARY

The accuracy of flood magnitudes for selected recurrence intervals obtained by methods outlined in this report is contingent upon the number of stations used, and the length of each record. When more data are obtained and, perhaps, improved methods of analysis are developed, better definition of the flood regime will be possible.

The curves presented are based on all available annual peak data through the 1959 water year on uncontrolled and unregulated streams having 300 square miles or less contributing drainage area, and 5 or more years' record of annual peaks. The regional frequency curves cannot be extrapolated with confidence beyond 25 years. The drainage area-mean annual flood curves should not be extended beyond the limits shown.

The curves presented in this report should not be used on controlled and regulated streams.

SELECTED REFERENCES

Benson, M. A., 1960, Characteristics of frequency curves based on a theoretical 1,000-year record, in Dalrymple, Tate, Flood-frequency analyses: U.S. Geol. Survey Water-Supply Paper 1543-A, p. 51-74.

Berwick, V. K., 1958, Floods in eastern Montana, magnitude and frequency: U.S. Geol. Survey open-file report.

Bigwood, B. L., and Thomas, M. P., 1955, A flood-flow formula for Connecticut: U.S. Geol. Survey Circ. 365.

Bodhaine, G. L., and Robinson, W. H., 1952, Floods in western Washington, frequency and magnitude in relation to drainage basin characteristics: U.S. Geol. Survey Circ. 191.

Carter, R. W., 1951, Floods in Georgia, frequency and magnitude: U.S. Geol. Survey Circ. 100.

Chow, Ven Te, 1950, Discussion of W.B. Langbein's paper "Annual floods and the partial-duration flood series:" Am. Geophys. Union Trans., v. 30, p. 939-941.

Condra, G. E., 1920, The soil resources of Nebraska: The Nebraska Conservation and Soil Survey, Univ. of Nebraska, Bull. 15, p. 1-76.

Cragwall, J. S., Jr., 1952, Floods in Louisiana, magnitude and frequency: Louisiana Dept. of Highways.

- Cross, W.P., and Webber, E.E., 1959, Floods in Ohio, magnitude and frequency: Ohio Dept. of Natural Resources, Div. of Water Bull. 32.
- Dalrymple, Tate, 1960, Flood-frequency analyses: U.S. Geol. Survey Water-Supply Paper 1543-A.
- Darling, J. M., 1959, Floods in Maryland, magnitude and frequency: U.S. Geol. Survey open-file report.
- Ellis, D. W., and Edelen, G. W., Jr., 1960, Flood frequency, pt. 3 of Kansas streamflow characteristics: Kansas Water Resources Board Tech. Rept. 3.
- Furness, L. W., 1955, Floods in Nebraska, magnitude and frequency: Nebraska Dept. of Roads and Irrigation, p. 2-3.
- Green, A.R., and Hoggatt, R.E., 1960, Floods in Indiana, magnitude and frequency: U.S. Geol. Survey open-file report.
- Gumbel, E. J., 1945, Floods estimated by probability method: Eng. News-Rec., v. 134, no. 24, p. 833-837.
- Jenkins, D. S., and others, 1946, The origin, distribution, and airphoto identification of United States soils: U.S. Dept. of Commerce, Civil Aeronautics Adm., Tech. Devel. Rept. 52, pl. 1.
- Langbein, W. B., 1949, Annual floods and the partial-duration series: Am. Geophys. Union Trans., v. 30, p. 879-881.
- McCabe, J.A., 1958, Floods in Kentucky, magnitude and frequency: U.S. Geol. Survey open-file report.
- McCabe, J. A., and Crosby, O. A., 1959, Floods in North and South Dakota, frequency and magnitude: U.S. Geol. Survey open-file report.
- Mitchell, W. D., 1954, Floods in Illinois, magnitude and frequency: Illinois Div. of Waterways, Dept. of Public Works and Buildings.

- Nebraska State Planning Board, 1941, Water resources of Nebraska: p. 1-19.
- Peirce, L.B., 1954, Magnitude and frequency of floods in Alabama: U.S. Geol. Survey Circ. 342.
- Powell, R. W., 1943, A simple method of estimating flood frequencies: Civil Eng., v. 13, no. 2, p. 105-106.
- Pride, R. W., 1958, Floods in Florida, magnitude and frequency: U.S. Geol. Survey open-file report.
- Prior, C. H., 1949, Magnitude and frequency. of floods in Minnesota: Minnesota Dept. Conserv., Div. of Waters Bull. 1.
- Rantz, S. E., and Riggs, H. C., 1949, Magnitude and frequency of floods in the Columbia River basin, in Floods of May-June 1948 in Columbia River basin: U.S. Geol. Survey Water-Supply Paper 1080.
- Riggs, H. C., 1955, Floods in North Carolina, magnitude and frequency: U.S. Geol. Survey open-file report.
- Schwob, H. H., 1953, Iowa floods, magnitude and frequency: Iowa Highway Research Board Bull, 1.
- Searcy, J.K., 1955, Floods in Missouri, magnitude and frequency: U.S. Geol. Survey Circ. 370.
- Tice, R. H., 1958, Delaware River basin, flood frequency: U.S. Geol. Survey open-file report.
- U.S. Geological Survey, Water Resources Division, 1952, Floods in Youghiogheny and Kiskiminetas River basins, Pennsylvania and Maryland, frequency and magnitude: U.S. Geol. Survey Circ. 204.