University of Nebraska - Lincoln Digital Commons@University of Nebraska - Lincoln

USGS Staff -- Published Research

US Geological Survey

2007

Aquifer-scale controls on the distribution of nitrate and ammonium in ground water near La Pine, Oregon, USA

Stephen R. Hinkle U.S. Geological Survey, srhinkle@usgs.gov

J. K. Böhlke U.S. Geological Survey

John H. Duff U.S. Geological Survey

David S. Morgan U.S. Geological Survey

Rodney J. Weick Oregon Department of Environmental Quality

Follow this and additional works at: http://digitalcommons.unl.edu/usgsstaffpub



Part of the Earth Sciences Commons

Hinkle, Stephen R.; Böhlke, J. K.; Duff, John H.; Morgan, David S.; and Weick, Rodney J., "Aquifer-scale controls on the distribution of nitrate and ammonium in ground water near La Pine, Oregon, USA" (2007). USGS Staff -- Published Research. 422. http://digitalcommons.unl.edu/usgsstaffpub/422

This Article is brought to you for free and open access by the US Geological Survey at Digital Commons@University of Nebraska - Lincoln. It has been accepted for inclusion in USGS Staff -- Published Research by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.



available at www.sciencedirect.com







Aquifer-scale controls on the distribution of nitrate and ammonium in ground water near La Pine, Oregon, USA **

Stephen R. Hinkle a,*, J.K. Böhlke b, John H. Duff c, David S. Morgan a, Rodney J. Weick d

Received 21 December 2005; received in revised form 15 September 2006; accepted 19 September 2006

KEYWORDS

Septic systems; Ground water; Denitrification; Geochemistry; Ammonium ion Summary Geochemical and isotopic tools were applied at aquifer, transect, and subtransect scales to provide a framework for understanding sources, transport, and fate of dissolved inorganic N in a sandy aquifer near La Pine, Oregon. NO_3 is a common contaminant in shallow ground water in this area, whereas high concentrations of NH_4 —N (up to 39 mg/L) are present in deep ground water. N concentrations, N/Cl ratios, tracer-based apparent ground-water ages, N isotope data, and hydraulic gradients indicate that septic tank effluent is the primary source of NO_3 . N isotope data, N/Cl and N/C relations, 3H data, and hydraulic considerations point to a natural, sedimentary organic matter source for the high concentrations of NH_4 , and are inconsistent with an origin as septic tank N. Low recharge rates and flow velocities have largely restricted anthropogenic NO_3 to isolated plumes within several meters of the water table. A variety of geochemical and isotopic data indicate that denitrification also affects NO_3 gradients in the aquifer. Ground water in the La Pine aquifer evolves from oxic to increasingly reduced conditions. Suboxic conditions are achieved after about 15–30 y of transport below the water table. NO_3 is

^a US Geological Survey, 10615 SE Cherry Blossom Drive, Portland, OR 97216, USA


^b US Geological Survey, 431 National Center, 12201 Sunrise Valley Drive, Reston, VA 20192, USA

^c US Geological Survey, 439 McKelvey Building, 345 Middlefield Road, Menlo Park, CA 94025, USA

^d Oregon Department of Environmental Quality, 811 SW Sixth Avenue, Portland, OR 97204, USA

[†] This article is a US Government work and is in the public domain in the USA. Any use of trade, product, or firm names is for descriptive purposes only and does not imply endorsement by the US Government.

Corresponding author. Fax: +1 503 251 3470. E-mail address: srhinkle@usgs.gov (S.R. Hinkle).



denitrified near the oxic/suboxic boundary. Denitrification in the La Pine aquifer is characterized well at the aquifer scale with a redox boundary approach that inherently captures spatial variability in the distribution of electron donors.

© 2006 Elsevier B.V. All rights reserved.

Introduction

Nitrate (NO₃) is the most common contaminant in ground water (Spalding and Exner, 1993). Identification of sources of NO₃, as well as other nitrogen (N) species, has received a tremendous amount of attention, due in part to health concerns regarding NO3 ingestion (World Health Organization, 1996) and to potential ecosystem effects of N loading (Howarth and Marino, 2006). For example, the history and fate of NO₃ contamination have been carefully evaluated in multidisciplinary local transect studies in areas with agricultural sources (e.g. Böhlke and Denver, 1995; Tesoriero et al., 2000; Böhlke et al., 2002; Puckett et al., 2002) and septic tank sources (e.g. Robertson and Cherry, 1992; Wilhelm et al., 1996; Aravena and Robertson, 1998). However, resolution of N sources can be difficult in larger regional studies because of co-occurrence of multiple anthropogenic N sources and uncertainty in N transformation pathways. Furthermore, natural N may be an important but overlooked N source in some aquifers. Thus, identification of natural and anthropogenic N sources, as well as characterization of N geochemistry, remain challenging, particularly in aquifer-scale assessments.

In this paper, we present results of a multiscale study of N occurrence, loading, transport and fate for a sandy aquifer in Oregon, USA, in which the only significant anthropogenic N source (other than atmospheric loading) was septic tank effluent. The near absence of other anthropogenic N sources provided an opportunity to characterize the impact and point-source nature of septic tank N discharge to the aquifer. An important natural N source also was clearly identified and several approaches were used to distinguish between anthropogenic and natural N sources. Multiple lines of evidence point to a denitrification pathway for NO₃ removal from ground water, and a redox boundary approach is proposed for conceptualizing aquifer-scale NO₃ fate.

Study area and background

Rapid rural-residential development on lots as small as one-half acre (0.2 ha) has occurred in the vicinity of La Pine, Oregon, USA (Fig. 1) since the 1960s. A shallow, sandy aquifer serves as both source of drinking water and receptor of septic tank effluent for most residents. Most houses in this semiarid environment are surrounded by semidesert land-scaping, and agricultural activities are almost nonexistent (Oregon Department of Environmental Quality, 1994; Hinkle et al., 2005). Fertilizer use is minimal, and septic tank effluent is the only important anthropogenic source of N to study area ground water (Century West Engineering Corporation, 1982). High concentrations of NO₃—N (>10 mg/L) became widespread in ground water beneath the town of La Pine by the early 1980s (Century West Engineering Corporation, 1982). Sewering of the core urban area of La Pine has re-

duced septic tank effluent loading there. However, most of the surrounding area is unlikely to support centralized sewer or water supply services in the foreseeable future. As of 1999, 5185 rural platted lots had been developed. Another 5010 developable lots remained in 1999. Hence, County and State resource managers are in need of an understanding of NO_3 source, transport and fate in the La Pine area. The work described in this paper arose in response to these needs, but the results have wider applicability.

The La Pine study area lies in Oregon's upper Deschutes Basin (Fig. 1). The area is underlain by as much as 300 m of Quaternary alluvial and lacustrine deposits in a structural basin of Quaternary and Tertiary basalt, andesite, vent deposits, and pyroclastic rocks (Lite and Gannett, 2002). Sand is common in the uppermost 37 m of the aquifer. Deeper sediment is dominantly fine grained, and includes extensive lacustrine deposits. Most ground-water use, and hence our emphasis, is focused in the uppermost 37 m of the aquifer.

Rain and snowmelt are the primary sources of recharge in the study area. Precipitation ranges from 40 to 50 cm/y over most of the area (Taylor, 1993), falling primarily from November through March. Regional ground-water fluxes from higher-elevation areas enter the study area from the west, and to lesser extents the south and east (Gannett et al., 2001). Ground water discharges to the Deschutes and Little Deschutes Rivers. The water table generally lies within 6 m of land surface, facilitating additional ground water loss via evapotranspiration.

Study design and methods

Well networks and other data

Chemical analyses of ground water from a network of 193 existing (primarily domestic) wells, sampled by Oregon Department of Environmental Quality (ODEQ) in June, 2000, provided an aquifer-scale (640 km² area of variable thickness) perspective of the distribution of dissolved oxygen (O₂) (188 sites), NO₃ (192 sites), ammonium (NH₄) (192 sites), and chloride (Cl) (191 sites). This network is referred to as the ODEQ synoptic network. (The raw data are provided as Supplemental data: supplemental_data_1.xls.)

Ground water from a group of 11 existing wells with elevated NH₄–N (>1 mg/L) was sampled by the US Geological Survey (USGS). These wells were primarily a subset of the ODEQ synoptic network. Samples were analyzed for field parameters; nutrients (N and phosphorus [P] species); nonpurgable dissolved organic carbon (DOC); common ions; dissolved nitrogen (N₂), argon (Ar), and methane (CH₄); δ^{15} N in NH₄; and tritium (3 H). These data were used to determine the origin of elevated NH₄ concentrations in ground water. This network is referred to as the ''elevated-NH₄ network''.

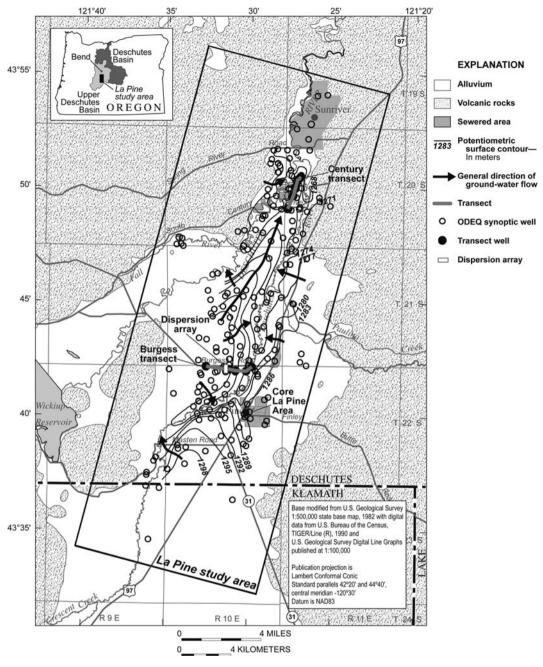


Figure 1 La Pine study area.

The USGS installed monitoring wells along two ground-water flowpaths (Burgess and Century transects, Fig. 1) and sampled the ground water for field parameters; nutrients; DOC; common ions; dissolved N_2 , Ar, CH_4 , and, at selected sites, neon (Ne); $\delta^{15}N$ in NO_3 , NH_4 , and/or N_2 (selected sites); and age-dating tracers (chlorofluorocarbons [CFCs] or 3H ; 3H with 3H e and 4H e for $^3H/^3H$ e age dating at selected sites). These data provided an understanding of the movement and geochemical evolution of ground water at the sub-aquifer scale. One to four wells were installed at each of six locations along transects, with a total of 17 wells along the Burgess transect and eight along the Century transect. Each site (containing one to four wells) was assigned a name, beginning with transect name ("Burgess" or "Century"), followed by a sequential number corre-

sponding to location along the transect, with "1" being furthest upgradient and "6" furthest downgradient. Most sites contained nests of two to four wells; names for these wells included a decimal followed by a digit corresponding to position within the nest ("1" for shallowest).

Transect wells were drilled with a hollow stem auger. Drilling fluids were not used, except at Burgess 2.4, where 68 L of tap water was added to prevent sand surging. Much of this water was immediately removed after placement of casing, and along with subsequent pumping, a total of 727 L was removed — a volume sufficient to ensure that contamination was unlikely. Wells were completed with 5.1-cm-diameter steam-cleaned PVC casing and 0.59-m-length screens. Native sediment usually caved around screens; otherwise, washed quartz sand was added. Well bores were

sealed with bentonite. Well development was done by surging and pumping.

ODEQ installed 33 temporary wells in an array near the Burgess transect (Fig. 1). This dense array, occupying a vertical plane 730 m long and 6.4 m deep, was oriented perpendicular to the Burgess transect at nest 2. These wells were installed by direct push of a 0.61-m-long stainless steel screen. Development of these wells was done with a peristaltic pump. These wells were sampled by ODEQ for NO₃, NH₄, and Cl (32 wells) and O₂ (33 wells) to provide information on solute dispersion normal to the direction of flow. This network of wells is referred to as the dispersion array. (The raw data are provided as Supplemental data: supplemental_data_2.xls.)

ODEQ used direct-push drilling to install one well near the center of each of three plumes of septic tank effluent. Plumes were identified by drilling and sampling from multiple exploratory wells on the downgradient side of septic tank drainfields; plume centers generally were characterized by NO₃—N >10 mg/L. Wells were developed by pumping with a peristaltic pump. The USGS sampled these wells for nutrients, $\delta^{15} N-NO_3$, and Cl. Water from one of these wells, DEQ1227, also was analyzed for DOC, common ions, and field parameters. These data supplemented ODEQ study area septic tank effluent data.

Atmospheric precipitation data were used to characterize potential background chemical fluxes. Precipitation-weighted mean N and Cl concentrations for calendar year 1999 (National Atmospheric Deposition Program, no date) for the Silver Lake Ranger Station (70 km SE of La Pine) were assumed typical of study area precipitation.

Sample collection and analysis

ODEQ samples

ODEQ samples (synoptic network and dispersion array) were collected following stabilization of field parameters. O₂ was measured electrochemically in situ, or by iodometric titration on-site. Samples for Cl were filtered on-site through 0.45-μm nominal-pore-size capsule filters. Samples for NO₃ and NH₄ from the ODEQ synoptic network were filtered in the laboratory (0.45-µm plate filters), whereas those from the dispersion array were filtered on-site through 0.45-µm capsule filters. Samples for NO₃ and NH₄ were preserved on-site with sulfuric acid to pH < 2. Analytical techniques are described by Clesceri et al. (1998). ODEQ analytical techniques were evaluated by the USGS interlaboratory analytical evaluation program. This blind sample program uses natural-matrix standard reference materials. Results are published semiannually (e.g. Farrar and Copen, 2000; Connor et al., 2001).

USGS samples

USGS sample collection and processing protocols are briefly described below. Greater detail is provided in US Geological Survey (1999).

Samples were generally collected after both purging of at least three bore volumes and stabilization of field parameters. O_2 , pH, temperature, and specific conductance were measured electrochemically *in situ*. Alkalinity was measured on-site and in duplicate by titration.

Wells in the elevated-NH₄ network were primarily domestic wells, and had submersible pumps. Where possible, wells were sampled near the well head and upgradient from pressure tanks. If access upgradient from pressure tanks was unavailable, dissolved gases were not collected. Burgess and Century transect wells were sampled with a submersible pump; wetted pump parts were stainless steel and fluorocarbon polymer. Two types of tubing (copper and fluorocarbon polymer) were attached to the pump with a stainless steel union. CFC samples were collected from copper tubing. Other samples were collected from fluorocarbon polymer tubing. Monitoring wells in septic tank effluent plumes were sampled with a peristaltic pump.

Samples for nutrients, common ions, alkalinity, $\delta^{15} N-$ NO₃, and $\delta^{15}N-NH_4$ were filtered through in-line 0.45-µm nominal-pore-size one-time-use capsule filters. Capsule filters were flushed with 1 L of deionized water and then flushed with sample water to remove deionized water prior to use. Cation samples (except NH₄) were preserved with ultrapure nitric acid (pH < 2). Samples for DOC were filtered through 0.45-µm nominal-pore-size silver plate filters. Samples for N_2 , Ar, and CH_4 concentrations and for $\delta^{15}N-N_2$ were collected in a gas-free environment and preserved with potassium hydroxide. CFC samples were collected in flame-sealed borosilicate glass ampules under an atmosphere of purified N2 following protocols of Busenberg and Plummer (1992). Samples for analysis of Ne, 4 He, and δ^{3} He were collected in-line in copper tubes that were crimped while under back-pressure. Samples for analysis of ³H were collected in glass bottles or copper tubes.

Nutrients, common ions, and DOC were analyzed at the USGS National Water Quality Laboratory in Denver, Colorado (Fishman and Friedman, 1989; Patton and Truitt, 1992; Brenton and Arnett, 1993; Fishman, 1993; Patton and Truitt, 2000). Dissolved N₂, Ar, and CH₄ were measured at the USGS Dissolved Gas Laboratory in Reston, Virginia, by gas chromatography (Busenberg et al., 1998). Isotopes of N were analyzed by mass spectrometry at the USGS Reston Stable Isotope Laboratory and are reported relative to N_2 in air (AIR; Coplen, 1993). Methods of freeze drying, combustion and analysis of $\delta^{15}N-NO_3$, and combustion and analysis of $\delta^{15}N-N_2$, were those of Böhlke and Denver (1995), with modification of the combustion reagents according to Böhlke et al. (1993). Methods of NH₄ extraction from water samples, combustion and analysis were those of Böhlke et al. (2006). Analyses of $\delta^{15}N-NO_3$ and $\delta^{15}N-NH_4$ were calibrated by analyzing laboratory solutions with known isotopic compositions, and the data were normalized against international reference materials according to Böhlke and Coplen (1995). Analyses of $\delta^{15}N-N_2$ were calibrated by analyzing air and air-equilibrated laboratory water samples. Samples for CFCs were analyzed in triplicate at the USGS Reston Chlorofluorocarbon Laboratory by purge-and-trap gas chromatography with an electron-capture detector (Busenberg and Plummer, 1992; Busenberg et al., 1998).

Tritium in ground-water samples from the elevated-NH $_4$ network, from Burgess 6.2, and from Century 1.2 and 6.2 were analyzed at the University of Miami Tritium Laboratory. Analysis was by electrolytic enrichment and gas counting (Östlund et al., 1974).

Analysis of Ne, 4 He, and δ^{3} He was done at Lamont-Doherty Earth Observatory of Columbia University (LDEO). Ne

was measured in a quadrupole mass spectrometer. Helium-4 and δ^3 He were measured in a dedicated helium isotope mass spectrometer. Tritium for 3 H/ 3 He age dating also was measured at LDEO, using the 3 He ingrowth method. Analytical methods used at LDEO are described in Plummer and Mullin (1997a,b), and references therein.

Reporting and plotting conventions

Samples analyzed by USGS and ODEQ for NO_3 were analyzed for nitrite-plus-nitrate ($NO_2 + NO_3$). USGS samples analyzed for $NO_2 + NO_3$ were also analyzed for NO_2 , and NO_2 concentrations were consistently negligible. We assume that NO_2 also was negligible in ODEQ-analyzed samples, and thus refer to $NO_2 + NO_3$ as NO_3 .

For plotting purposes, USGS NO_3 and ODEQ NO_3 and Cl concentrations below the minimum reporting level (MRL) were plotted at one-half of the MRL. The USGS and ODEQ MRL for NO_3 —N was 0.005 mg/L, and for ODEQ Cl, 0.5 mg/L.

Results and discussion

Aquifer scale distribution of NO₃ and NH₄

An aquifer-scale understanding of N distribution was provided by the ODEQ synoptic network. Ground-water samples containing >1 mg/L NO₃—N represented 22% of the sites, although samples from only two sites (1% of the sites) exceeded the US Environmental Protection Agency (USEPA) Maximum Contaminant Level of 10 mg/L NO₃—N. NO₃ currently occurs primarily near the water table. Well construction data were available for 89% of ODEQ synoptic network wells; of this group, ground water that contained >1 mg/L NO₃—N came from shallow wells in which the tops of the open intervals had median and maximum depths below water table of 3.3 m and 8.1 m, respectively.

Elevated concentrations of NH₄-N (>1 mg/L) were observed in 17% of the ground-water samples from the ODEQ synoptic network, and concentrations as high as 39 mg/L NH₄-N were documented. Well construction data were available for 171 of the 192 sites sampled for NH₄. Of these 171 sites, 30 yielded ground water with >1 mg/L NH_4-N . The 30 sites with elevated concentrations of NH₄ generally were deep or in the near-river environment, and the deeper samples among these tended to contain higher concentrations of NH₄ than did the shallower samples. Of the 30 sites with elevated concentrations of NH₄, 17 were wells in which the depth of the top of the open interval below the water table was >37 m (median NH₄-N 8.2 mg/L), and of the 13 shallow sites (median NH₄-N 3.2 mg/L), 10 were located within 600 m of rivers. Thus, in contrast to the distribution of NO₃ concentrations, NH₄ concentrations exceeding 1 mg/ L NH₄-N generally were detected in deep ground water or in shallow ground water near rivers, the latter possibly representing deep ground water moving towards rivers, which serve as drains for regional ground water.

Ground-water age and temporal aspects of NO_3 and NH_4 occurrence

Age-dating techniques were used to estimate ground-water travel times along flowpaths. Age-dating information allowed

us to determine whether ground water containing elevated concentrations of NO_3 and NH_4 was of recent origin (thus possibly related to anthropogenic activities), or if the ground water predated anthropogenic influences in the study area (thus implicating natural sources of NO_3 or NH_4). Physical, chemical and isotopic data from transects (Table 1) also helped define the distribution of NO_3 and NH_4 in the context of space and time.

Estimated recharge temperatures are needed for calculating apparent ground-water ages from CFC or ³H/³He data. Recharge temperature often is close to the mean annual air temperature (Andrews, 1992) or the mean annual soil temperature at the water table (about 1 °C greater than the mean annual air temperature; Stute and Schlosser, 2000). The mean annual air temperature in the study area is 7.2 °C (mean of mean annual air temperatures at the Wickiup Reservoir and Bend climate stations; Fig. 1) (National Climatic Data Center, 2005a,b). However, Ne and Ar concentrations plot along an excess air curve indicating a median recharge temperature of 5.2 °C (Fig. 2). Most study area recharge enters sediment between late fall and early spring as direct infiltration of precipitation and snowmelt. Much of this recharge occurs in a pulse during spring snowmelt and possibly takes little time to travel through the thin unsaturated zone. The difference between the mean annual air temperature (7.2 °C) and the recharge temperature estimated from Ne and Ar concentrations (5.2 °C) may reflect recharge primarily during colder months. Thus, a recharge temperature of 5.2 °C was used in calculations. A 2.0 °C increase in assumed recharge temperature would result in a median difference of 1 y in the CFC apparent ages calculated below and less than 0.1 y in the ³H/³He apparent ages.

All transect wells except Burgess 6.2, Century 1.2, and Century 6.2 were sampled for CFC-12, CFC-11, and CFC-113. A CFC-based apparent age represents the time of travel for water particles from their points of recharge at the water table to a well (Busenberg and Plummer, 1992; Cook and Solomon, 1997; Plummer and Busenberg, 2000). In general, CFC-12 concentrations provide the most reliable CFC apparent ages because CFC-12 does not tend to sorb and is resistant to microbial degradation until methanogenic conditions become well established, whereas CFC-11 and CFC-113 are more susceptible to microbial degradation and may sorb to organic carbon (Plummer and Busenberg, 2000). Thus, we generally used the median CFC-12 apparent age at most sites. However, samples from three sites (Century 1.1, Century 4, and Century 5) contained CFC-12 concentrations that were greater than could be accounted for by simple air—water solubility and that were highly variable among sequential samples (Table 2), thus indicating the presence of CFC-12 contamination. In instances where CFC-12 contamination was indicated, CFC-11 and CFC-113 apparent ages were evaluated. If the CFC-11 and CFC-113 apparent ages were similar (within 4 y, i.e. Century 1.1 and Century 4), the median of the six CFC-11 and CFC-113 apparent ages was used. On the other hand, if the CFC-12 concentrations indicated the presence of contamination, and the CFC-11 and CFC-113 apparent ages were not similar, the CFC-11 and CFC-113 may have been degraded, and the water was considered undatable by CFCs; this was the case for Century 5. Finally, the highly reducing conditions at Burgess 6.1 (1.07 mg/L CH₄, 12.3 mg/L iron [Fe], and no

Name	Sample date	Depth to top of open interval (m)	Depth to bottom of open interval (m)	Depth to water (m)	0 ₂ (mg/L)	五	NO ₂ + NO ₃ (mg N/L)	NH ⁺ (mg N/L)	Kjeldahl nitrogen (mg N/L)	NO ₂ (mg N/L)	P (mg/L)
Burgess 1.1	10/14/99	9.41	10.01	7.94	10.7	7.1	1.3	<0.02	<0.1	<0.01	0.12
Burgess 1.2	10/18/99	13.83	14.42	7.90	9.3	7.7	0.045	<0.02	E0.06	<0.01	0.16
Burgess 2.1	10/18/99	5.91	6.52	4.03	7.5	6.9	4.1	<0.02	E0.07	<0.01	0.25
Burgess 2.2	10/18/99	8.01	8.62	4.00	2.4	7.1	1.1	0.02	E0.07	0.01	0.20
Burgess 2.3	10/15/99	9.94	10.55	3.98	0.2	7.4	<0.005	0.02	<0.1	<0.01	0.34
Burgess 2.4	10/15/99	14.53	15.12	3.95	0.3	7.5	<0.005	<0.02	E0.05	<0.01	0.25
Burgess 3.1	10/16/99	5.74	6.33	2.74	3.9	7.0	1.5	<0.02	E0.09	<0.01	0.23
Burgess 3.2	10/16/99	7.72	8.31	2.72	5.1	7.2	1.2	<0.02	E0.07	<0.01	0.25
Burgess 3.3	10/16/99	10.64	11.23	2.58	0.2	7.3	<0.005	0.05	E0.08	<0.01	0.14
Burgess 4.1	10/17/99	6.50	7.09	3.67	4.0	7.1	0.031	<0.02	E0.07	<0.01	0.23
Burgess 4.2	10/17/99	9.02	9.61	3.58	0.2	7.1	0.013	0.03	0.1	<0.01	0.17
Burgess 4.3	10/17/99	13.90	14.50	3.52	0.3	7.4	<0.005	80.0	0.1	0.01	0.24
Burgess 5.1	10/19/99	5.71	6.31	4.07	0.7	7.1	<0.005	<0.02	E0.06	<0.01	0.17
Burgess 5.2	10/19/99	69.6	10.29	4.09	0.7	7.5	<0.005	0.08	0.1	<0.01	0.21
Burgess 5.3	10/19/99	13.84	14.43	3.79	0.3	8.2	<0.005	0.30	0.3	<0.01	0.50
Burgess 6.1	7/11/00	3.38	3.97	1.98	0.2	7.1	<0.005	0.08	0.2	<0.01	0.35
Burgess 6.2	7/11/00	12.14	12.73	1.97	<0.1	7.6	<0.005	4.5	5.0	<0.01	1.1
Century 1.1	7/14/00	2.65	3.23	1.85	1.4	8.9	3.6	<0.02	E0.09	0.03	0.05
Century 1.2	7/14/00	19.23	19.81	1.85	0.1	7.5	<0.005	5.5	6.2	<0.01	2.1
Century 2	7/12/00	2.29	2.86	1.05	<0.1	7.1	0.80	0.03	E0.1	0.01	0.04
Century 3	7/13/00	1.62	2.19	1.15	0.2	7.5	0.00	0.03	0.1	<0.01	80.0
	7/12/00	2.16	2.77	1.72	1.9	6.8	6.7	0.08	0.3	<0.01	90.0
Century 5	7/14/00	2.4/	3.05	1.62	0.7	6.9	5.6	0.08	0.2	<0.01 0.03	0.04
Century 6.1	7/13/00	47.03	10 50	2/.ا عد د	5. c	0.0	1.4	۰۵.02 م ع	2.7	0.0	0.0
Century 6.2	//13/00	76./1	18.50	97.7	7.0	Γ.	<0.00>	7.3	/:7	-0.U ₁	0.90
DEQ191	00/9/9	59	62	5.16	<0.1	7.0	<0.005	21	23	0.02	2.2
DEQ197	00/9/9	101	102	7.03	<0.1	7.6	<0.005	38	43	<0.01	9.1
DEQ204	00/9/9	86	86	3.01	0.2	7.7	<0.005	12	15	<0.01	2.2
DEQ142	00/2/9	7 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	1 4	15.45	<0.1	7.6	<0.005 0.005	15	16	<0.01 0.01	2.3
DEQ340	00/1/9	× č	= 5	2.9/2	0.1	6.7	0.073	4. c	4. c	, 0.01	0.96
DEQ.108	0/8/00	<u> </u>	2 (7.70	0.1	7.0	<0.005	- o	۶.۲ د د	\$0.01 0.03	1.7
DEQ284	00/8/00	- -	£ £	2.38	- 6	0 / 1	\$0.000 0.000	۰. ر. د	9.0	0.0	7.7
DEQ.180	00/0/0	- 1	2 2	0.70	5. 6		00.00		- c	0.0	· ·
DEQ216	00/0/	77	S &	7.77	. 6	7.0	,000 000 000 000	. · ·	3.5	0.0	7
DEQ214	6/9/00	٥ ۾ م	9 2	5.00 42		0.0	, , , , , , ,	6.7	75	0.0	2.1
VEQ.140	00.11	\$	071		0/	7.7	00.00	75	3	0.0	1.7
Plume 1	5/15/00	4.45	5.30	3.48	8.3	6.7	26	0.09	9.4	<0.01	0.10
Plume 2	11/30/00	1.19	3.05	2.10			38	<0.04	0.2	0.01	0.02
(DEQ2046) Plume 3	5/14/01	2.44	3.05	2.13			49	<0.0 ⁴	0.3	E0.003	0.08
(DEQ2091)										(opper type as boundary)	(00004
										na pariinina)	near page)

Name	 U	50_4^{2-}	HCO ₃	Fe (µg/L)	Mn (μg/L)	DOC (mg/L)	CH ₄ (mg/L)	N_2 (mg/L)	Ar (mg/L)	Ne .	δ ¹⁵ N-NH ₄	Su-Nc16	$\delta^{15}N-N_2$
		$(mg 50_4^{-}/L)$	$(mg\ HCO_3^-/L)$							(µg/kg)	(%) (AIR)	(%) (AIR)	(%) (AIR
Burgess 1.1	2.7	3.9	59.5	17	E1	1.3	0.00	20.7	0.712			4.0	
Burgess 1.2	0.97	<0.3	61.0	18	E2	1.2	0.00	19.4	0.688				0.54
Burgess 2.1	3.0	3.3	41.4	350	9	8.0	0.00	18.2	0.658			6.2	0.51
Burgess 2.2	3.2	3.1	58.3	310	43	1.1	0.00	19.3	0.681			8.7	89.0
Burgess 2.3	1.2	1.4	55.1	510	12	1.3	0.13	19.3	0.684				
Burgess 2.4	1.	0.5	54.9	1300	80	9.0	0.21	19.2	0.682				
Burgess 3.1	1.5	3.1	56.1	22	4	0.7	0.00	17.9	0.644			3.3	0.42
Burgess 3.2	2.4	2.6	40.3	65	4	0.8	0.00	18.4	0.660			5.7	09.0
Burgess 3.3	1.8	4.1	52.6	750	6/	0.7	0.01	19.8	0.681				0.77
Burgess 4.1	2.9	9.3	78.1	24	<2	2.1	0.00	20.5	0.678				
Burgess 4.2	3.8	13	82.1	800	100	2.1	0.00	21.0	0.669				1.49
Burgess 4.3	4.2	7.0	57.3	1300	130	1.2	0.07	21.0	0.684				1.03
Burgess 5.1	1.3	1.6	56.1	E2	m	1.9	0.00	19.9	0.705				0.51
Burgess 5.2	1.1	5.4	70.2	230	120	1.6	0.01	20.6	0.705				0.91
Burgess 5.3	0.95	2.9	72.3	150	78	1.2	0.23	19.6	969.0	0.197			
Burgess 6.1	0.78	<0.3	83.4	12,300	250	2.8	1.07	18.1	0.670	0.179			
Burgess 6.2	1.3	<0.3	159	4600	360	3.6					2.6		
Century 1.1	8.1	2.1	56.7	8	98	2.2	0.00	19.4	0.693	0.190		7.1	0.34
Century 1.2	2.0	2.0	204	220	87	6.1					2.5		
Century 2	13	5.7	122	91	130	3.0	0.00	22.5	0.723	0.192		11.5	1.20
Century 3	6.5	5.1	158	42	170	4.3	0.00	21.1	0.703	0.208			1.34
Century 4	7.4	0.6	116	12	260	2.3	0.00	20.5	0.712			9.5	0.31
Century 5	1	5.9	121	7	260	1.7	0.00	21.1	0.720			12.8	69.0
Century 6.1	7.5	3.5	122	E7	9	2.5	0.01	18.8	0.670	0.189		6.4	0.45
Century 6.2	3.0	9.0	104	950	390	2.2					3.8		
DEQ191	3.1	<0.3	410	10,600	360	6.2	0.06	11.4	0.431		3.2		
DEQ197	2.0	<0.3	858	5300	110	18	114	8.9	0.286		3.6		
DEQ204	3.2	1.6	293	1600	200	3.0	65.2	17.2	0.595		3.9		
DEQ142	2.2	2.2	227	1600	66	5.9	44.9	15.9	0.552		2.7		
DEQ540	1.6	1.0	102	370	26	1.5					3.2		
DEQ108	1.8	1.4	450	2700	160	6.6	82.5	14.2	0.508		3.3		
DEQ284	0.58	1.9	86.9	790	46	1.2					2.6		
DEQ186	2.0	3.1	295	410	330	8.0					3.2		
DEQ216	1.3	E0.2	112	3000	260	3.3	25.8	20.9	0.713		3.4		
DEQ214	2.1	0.8	152	890	240	1.3	23.7	16.9	0.610		3.9		
DEQ146	2.3	<0.3	752	2600	180	12	85.5	6.1	0.250		3.7		
Plume 1	32	19	103	52	87	2.2						8.3	
(DEQ1227)													
Plume 2	110											7.0	
(DEQ2040)	7												
												27	

These data are a subset of the complete analytical suite. The complete list of geochemical and isotopic data, along with location information, can be found in Supplemental data: supplemental_data_3.xls. "E" indicates estimated.

a Depth to water measured 6/6/00; no measurement with sample.

b Depth to water measured by driller 10/21/66; no measurement with sample.

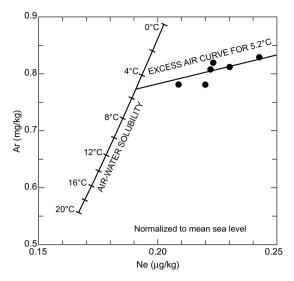


Figure 2 Ne and Ar concentrations in ground water (transect sites at which Ne was measured), with air—water solubility curve (Weiss, 1970, 1971) and excess air trend for water recharged at 5.2 °C. Data normalized to mean sea level (US Committee on Extension to the Standard Atmosphere, 1976) to remove variability associated with variable recharge elevations, where recharge elevation for a given sample was assumed to be the water table elevation at the sampling site.

detectable sulfate [SO₄]) could have led to microbial degradation of CFCs, and the CFC apparent age for this site was considered the maximum likely tracer-based apparent age. CFC apparent ages are presented in Table 2.

A subset of transect wells was sampled for ³H/³He ground-water dating (e.g. Schlosser et al., 1989; Cook and Solomon, 1997; Solomon and Cook, 2000). Calculated ³H/³He apparent ages are given in Table 2. Diffusive ³He loss can occur in ground water with vertical flow velocities of less than about 0.25–0.50 m/y, leading to a young bias in ³H/³He apparent ages (Schlosser et al., 1989). Low recharge rates in the study area (discussed below) likely result in low vertical flow velocities and may cause a young bias in ³H/³He apparent ages. Thus, ³H/³He apparent ages are interpreted as minimum ages. Although ³H/³He apparent ages are qualified (presented as minimum apparent ages), they are consistent with the CFC apparent ages, and thus provide support for the reliability of the CFC dating method.

Ground water from three deep transect sites (Burgess 6.2, Century 1.2, and Century 6.2) was dated only with ^3H . In all three cases, ^3H concentrations were $\leqslant\!0.2$ TU (Table 2), clearly indicating pre-bomb (pre-1953) recharge. This apparent age of >47 y represents travel time through both the (thin) unsaturated zone and saturated zone.

Burgess transect hydrochronology (as well as O_2 , NO_3 , and Cl distributions) are shown in Fig. 3. There is good agreement between tracer-based apparent ground-water ages and position along the transect — ground-water apparent age increases with depth and in the downgradient direction. The relatively small apparent age (<34 y) at Burgess 6.1 (shallow well located adjacent to the Little Deschutes River) may reflect mixing of river and ground water.

In some types of simple aquifers, recharge rates may be estimated from individual tracer-based apparent ground-

water ages by using the following equation (Vogel, 1967; Cook and Böhlke, 2000):

$$R = (H\varepsilon/T)\ln(H/(H-z)) \tag{1}$$

where R is the recharge rate, H the aguifer thickness, ε the porosity, T the time of travel, and z the depth below the water table. Eq. (1) holds for homogeneous, unconfined aguifers of constant thickness receiving uniform recharge. Eq. (1) was applied to the Burgess transect. (Shallow wells along the Century transect tap a 1- to 2-m sand layer underlain by about 10-20 m of clay; the 0.6-m screened intervals were sufficiently long relative to the sand layer thickness that the Century transect wells were not amenable to use in Eq. (1).) Sites with censored CFC apparent ages (associated with a "'>" or "'<") were not used. Assuming an aquifer thickness of 15 m (typical saturated thickness of sands overlying fine-grained materials along the Burgess transect) and a porosity of 0.3, Eq. (1) yields a median recharge rate of 5.4 cm/y, or about 12% of average annual precipitation. This recharge estimate is somewhat greater than the 3.6-3.8 cm/y estimated for the Burgess transect area by regional application of a water balance model (Bauer and Vaccaro, 1987) to the upper Deschutes Basin (Boyd, 1996; Gannett et al., 2001), but comparable to the 5.1-5.4 cm/y that provided the optimal fit during calibration of the aquifer-scale model accompanying the current study (Morgan et al., 2002). Note that a recharge rate of 5.4 cm/y and a porosity of 0.3 equates to vertical velocity near the water table of 0.18 m/y - sufficiently slow that incomplete ³He confinement is possible, as described above.

The hydrochronology of ground water along the Century transect is consistent with the expectation that deeper ground water should generally be older than shallower ground water. The deep wells (Century 1.2 and 6.2, screened more than 15 m below the water table) contained pre-bomb water. The remaining wells were screened within 2 m of the water table, and yielded water with tracer-based apparent ground water ages of 9-23 y. Tracer-based apparent ages in the shallow Century transect wells do not vary in any obvious systematic manner along the transect. These shallow wells were installed along a narrow ridge in the potentiometric surface (Fig. 1), and ground water probably is shed laterally from this ridge with the result that shallow ground water collected along the length of the Century transect probably represents a collection of samples of locally recharged ground water and not a chronologic sequence of ground water.

Patterns of NO_3 and NH_4 distribution along the Burgess and Century transects (Fig. 3 and Table 1) are similar to those observed in the ODEQ synoptic network — NO_3 is found at shallow depth, whereas NH_4 is found in deeper ground water, or in downgradient ground water where regional ground water discharges towards rivers. NO_3 is found only in younger water that may have been affected by recent anthropogenic inputs, whereas NH_4 occurs primarily in older water that predates most anthropogenic activities in the area (Fig. 4).

Sources of NO₃ and NH₄

ODEQ synoptic network NO_3 and Cl data, along with potential endmember sources of N and Cl (atmospheric precipitation

wells
etwork
nium-ne
d-ammo
elevated
ansect and ele
n transe
ter fror
ound wa
s for gre
ent ages for
d appar
Tracer-based
Table 2

200	יומרכן במסכם משלאם כיור מפרש וכו פוסמוום אמרכן ווסוון רומווזכר													
Site	Sample date	CFC conce	entration in so	CFC concentration in solution (pg/kg)	CFC appare	CFC apparent recharge year ^a	/ear ^a	³н (ти) ^ь	δ^3 He (%)	⁴He ^c	Apparent age (y)	age (y)	Selected apparent age (y)	t age (y)
		CFC-11	CFC-12	CFC-113	CFC-11	CFC-12	CFC-113 ^d				CFC 3	³ H, ³ Hе		ļ
Burgess 1.1	10/14/99	722.0	340.1	327.9	1985.5	1989.0	C				11		11	
Burgess 1.2	10/18/99	279.7	125.6	41.9	1972.5	1972.5	1982.0				27		27	
Burgess 2.1	10/18/99	570.2	268.1	146.7	1980.5	1984.0	U				16		16	
Burgess 2.2	10/18/99	133.7	84.3	42.3	1967.5	1969.0	1982.0				31		31	
Burgess 2.3	10/15/99	1.9	2.7	59.0	1950.0	1947.5	1984.5				52		52	
Burgess 2.4	10/15/99	0.9	2.1	110.7	1948.5	1946.5	1990.5				53		53	
Burgess 3.1	10/16/99	441.9	222.7	81.4	1976.5	1980.0	1987.0				70		20	
Burgess 3.2	10/16/99	357.3	161.0	49.9	1974.5	1975.0	1983.5				25		25	
Burgess 3.3	10/16/99	1.1	16.4	31.7	1949.0	1957.0	1979.5				43		43	
Burgess 4.1	10/17/99	7.66	168.5	49.4	1965.5	1975.5	1983.0				24		24	
Burgess 4.2	10/17/99	36.9	157.7	60.5	1960.5	1974.5	1985.0				25		25	
Burgess 4.3	10/17/99	0.0	32.0	33.6	<1945.0	1962.0	1980.0				38		38	
Burgess 5.1	10/19/99	80.9	64.3	253.5	1964.5	1967.0	U				33		33	
Burgess 5.2	10/19/99	1.3	8.1	25.4	1949.0	1952.0	1978.0				48		48	
Burgess 5.3	10/19/99	1.0	0.0	91.9	1948.5	<1940.0	1988.0	<0.05	4.20	4.86	^60	>62	>62	
Burgess 6.1	7/11/00	0.0	63.6	0.0	<1945	1967.0	<1955.0	4.81	-0.33	4.35	\$ 4	<u>×</u>	1 < X < 34	
Burgess 6.2	7/11/00							0.2			^	>47	×47	
Century 1.1	7/14/00	743.3	350.8	93.2	1986.0	1990.0	1988.5	3.08	3.69	4.73	4	/<	4	
	7/14/00	745.7	418.3	89.0	1986.5	U	1988.0							
	7/14/00	754.7	399.4	99.1	1986.5	U	1989.0							
Century 1.2	7/14/00							0.1			^	>47	×47	
Century 2	7/12/00	87.0	196.9	0.0	1965.0	1978.0	<1955.0				23		23	
Century 3	7/13/00	12.7	259.5	0.0	1955.0	1983.0	<1955.0	3.34	5.10	4.78	81	× ×	18	
Century 4	7/12/00	682.6	321.4	82.2	1984.5	1987.5	1987.0	3.14	0.67	5.23	4	<u>د</u> ^	4	
	7/12/00	622.9	398.6	84.5	1983.5	U	1987.5							
	7/12/00	651.4	482.5	78.3	1983.5	U	1987.0							
Century 5	7/14/00	637.8	470.6	82.9	1983.0	U	1987.5				<u></u>			
	7/14/00	601.8	361.2	98.4	1982.0	1991.5	1989.0							
	7/14/00	591.1	420.8	6.66	1981.5	U	1989.0							
Century 6.1	7/13/00	744.8	361.7	86.4	1986.0	1991.5	1987.5	3.62	1.90	4.98	6	, 4	6	
Century 6.2	7/13/00							<0.1			Α	>47	×47	
DEQ191	00/9/9							<0.1			^	>47	>47	
DEQ197	00/9/9							<0.1			A	>47	>47	
DEQ204	00/9/9							<0.1			A	>47	>47	
DEQ142	00/2/9							0.1			,	>47	>47	
DEQ540	00/2/9							4.4			•	<47	<47	
DEQ108	00/8/9							<0.1			^	>47	>47	
DEQ284	00/8/9							<0.1			^	>47	>47	
DEQ186	00/8/9							2.9			•	<47	<47	
DEQ216	00/8/9							¢0.1			^	>47	^47	
DEQ214	00/6/9							<0.1			^	>47	^47	
DEQ146	7/11/00							<0.1			^	>47	>47	
C.L.	1 F II	11.00	L	- 010	٠									

CFC samples collected and analyzed in triplicate. For most sites, CFC-based apparent age was based upon median CFC-12 apparent age, and that one sample is listed. Some samples at each of three sites — Century 1.1, 4, and 5 — contained CFC-12 concentrations greater than could be accounted for by simple air—water solubility; for these sites, all three samples are listed and interpretation is discussed in text.

^a "C" indicates contamination – concentration exceeds that expected for water in contact with uncontaminated atmosphere for any date prior to sampling date.

^b Tritium by electrolytic enrichment and gas counting given to tenths; by helium ingrowth, to hundredths.

^c Units of cm³ STP/1.0 × 10⁸ g H₂O.

d The CFC-113 apparent ages for Burgess nests 1-5, which were drilled in 1999, are consistently younger than CFC-11 and CFC-12 apparent ages, or are at contaminant levels, whereas CFC-113 apparent ages for other transect sites, which were drilled in 2000, are reasonable. It is possible that well casing used in 1999 was contaminated with CFC-113.

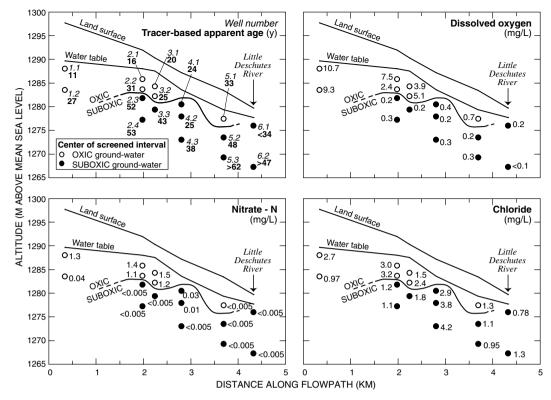


Figure 3 Tracer-based apparent ground-water ages, and O_2 , NO_3 , and Cl concentrations, along Burgess transect. Ground water moves down and towards the right, and discharges to the Little Deschutes River.

data and typical septic tank effluent values), are shown in Fig. 5. Atmospheric precipitation N and septic tank effluent N are shown in Fig. 5 as equivalent NO₃; that is, atmospheric NH₄ was combined with atmospheric NO₃ and plotted as equivalent NO3, and septic tank N was plotted assuming all reduced N was oxidized to NO₃. Median N and Cl concentrations from study area septic tank effluent (55 N, 32 Cl samples; Rich, 2001) are plotted as a point in Fig. 5. Other data on typical septic tank effluent from the literature (US Environmental Protection Agency, 1978; Oregon Department of Environmental Quality, 1982; Alhajjar et al., 1989; Bushman, 1996; Bunnell et al., 1999; Bates, 2000) are included in the error bars in Fig. 5, which represent the ranges of medians (means if medians not provided) from these literature sources. The wider range in these literature values for Cl compared to N may reflect variations in Cl concentrations due to presence or absence of water softeners, and variations in Cl concentrations in sources of domestic water resulting from, for example, factors such as proximity to coastal environments, local use of road salt, or variations in evapotranspiration.

Concentrations of both N and Cl are higher in septic tank effluent than in ODEQ synoptic network ground-water NO_3 and Cl samples (Fig. 5). Septic tank effluent is likely the primary source of elevated Cl in La Pine ground water. Evaporites do not occur in the volcanic rocks and sediment of the study area, and agricultural sources of Cl are not important (''Study area and background'' section). Sodium chloride is not used on roads, and although compounds containing magnesium chloride are occasionally used, their use is limited

and spatially restricted in the study area (Hinkle et al., 2005). For these reasons, and because Cl is nonreactive. Cl is a useful tracer of septic tank effluent in the La Pine area. Most of the ODEQ synoptic network data plot near a mixing line in Fig. 5 between the region representing precipitation (allowing for varying degrees of evapotranspiration and vegetative nutrient uptake) and a region of N- and Clrich septic tank effluent. Low-O₂ samples plotting primarily below the mixing region will be discussed in the next section. Thus, NO₃/Cl relations in Fig. 5 are consistent with a septic tank effluent source of elevated NO₃ concentrations. In addition, the observation that ODEQ synoptic network detections of $NO_3 > 1 \text{ mg/L } NO_3 - N$ occur near the water table is consistent with, although not uniquely indicative of, septic tank effluent being the dominant anthropogenic source of NO₃ in the study area.

Geochemical data along the Burgess and Century transects also point to a septic tank effluent source of NO $_3$ (and Cl) to study area ground water (Fig. 3, and Tables 1 and 2). In general, concentrations of NO $_3$ and Cl are greater in ground water with apparent ages <40 y (NO $_3-N$ up to 6.7 mg/L, Cl up to 13 mg/L) than in ground water with apparent ages >40 y (NO $_3-N$ <0.01 mg/L, Cl $\leqslant 3.0$ mg/L). These data indicate relatively recent loading of both NO $_3$ and Cl, consistent with the history of home construction along the transects.

Ground-water NO_3 concentrations from the dispersion array, a dense network of wells in a 730×6.4 m plane oriented perpendicular to the Burgess transect, are shown in Fig. 6. NO_3 and Cl (data not shown) are correlated

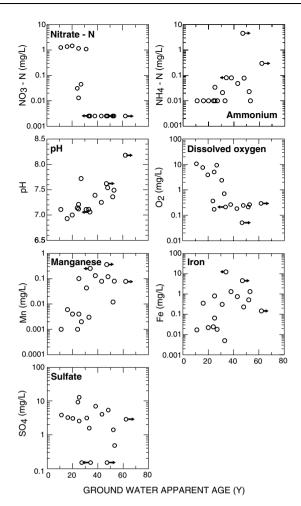


Figure 4 NO_3 , NH_4 , pH, O_2 , Mn, Fe, and SO_4 concentrations along Burgess Transect, as function of tracer-based apparent ground-water age. Arrows indicate censored apparent ages, where a right arrow indicates that apparent age is greater than plotted age, and a left arrow indicates that apparent age is less than plotted age. Concentrations below detection limit plotted at half the detection limit.

 $(r^2=0.77,\ p<0.0001).\ NH_4-N\ concentrations\ (data\ not\ shown)\ for\ the\ 32\ sites\ were\ low,\ with\ a\ median\ of\ 0.02\ mg/L\ and\ a\ maximum\ of\ 0.07\ mg/L\ NO_3\ occurs\ in\ discrete\ plumes,\ each\ of\ which\ could\ represent\ a\ plume\ from\ an\ individual\ septic\ tank\ drainfield,\ or\ the\ coalescing\ of\ plumes\ from\ several\ distinct\ drainfields.\ The\ heterogeneous\ distribution\ of\ NO_3\ concentrations\ is\ consistent\ with\ a\ number\ of\ point\ sources\ of\ septic-tank-derived\ NO_3,\ rather\ than\ a\ uniform\ nonpoint\ source\ such\ as\ from\ agricultural\ sources,\ and\ provides\ additional\ support\ for\ a\ septic-tank\ source\ of\ NO_3\ in\ the\ study\ area.\ The\ occurrence\ of\ low\ to\ modest\ NO_3\ concentrations\ along\ the\ Burgess\ transect\ (Table\ 1)\ may\ be\ understood\ in\ the\ context\ of\ the\ dispersion\ array\ if\ upgradient\ Burgess\ transect\ wells\ tap\ ground\ water\ primarily\ from\ locations\ either\ between\ or\ below\ NO_3\ plumes\ and$

The elevated concentrations of NH_4 in many of the study area ground-water samples are unusual. Although N in septic tank effluent is predominantly in the form of NH_4 , reduced forms of N in septic tank effluent are rapidly oxidized to NO_3 in the unsaturated zone in the drainfields

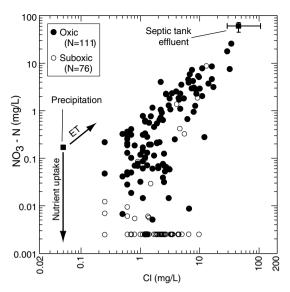


Figure 5 NO₃ and Cl concentrations from ODEQ aquifer-scale synoptic. End-member mixing components are septic tank effluent and atmospheric precipitation; see text for discussion of these components. ODEQ synoptic samples are interpreted to represent a mixture of precipitation and septic tank effluent, where precipitation may be subject to enrichment by evapotranspiration (ET) and to vegetative NO₃ uptake (arrows). Low NO₃ concentrations in most suboxic samples are interpreted to represent effects of denitrification in the saturated zone. Square symbols showing septic tank effluent and unevaporated precipitation represent total nitrogen (septic tank effluent) or NO₃ + NH₄ (atmospheric precipitation) plotted as equivalent NO₃. Concentrations below detection limit plotted at half the detection limit.

(Walker et al., 1973; Robertson and Cherry, 1992; MacQuarrie et al., 2001). Subsequent reduction of NO_3 in downgradient reducing regions of an aquifer could yield either NH_4 or N_2 , but reduction to NH_4 is generally for assimilative pur-

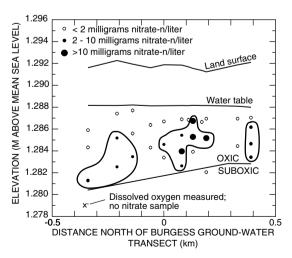


Figure 6 Dispersion array of ground-water samples. Array oriented perpendicular to Burgess transect at second nest (at flowpath distance of 2.0 km in Fig. 3). Ground water flow is out of page towards reader. NO_3 is present in isolated plumes.

poses (Brock and Madigan, 1988), and most NO₃ reduction in flowing ground water has been attributed to dissimilative reduction to N₂ (Freeze and Cherry, 1979). Elevated concentrations of NH₄ observed in the ODEQ synoptic network tended to be deep or (apparently) near the ends of ground-water flowpaths, consistent with either NO₃ reduction or a natural, possibly sedimentary organic matter source for the NH₄, perhaps associated with the lacustrine deposits that underlie the primary aquifer. However, the low Cl concentrations of NH₄-rich ODEQ synoptic ground water (Fig. 7) point to a source other than septic tank effluent for the elevated concentrations of NH₄. That is, the Cl data make it highly unlikely that the NH₄ could have originated directly from septic tank N, or by oxidation of septic tank N to NO₃ with subsequent, downgradient reduction to NH₄. A similar conclusion is indicated by data from the Burgess and Century transects, where elevated concentrations of NH₄ are associated with low-Cl ground water (Fig. 7), and are found in downgradient (Fig. 3 and Table 1), older (Fig. 4) and Table 2) ground water. The Cl data, therefore, are inconsistent with a septic tank source for the elevated NH₄. A more likely possibility is that NH₄ is derived from natural sedimentary organic matter.

Additional insight into the origin of the NH₄ is provided by detailed analyses of ground water from 11 sites with elevated concentrations of NH₄ (Tables 1 and 2). These samples contain high concentrations of Fe (median 1.6 mg/L) and CH₄ (median 74 mg/L for a subset of eight samples), reflecting highly reducing conditions that typically accompany organic matter degradation. These samples also contain elevated concentrations of P (median 2.1 mg/L), which might have been mobilized during organic matter degradation. Total carbon (C) and total N for the subset of these sites at which dissolved gases were analyzed are well correlated, with $r^2 = 0.85$ and C:N mass ratio of 6.0 (slope of "line of organic correlation", for functional relationships in which neither variable is the independent variable; Helsel and Hirsch, 1992). For this correlation, total C was defined to be inorganic carbon + DOC + CH₄, and total N was defined to be Kjeldahl N + NO₃ (N₂ excluded because largely of atmospheric origin). Because carbonate phases are not


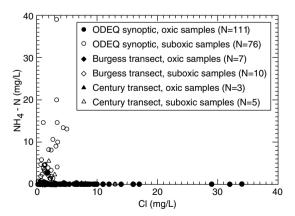


Figure 7 $\,$ NH₄ and Cl concentrations from transects and ODEQ aquifer-scale synoptic. Elevated concentrations of NH₄ are associated with low Cl concentrations, indicative of a natural, presumably sedimentary source of NH₄. Elevated concentrations of NH₄ also tend to be suboxic.

known to be present in the aquifer, the observed correlation is consistent with an organic matter source of N (C:N of photosynthetic organic matter is typically 106:16 on a molar basis, or about 5.7:1 on a mass ratio basis). Finally, ^3H concentrations mostly are $\leqslant\!0.1$ TU (Table 2), reflecting dominantly pre-bomb ground water that is less likely to have received inputs of anthropogenic N than would more recently recharged ground water.

N isotopes can be useful locally in identifying N sources. For example, $\delta^{15}N$ values of NO₃ derived from wastewater sources typically are >5%, but <5% for NO₃ derived from natural soil organic matter (Fogg et al., 1998). The $\delta^{15}N-$ NO₃ values from shallow ground water along transects are, for the most part, both similar to $\delta^{15}N-NO_3$ values from septic tank effluent plumes, and distinct from $\delta^{15}N-NH_4$ values for elevated-NH₄ network sites and transect sites with elevated NH₄ concentrations (Fig. 8). Two samples did have $\delta^{15}N-NO_3$ values <5%. NO₃ in these samples could represent NO₃ that is, at least in part, of natural origin. Alternatively, fractionation of septic-tank-derived N during NH₄ nitrification in the unsaturated zone beneath drainfields upgradient from these two sites, in combination with sorption of a portion of the NH₄, could result in isotopically depleted aqueous NO₃ (Hübner, 1986). These two samples notwithstanding, the overall similarity between the $\delta^{15}N-NO_3$ values from shallow ground water along transects and those representing septic tank effluent further support the concept of septic tank effluent being the predominant NO₃ source in study area ground water. Furthermore, differences between $\delta^{15}N-NO_3$ values of transect and septic tank effluent plume samples on the one hand, and $\delta^{15}N-NH_4$ values of high-NH₄ ground-water samples on the other, indicate that the source of elevated concentrations of NH₄ is distinct from that of most of the NO3. The isotopic data are inconsistent with transport and subsequent reduction of septic-tank-derived NO₃ to NH₄ because reduction of all of the NO_3 to NH_4 would yield $\delta^{15}N-NH_4$ values greater than those observed. Reduction of only a portion of the NO₃ to

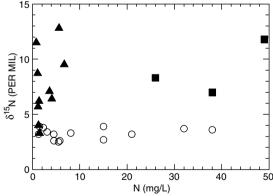

EXPLANATION

- NH₄ from elevated-NH₄ network and pre-bomb transect water at Burgess 6.2 and at Century 1.2 and 6.2
- NO₃ in plumes downgradient from septic tanks
- ▲ NO₃ in shallow transect ground water

Figure 8 $\,$ Nitrogen concentrations and $\delta^{\rm 15}{\rm N}$ values for study area ground water.

NH₄, with kinetic fractionation, could yield smaller δ^{15} N-NH₄ values, but would be unlikely to yield consistently such a small range of $\delta^{15}N-NH_4$ values (2.5-3.9%) across a large range of NH₄−N concentrations (1.3–38 mg/L). It also would be difficult to reconcile the highest concentrations of NH₄-N (up to 38 mg/L) with only partial reduction of NO_3 to NH_4 . On the other hand, $\delta^{15}N-NH_4$ values are similar to those of aguifer sediments from the study area, which decrease with increasing N content and level off asymptotically at about 2-3% at higher N concentrations (provided as Supplemental data: supplemental_data_4.doc). Thus, the isotopic data are interpreted as additional evidence for a natural, sedimentary source of elevated aqueous NH₄ concentrations as mineralization of organic N may be accompanied by relatively little isotopic fractionation (Högberg, 1997; Kendall and Aravena, 2000).


Evidence for denitrification

Denitrification is the dominant NO_3 sink in most ground-water systems (Kinzelbach et al., 1991; Postma et al., 1991). Denitrification is inhibited by the presence of O_2 (Brock and Madigan, 1988), but once O_2 is consumed, denitrification is thermodynamically favored. Denitrification in aquifers commonly is coupled to oxidation of organic carbon:

$$1.25CH_2O + NO_3^- = 0.5N_2 + 1.25HCO_3^- + 0.25H^+ + 0.5H_2O$$
 (2)

where CH_2O represents organic carbon. NO_3 can also be denitrified by other electron donors, notably Fe sulfide (FeS₂) and other ferrous Fe phases (Kölle et al., 1985; Postma et al., 1991; Robertson et al., 1996; Straub et al., 1996; McMahon et al., 1999; Böhlke et al., 2002).

N₂ and Ar concentrations were used to assess the distribution of denitrification in the ground water. Concentrations of N2 and Ar from the Burgess and Century transects (Fig. 9, top) plot near or to the right of the curve representing 5.2 °C recharge with varying amounts of excess air (Heaton and Vogel, 1981). Offset to the right (high N₂) side of the excess air curve may reflect recharge at temperatures >5.2 $^{\circ}$ C for some samples. However, N₂ concentrations in several samples cannot be accounted for simply by warmer recharge temperatures, as the offsets in Fig. 9 are too great for an area with a mean annual air temperature of 7.2 °C or a mean annual soil temperature of around 8.2 °C, even if we disregard the fact that recharge occurs mainly from late fall through early spring. Furthermore, the presence of isotopically enriched N_2 ($\delta^{15}N-N_2 > 1.0\%$) in four samples provides evidence that some of this N₂ was nonatmospheric in origin. Dissolved N_2 in equilibrium with air will be enriched in ^{15}N relative to AIR by about 0.8% at a recharge temperature of 5.2 °C (Klots and Benson, 1963), whereas N₂ from excess air will be close to 0.0%. N is fractionated isotopically during denitrification, with product N_2 having lower $\delta^{15}N$ than reactant NO₃. However, when denitrification goes to completion (complete conversion from NO_3 to N_2) in a closed system, the $\delta^{15}N$ value of the N_2 produced by denitrification will be equal to that of the original NO₃ reactant. Given the range of δ^{15} N values observed in study area NO₃, 3.3–12.8% (Fig. 8), $\delta^{15}N-N_2$ values >1.0% in samples with little or no remaining NO₃ constitute evidence for denitrification, and

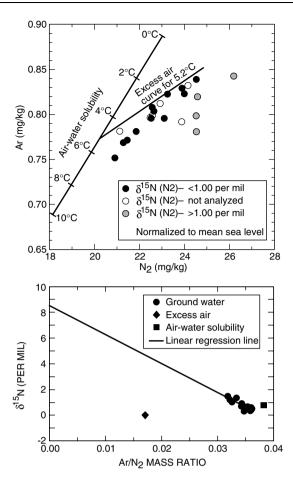

Top, N₂ and Ar concentrations in ground water, with Figure 9 air-water solubility curve (Weiss, 1970) and excess air trend. Data normalized to mean sea level (US Committee on Extension to the Standard Atmosphere, 1976). Isotopically enriched N₂ is interpreted to contain a component of NO3 that has been quantitatively denitrified. Bottom, Ar/N_2 ratios and $\delta^{15}N$ values for ground water and two recharge components consisting of air—water solubility (5.2 °C) and excess air ($\delta^{15}N$ values for these components discussed in text). N2 in ground water appears to be composed of a mixture of N2 derived from airwater solubility and excess air, with some samples containing additional, isotopically enriched N2. A linear regression line through the ground-water samples can be extrapolated to an N₂ end-member with $\delta^{15}N$ about 8.5%, consistent with a source as denitrified NO₃ of septic-tank origin.

represent denitrification of a few mg/L NO₃–N. Generally increasing $\delta^{15}N-N_2$ values with decreasing Ar/N₂ ratios, with a trend towards an N₂ end-member with $\delta^{15}N$ of about 8.5‰, also supports denitrification of septic-tank-derived NO₃ (Fig. 9, bottom).

The relation between NO_3 and Cl from the ODEQ synoptic network (Fig. 5) is interpreted to indicate mixing of NO_3 and Cl from two sources, with departure from this mixing zone explained by NO_3 loss in suboxic ($O_2 < 0.5 \text{ mg/L}$) ground water. Although vegetative uptake of NO_3 might occur locally where the water table is near land surface, this process cannot explain the widespread NO_3 loss implied by Fig. 5. Similarly, although reduction of NO_3 to NH_4 could

occur locally, spatial, temporal, and isotopic data are inconsistent with reduction of NO_3 to NH_4 ("Sources of NO_3 and NH_4 " section). Denitrification is considered to be the major mechanism for NO_3 loss in the suboxic ODEQ synoptic network samples.

Progressive geochemical evolution is evident in the Burgess transect data (Figs. 3 and 4). Increases in pH with increases in tracer-based apparent age reflect progression of kinetically slow hydrolysis reactions. Younger, upgradient ground water typically is oxic, with suboxic conditions developing after about 30 y of transport below the water table. NO₃ tends to be found in younger, upgradient ground water, whereas older water is essentially O2 and NO3 free. In general, concentrations of manganese (Mn) and Fe are higher in older ground water than in younger ground water, whereas SO₄ concentrations tend to be lower in older ground water than in younger ground water. These data reflect progression to increasingly reducing conditions as ground-water residence time increases. It appears that denitrification goes essentially to completion in the vicinity of the oxic/suboxic boundary. Similar patterns are evident in the Century transect data, with suboxic conditions developing after about 15 y of transport below the water table (Tables 1 and 2). As was observed in ODEQ synoptic network samples, NO₃ along the Burgess and Century transects generally is not present at concentrations >1 mg/L NO₃-N in suboxic ground water. Of the suboxic transect sites, only Century 5 (screened between 0.85 and 1.43 m of the water table) contained >1 mg/L NO₃-N. Thus, older ground water along these transects is largely NO₃-free because of a combination of (1) smaller N loadings at earlier time and (2) denitrification during geochemical evolution.

The dominant electron donor for study area denitrification reactions has not been identified. DOC is not likely to be an important electron donor for these reactions. DOC concentrations along the Burgess transect do not change systematically with ground-water evolution (Table 1), indicating little DOC consumption. Other studies also have noted that aqueous reductants generally play a minor role in denitrification reactions compared to the role played by solid phases (Kinzelbach et al., 1991; Postma et al., 1991; Böhlke and Denver, 1995; Aravena and Robertson, 1998; Böhlke et al., 2002). Even portions of aquifers directly receiving septic tank effluent generally do not receive sufficient DOC to balance denitrification, as organic carbon from septic tank effluent is efficiently oxidized in the unsaturated zone (Wilhelm et al., 1994; MacQuarrie et al., 2001; also, one of the samples from septic tank effluent plumes was analyzed for DOC, and at 2.2 mg/L (Table 1), suggests low DOC loading to the aquifer). Sedimentary organic carbon (SOC), on the other hand, could be a potential electron donor for denitrification as well as for other redox reactions. SOC is a common component of alluvial sediment. Furthermore, a sediment core penetrating the boundary between oxic and suboxic ground water exhibited an increase in SOC beneath the oxic/suboxic boundary 6.0 m below land surface (Hinkle et al., 2005). Excluding the uppermost layer of the core, which contains soil with plant detritus and thus is not representative of the organic carbon content of the aguifer, the core-layer-thickness-weighted organic carbon concentration of the sediment in the oxic zone was <0.07%, whereas that of the suboxic zone was 0.13%, indicating that the SOC was an electron donor at this redox boundary. Alternatively, ferrous Fe in volcanic sediment could be an electron donor in some study-area redox reactions, and other electron donors cannot be ruled out. Our solid-phase data do not allow definitive identification of electron donors.

A redox boundary approach for representing denitrification

Data from the ODEQ synoptic network demonstrate that NO₃ reactivity closely parallels O2 reactivity and indicate that denitrification proceeds quickly once O_2 is consumed (Fig. 5). Of 76 suboxic ODEQ synoptic network samples, only three contained >1 mg/L NO₃-N. These samples were from shallow wells (screened within 7 m of the water table), and probably represent conditions in which O₂ already had been reduced and in which denitrification was the dominant redox reaction. With only three of the suboxic samples representing the denitrification zone and the remaining 73 representing more reduced conditions, it would appear that the denitrification zone is narrow, and that the redox gradient near the oxic/suboxic boundary is sharp. It is also worth noting that the three suboxic sites with >1 mg/L NO₃-N did not yield consistent results when sampled by ODEQ on three other occasions during 1999-2001. NO₃-N concentrations were variable at these sites, and at times dropped below 1 mg/L at two sites. These data may indicate varying contributions of undenitrified and denitrified water from above and below a sharp redox boundary at or near the depth of the well screen.

An abrupt redox transition also is evident in the Burgess transect data (Fig. 3). There, the boundary between oxic and suboxic ground water is constrained by well placement to somewhere within a zone of about 2-3 m, and, within the resolution of the scale of well placement, NO_3 occurs essentially only on the oxic side of that boundary. Also, the apparent absence of ^{15}N -depleted N in N_2 (Fig. 9) indicates a relative paucity of intermediate-stage denitrification that would be expected to accompany slowly denitrifying NO_3 , further supporting a hypothesis of fast denitrification relative to the scales of observation.

These patterns of O_2 and NO_3 occurrence indicate that aquifer-scale NO_3 reactivity in the La Pine aquifer can be conceptualized with a redox boundary mapped on the basis of presence or absence of redox indicator species such as O_2 . An oxic/suboxic boundary for the La Pine aquifer was delineated (Fig. 10) by constraining the elevation of the oxic/suboxic boundary at each project well and then contouring these elevations in a manner similar to that required to map a subsurface lithologic contact from well logs. Such a redox boundary could be used for conceptualizing NO_3 reactivity for regional vulnerability assessments or could be used as a reaction boundary for an aquifer-scale NO_3 transport model.

The use of a redox boundary to conceptualize or represent NO_3 reactivity has limitations. Denitrification at microsites of anoxia within the oxic zone of the aquifer will not be accounted for with such a conceptualization; in transport simulations, this could lead to a positive bias in NO_3 concentrations in the oxic zone. Also, a redox boundary approach

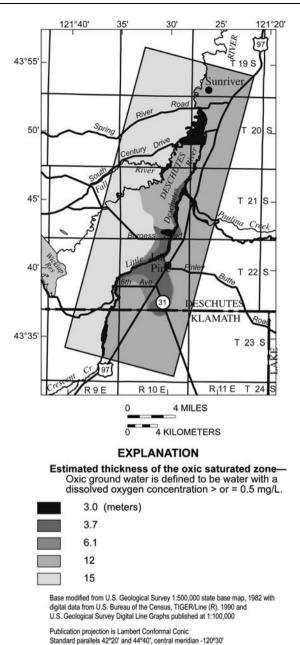


Figure 10 Map showing the estimated oxic saturated zone thickness (depth from top of water table to oxic/suboxic boundary), derived from contouring data from 256 wells.

Datum is NAD83

will not account for NO $_3$ that remains after O $_2$ has been consumed — usually NO $_3$ will continue to be advected for some discrete distance beyond the oxic/suboxic boundary. The combined effect of these two limitations in a redox-boundary transport simulation will be to misrepresent what may be a gradational NO $_3$ front as a sharp (presence/absence) front. Another limitation of a redox boundary conceptualization is that such a boundary will migrate as solid-phase electron donors are consumed by O $_2$ and NO $_3$ reduction. Nevertheless, the effectiveness of a redox boundary for characterizing zones of current NO $_3$ stability and instability in the La Pine aquifer is supported by analysis of ODEQ synoptic data. Of the ODEQ synoptic wells for which well con-

struction data were available and for which NO_3 concentrations were >1 mg/L NO_3 —N (37 wells), 35 were screened at least in part in the mapped (Fig. 10) oxic zone. Thus, the field data indicate that, on the temporal and spatial scales of ground-water flow in the La Pine aquifer, the redox boundary may give a better representation of NO_3 transport than a uniform kinetic reaction model because the redox boundary appears to be controlled by a heterogeneous distribution of electron donors.

Summary

Septic tank effluent is the primary anthropogenic source of NO₃ to the La Pine aguifer. In contrast, elevated concentrations of NH₄ in the aguifer appear to originate from a natural source, probably sedimentary organic matter. A septic tank source of NO₃ and Cl is evident in NO₃/Cl relations, demonstrating mixing of septic-tank-derived NO3 and Cl with a dilute precipitation end-member. Association of NH₄ with low-Cl ground water and correlation between total dissolved N and C in ground water are consistent with an organic matter source for the NH₄. δ^{15} N values in NO₃ were generally higher than $\delta^{15}N$ values in the NH₄, supporting a septic tank source for the NO₃ and a natural source for the NH₄. NO₃ was found in modern (<40 y), shallow ground water as isolated or coalescing plumes within several meters of the water table. NH₄ generally occurred in old (pre-bomb) ground water, either in deep portions of the aquifer or in shallow ground water near discharge zones where regional ground water discharges to rivers. Thus, although septic tank N itself occurs as reduced N, primarily as NH₄, this reduced N is readily oxidized once it leaves the septic tank environment, and it does not represent an important source of NH₄ in this aquifer system.

Denitrification in portions of the La Pine aquifer is indicated by decreases in NO₃/Cl ratios in suboxic water relative to oxic water, the timing of NO₃ loss relative to the progressive geochemical evolution towards increasingly reduced conditions, and the presence of elevated N₂/Ar ratios and $\delta^{15}\text{N-N}_2$ values in some samples. An aquifer-scale oxic/suboxic redox boundary successfully represents most instances of NO₃ stability and instability, and thus serves as an effective means of conceptualizing the occurrence of denitrification at the aquifer scale.

Acknowledgements

This work was funded by the Oregon Department of Environmental Quality, US Geological Survey Federal Matching Funds, and the US Geological Survey National Research Program. Barbara Rich, Dan Haldeman, Todd Cleveland, and Jill Johnson (Deschutes County Environmental Health Division) provided valuable information and logistical assistance.

Appendix A. Supplementary data

Supplementary data associated with this article can be found, in the online version, at doi:10.1016/j.jhydrol. 2006.09.013.

References

- Alhajjar, B.J., Harkin, J.M., Chesters, G., 1989. Detergent formula and characteristics of wastewater in septic tanks. Journal of the Water Pollution Control Federation 61, 605–613.
- Andrews, J.N., 1992. Mechanisms for noble gas dissolution by groundwaters. In: International Atomic Energy Agency (Ed.), Isotopes of Noble Gases as Tracers in Environmental Studies. International Atomic Energy Agency, Vienna, pp. 87–110.
- Aravena, R., Robertson, W.D., 1998. Use of multiple isotope tracers to evaluate denitrification in ground water: Study of nitrate from a large-flux septic system plume. Ground Water 36, 975–982.
- Bates, B.D., 2000. An evaluation of denitrification under fifty-six pressurized mound septic systems for several soil types in Wisconsin. M.S. Thesis, University of Wisconsin, Stevens Point, Wisconsin, 204 pp.
- Bauer, H.H., Vaccaro, J.J., 1987. Documentation of a deep percolation model for estimating ground-water recharge. US Geological Survey Open-File Report 86-536, 180 pp.
- Böhlke, J.K., Coplen, T.B., 1995. Interlaboratory comparison of reference materials for nitrogen-isotope-ratio measurements. In: International Atomic Energy Agency (Ed.), Reference and Intercomparison Materials for Stable Isotopes of Light Elements. International Atomic Energy Agency Report IAEA-TECDOC-825, Vienna, pp. 51–66.
- Böhlke, J.K., Denver, J.M., 1995. Combined use of groundwater dating, chemical, and isotopic analyses to resolve the history and fate of nitrate contamination in two agricultural watersheds, Atlantic coastal plain, Maryland. Water Resources Research 31, 2319—2339.
- Böhlke, J.K., Gwinn, C.J., Coplen, T.B., 1993. New reference materials for nitrogen-isotope-ratio measurements. Geostandards Newsletter 17, 159–164.
- Böhlke, J.K., Wanty, R., Tuttle, M., Delin, G., Landon, M., 2002. Denitrification in the recharge area and discharge area of a transient agricultural nitrate plume in a glacial outwash sand aquifer, Minnesota. Water Resources Research 38. doi:10.1029/2001WR000663.
- Böhlke, J.K., Smith, R.L., Miller, D.N., 2006. Ammonium transport and reaction in contaminated groundwater: Application of isotope tracers and isotope fractionation studies. Water Resources Research 42. doi:10.1029/2005WR004349.
- Boyd, T.G., 1996. Groundwater recharge of the middle Deschutes Basin, Oregon. M.S. Thesis, Portland State University, Portland, Oregon, 86 pp.
- Brenton, R.W., Arnett, T.L., 1993. Methods of analysis by the US Geological Survey National Water Quality Laboratory determination of dissolved organic carbon by UV-promoted persulfate oxidation and infrared spectrometry. US Geological Survey Open-File Report 92-480, 12 pp.
- Brock, T.D., Madigan, M.T., 1988. Biology of Microorganisms, fifth ed. Prentice-Hall, Englewood Cliffs, NJ, 835 pp..
- Bunnell, J.F., Zampella, R.A., Morgan, M.D., Gray, D.M., 1999. A comparison of nitrogen removal by subsurface pressure dosing and standard septic systems in sandy soils. Journal of Environmental Management 56, 209–219.
- Busenberg, E., Plummer, L.N., 1992. Use of chlorofluorocarbons (CCl_3F and CCl_2F_2) as hydrologic tracers and age-dating tools: The alluvium and terrace system of central Oklahoma. Water Resources Research 28, 2257–2283.
- Busenberg, E., Plummer, L.N., Bartholomay, R.C., Wayland, J.E., 1998. Chlorofluorocarbons, sulfur hexafluoride, and dissolved permanent gases in ground water from selected sites in and near the Idaho National Engineering and Environmental Laboratory, Idaho, 1994–97. US Geological Survey Open-File Report 98-274, 72 pp.

- Bushman, J.L., 1996. Transport and transformations of nitrogen compounds in effluent from sand filter-septic system draintile fields. M.S. Thesis, Oregon State University, Corvallis, Oregon, 78 pp.
- Century West Engineering Corporation, 1982. La Pine Aquifer Management Plan. Bend, Oregon, variously paged.
- Clesceri, L.S., Greenberg, A.E., Eaton, A.D., 1998. Standard Methods for the Examination of Water and Wastewater, 20th ed. American Public Health Association, Washington, DC, variously paged.
- Connor, B.F., Currier, J.P., Woodworth, M.T., 2001. Results of the US Geological Survey's analytical evaluation program for standard reference samples distributed in October 2000. US Geological Survey Open-File Report 01-137, 116 pp.
- Cook, P.G., Böhlke, J.K., 2000. Determining timescales for ground-water flow and solute transport. In: Cook, P.G., Herczeg, A.L. (Eds.), Environmental Tracers in Subsurface Hydrology. Kluwer, Boston, pp. 1–30.
- Cook, P.G., Solomon, D.K., 1997. Recent advances in dating young groundwater: chlorofluorocarbons, ³H/³He and ⁸⁵K. Journal of Hydrology 191, 245–265.
- Coplen, T.B., 1993. Uses of environmental isotopes. In: Alley, W.M. (Ed.), Regional Ground-Water Quality. Van Nostrand Reinhold, New York, pp. 227–254.
- Farrar, J.W., Copen, A.M., 2000. Results of the US Geological Survey's analytical evaluation program for standard reference samples distributed in March 2000. US Geological Survey Open-File Report 00-398, 107 pp.
- Fishman, M.J. (Ed.), 1993. Methods of analysis by the US Geological Survey National Water Quality Laboratory determination of inorganic and organic constituents in water and fluvial sediments. US Geological Survey Open-File Report 93-125, 217 pp.
- Fishman, M.J., Friedman, L.C., 1989. Methods for determination of inorganic substances in water and fluvial sediments. US Geological Survey Techniques of Water-Resources Investigations, Book 5, Chapter A1, 545 pp.
- Fogg, G.E., Rolston, D.E., Decker, D.L., Louie, D.T., Grismer, M.E., 1998. Spatial variation in nitrogen isotope values beneath nitrate contamination sources. Ground Water 36, 418–426.
- Freeze, R.A., Cherry, J.A., 1979. Groundwater. Prentice-Hall, Englewood Cliffs, New Jersey, 604 pp..
- Gannett, M.W., Lite, K.E., Jr., Morgan, D.S., Collins, C.A., 2001. Ground-water hydrology of the Upper Deschutes Basin, Oregon. US Geological Survey Water-Resources Investigations Report 00-4162, 77 pp.
- Heaton, T.H.E., Vogel, J.C., 1981. Excess air in groundwater. Journal of Hydrology 50, 201–216.
- Helsel, D.R., Hirsch, R.M., 1992. Statistical Methods in Water Resources. Elsevier, Amsterdam, 522 pp..
- Hinkle, S.R., Weick, R.J., Johnson, J.M., Cahill, J.D., Smith, S.G., Rich, B.J., 2005. Organic wastewater compounds, pharmaceuticals, and coliphage in ground water receiving discharge from onsite wastewater treatment systems near La Pine, Oregon: occurrence and implications for transport. US Geological Survey Scientific Investigations Report 2005-5055, 98 pp.
- Högberg, P., 1997. Tansley Review No. 95 ¹⁵N natural abundance in soil-plant systems. New Phytologist 137, 179–203.
- Howarth, R.W., Marino, R., 2006. Nitrogen as the limiting nutrient for eutrophication in coastal marine ecosystems: Evolving views over three decades. Limnology and Oceanography 51, 364–376.
- Hübner, H., 1986. Isotope effects of nitrogen in the soil and biosphere. In: Fritz, P., Fontes, J.Ch. (Eds.), Handbook of Environmental Isotope Geochemistry, vol. 2. Elsevier, New York, pp. 361–425.
- Kendall, C., Aravena, R., 2000. Nitrate isotopes in groundwater systems. In: Cook, P.G., Herczeg, A.L. (Eds.), Environmental Tracers in Subsurface Hydrology. Kluwer, Boston, pp. 261–297.

Kinzelbach, W., Schafer, W., Herzer, J., 1991. Numerical modeling of natural and enhanced denitrification processes in aquifers. Water Resources Research 27, 1123—1135.

- Klots, C.E., Benson, B.B., 1963. Isotope effect in the solution of oxygen and nitrogen in distilled water. Journal of Chemical Physics 38, 890–892.
- Kölle, W., Strebel, O., Böttcher, J., 1985. Formation of sulfate by microbial denitrification in a reducing aquifer. Water Supply 3, 35–40.
- Lite, K.E., Jr., Gannett, M.W., 2002. Geologic framework of the regional ground-water flow system in the upper Deschutes Basin, Oregon. US Geological Survey Water-Resources Investigations Report 02-4015, 44 pp.
- MacQuarrie, K.T.B., Sudicky, E.A., Robertson, W.D., 2001. Multicomponent simulation of wastewater-derived nitrogen and carbon in shallow unconfined aquifers II. Model application to a field site. Journal of Contaminant Hydrology 47, 85–104.
- McMahon, P.B., Böhlke, J.K., Bruce, B.W., 1999. Denitrification in marine shales in northeastern Colorado. Water Resources Research 35, 1629—1642.
- Morgan, D.S., Hinkle, S.R., Weick, R.J., 2002. Simulation of flow and transport of septic-derived nitrate at multiple scales within a heterogeneous alluvial aquifer system. Abstract. Eos, Transactions of the American Geophysical Union, 83, fall meeting supplement.
- National Atmospheric Deposition Program, no date. Statistical summary of precipitation chemistry for valid samples. Retrieved April 27, 2005 from http://nadp.sws.uiuc.edu/nadpdata/.
- National Climatic Data Center, 2005a. Bend, Oregon NCDC 1961—1990 Monthly Normals. Retrieved April 27, 2005 from http://www.wrcc.dri.edu/cgi-bin/cliMAIN.pl?orbend.
- National Climatic Data Center, 2005b. Wickiup Dam, Oregon NCDC 1961–1990 Monthly Normals. Retrieved April 27, 2005 from http://www.wrcc.dri.edu/cgi-bin/cliMAIN.pl?orwick.
- Oregon Department of Environmental Quality, 1982. Oregon On-Site Experimental Systems Program. Portland, Oregon, variously paged.
- Oregon Department of Environmental Quality, 1994. Statewide Groundwater Monitoring Program, Lapine Area Groundwater Investigation, Deschutes County, Oregon, v. II. Portland, Oregon, variously paged.
- Östlund, H.G., Dorsey, H.G., Rooth, C.G., 1974. GEOSECS North Atlantic radiocarbon and tritium results. Earth and Planetary Science Letters 23, 69—86.
- Patton, C.J., Truitt, E.P., 1992. Methods of analysis by the US Geological Survey National Water Quality Laboratory determination of total phosphorus by a Kjeldahl digestion method and an automated colorimetric finish that includes dialysis. US Geological Survey Open-File Report 92-146, 39 pp.
- Patton, C.J., Truitt, E.P., 2000. Methods of analysis by the US Geological Survey National Water Quality Laboratory determination of ammonium plus organic nitrogen by a Kjeldahl digestion method and an automated photometric finish that includes digest cleanup by gas diffusion. US Geological Survey Open-File Report 00-170, 31 pp.
- Plummer, L.N., Busenberg, E., 2000. Chlorofluorocarbons. In: Cook, P.G., Herczeg, A.L. (Eds.), Environmental Tracers in Subsurface Hydrology. Kluwer, Boston, pp. 441–478.
- Plummer, L.N., Mullin, A.H., 1997a. Tritium/helium dating of ground-water samples available through contract with Lamont-Doherty Earth Observatory of Columbia University, Palisades, New York. US Geological Survey National Water Quality Laboratory Technical Memorandum 97.04 (available at http://wwwnwql.cr.usgs.gov/Public/tech_memos/nwql.97-04.html).

- Plummer, L.N., Mullin, A.H., 1997b. Collection, processing, and analysis of ground-water samples for tritium/helium-3 dating. US Geological Survey National Water Quality Laboratory Technical Memorandum 97.04S (available at http://wwwnwql.gov/public/tech_memos/sup_nwql.97-04S.html).
- Postma, D., Boesen, C., Kristiansen, H., Larsen, F., 1991. Nitrate reduction in an unconfined sandy aquifer: Water chemistry, reduction processes, and geochemical modeling. Water Resources Research 27, 2027—2045.
- Puckett, L.J., Cowdery, T.K., McMahon, P.B., Tornes, L.H., Stoner, J.D., 2002. Using chemical, hydrologic, and age dating analysis to delineate redox processes and flow paths in the riparian zone of a glacial outwash aquifer-stream system. Water Resources Research 38. doi:10.1029/2001WR000396.
- Rich, B.J., 2001. Oregon Department of Environmental Quality, written communication.
- Robertson, W.D., Cherry, J.A., 1992. Hydrogeology of an unconfined sand aquifer and its effect on the behavior of nitrogen from a large-flux septic system. Applied Hydrogeology 1, 32—44
- Robertson, W.D., Russell, B.M., Cherry, J.A., 1996. Attenuation of nitrate in aquitard sediments of southern Ontario. Journal of Hydrology 180, 267–281.
- Schlosser, P., Stute, M., Sonntag, C., Münnich, K.O., 1989. Tritiogenic ³He in shallow groundwater. Earth and Planetary Science Letters 94, 245–256.
- Solomon, D.K., Cook, P.G., 2000. ³H and ³He. In: Cook, P.G., Herczeg, A.L. (Eds.), Environmental Tracers in Subsurface Hydrology. Kluwer, Boston, pp. 397–424.
- Spalding, R.F., Exner, M.E., 1993. Occurrence of nitrate in ground-water a review. Journal of Environmental Quality 22, 392—402
- Straub, K.L., Benz, M., Schink, B., Widdel, F., 1996. Anaerobic, nitrate-dependent microbial oxidation of ferrous iron. Applied and Environmental Microbiology 62, 1458—1460.
- Stute, M., Schlosser, P., 2000. Atmospheric noble gases. In: Cook, P.G., Herczeg, A.L. (Eds.), Environmental Tracers in Subsurface Hydrology. Kluwer, Boston, pp. 349–377.
- Taylor, G.H., 1993. Normal annual precipitation, State of Oregon. Oregon Climate Service, Oregon State University, Corvallis, map.
- Tesoriero, A.J., Liebscher, H., Cox, S.E., 2000. Mechanism and rate of denitrification in an agricultural watershed: Electron and mass balance along groundwater flow paths. Water Resources Research 36, 1545–1559.
- US Committee on Extension to the Standard Atmosphere, 1976. US Standard Atmosphere, 1976. US Government Printing Office, Washington, DC, 227 pp.
- US Environmental Protection Agency, 1978. Management of small waste flows. US Environmental Protection Agency report EPA-600/2-78-173, Cincinnati, Ohio, variously paged.
- US Geological Survey, 1999. National field manual for the collection of water-quality data. US Geological Survey Techniques of Water-Resources Investigations, book 9, Chapters A1—A9, variously paged (available at http://pubs.water.usgs.gov/twri9A).
- Vogel, J.C., 1967. Investigation of groundwater flow with radiocarbon. In: International Atomic Energy Agency (Ed.), Isotopes in Hydrology. IAEA, Vienna, pp. 355—369.
- Walker, W.G., Bouma, J., Keeney, D.R., Magdoff, F.R., 1973. Nitrogen transformations during subsurface disposal of septic tank effluent in sands: I. Soil transformations. Journal of Environmental Quality 2, 475–480.
- Weiss, R.F., 1970. The solubility of nitrogen, oxygen, and argon in water and seawater. Deep-Sea Research 17, 721–735.
- Weiss, R.F., 1971. Solubility of helium and neon in water and seawater. Journal of Chemical and Engineering Data 16, 235—241.

- Wilhelm, S.R., Schiff, S.L., Cherry, J.A., 1994. Biogeochemical evolution of domestic waste water in septic systems: 1. Conceptual model. Ground Water 32, 905—916.
- Wilhelm, S.R., Schiff, S.L., Robertson, W.D., 1996. Biogeochemical evolution of domestic waste water in septic systems: 2.
- Application of conceptual model in sandy aquifers. Ground Water 34, 853—864.
- World Health Organization, 1996. Guidelines for Drinking-Water Quality, vol. 2, Health Criteria and Other Supporting Information, second ed. World Health Organization, Geneva, 973 pp.