

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F.
Larsen

January 2005

Test 1864: Massey Ferguson 471 and 573 Diesel 8-peed

Tractor Museum

University of Nebraska-Lincoln, TractorMuseumArchives@unl.edu

Follow this and additional works at: <http://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Applied Mechanics Commons](#)

Museum, Tractor, "Test 1864: Massey Ferguson 471 and 573 Diesel 8-peed" (2005). *Nebraska Tractor Tests*. 2114.
<http://digitalcommons.unl.edu/tractormuseumlit/2114>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

NEBRASKA TRACTOR TEST 1864 MASSEY FERGUSON 471 DIESEL ALSO MASSEY FERGUSON 573 DIESEL 8 SPEED

POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
---------------------	--------------------------------	-----------------	-----------------------	-----------------------	--------------------------------

MAXIMUM POWER AND FUEL CONSUMPTION

Rated Engine Speed—(PTO speed—622 rpm)					
64.28 (47.94)	2200	4.27 (16.17)	0.469 (0.285)	15.05 (2.96)	
Maximum Power (1 hour)					
66.23 (49.39)	2100	4.33 (16.40)	0.461 (0.281)	15.29 (3.01)	
Standard Power Take-off Speed - (540 rpm)					
64.17 (47.85)	1909	4.13 (15.65)	0.454 (0.276)	15.52 (3.06)	

VARYING POWER AND FUEL CONSUMPTION

64.28 (47.94)	2200	4.27 (16.17)	0.469 (0.285)	15.05 (2.96)	Air temperature
55.48 (41.37)	2223	3.83 (14.50)	0.487 (0.296)	14.49 (2.85)	81°F (27°C)
41.71 (31.10)	2247	3.08 (11.65)	0.520 (0.316)	13.55 (2.67)	Relative humidity
28.07 (20.93)	2268	2.43 (9.18)	0.609 (0.371)	11.57 (2.28)	55%
14.19 (10.58)	2292	1.84 (6.98)	0.916 (0.557)	7.70 (1.52)	Barometer
0.93 (0.70)	2310	1.35 (5.10)	10.188 (6.197)	0.69 (0.14)	29.04"Hg (98.34kPa)

Maximum torque 203 lb.-ft. (275 Nm) at 1053 rpm
Maximum torque rise - 31.9%
Torque rise at 1799 rpm - 20%

TRACTOR SOUND LEVEL WITHOUT CAB

	dB(A)
At no load in 4th(4L) gear	94.1
Bystander	--

TIRES AND WEIGHT

Rear Tires—No., size, ply & psi (kPa)
Front Tires—No., size, ply & psi (kPa)
Height of Drawbar
Static Weight with operator—Rear
—Front
—Total

Tested Without Ballast

Two 16.9-30; 8; 16 (110)
Two 9.5L-15; 6; 32 (220)
18.0 in (455 mm)
3880 lb (1760 kg)
2305 lb (1046 kg)
6185 lb (2806 kg)

Location of tests: Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln Nebraska 68583-0832

Dates of tests: October 31- November 3, 2005

Manufacturer: AGCO Corporation, 4205 River Green Parkway, Duluth, Georgia 30096

FUEL, OIL and TIME: Fuel No. 2 Diesel Specific gravity converted to 60°/60° F (15°/15°C) 0.8468 Fuel weight 7.051 lbs/gal (0.845 kg/l) Oil SAE 15W40 API service classification CF-4 Transmission and hydraulic lubricant AGCO Power Fluid 821 XL fluid Total time engine was operated 7.5 hours

ENGINE: Make Perkins Diesel **Type** four cylinder vertical **Serial No.** RE37827*B505650M* **Crankshaft** lengthwise **Rated engine speed** 2200 **Bore and stroke** 4.134" x 5.00" (105.0 mm x 127.0 mm) **Compression ratio** 19.3 to 1 **Displacement** 268 cu in (4400 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** two paper elements **Oil filter** one full flow cartridge **Fuel filter** one paper element and water separator **Muffler** vertical **Cooling medium temperature control** one thermostat

ENGINE OPERATING PARAMETERS: Fuel rate: 28.9 - 31.3 lb/h (13.1 - 14.2 kg/h) **High idle:** 2300 - 2400 rpm

CHASSIS: Type Standard **Serial No.** 9363BP32086 **Tread width** rear 61.4" (1560 mm) to 88.1" (2238 mm) front 59.1" (1500 mm) to 83.5" (2120 mm) **Wheelbase** 90.2" (2350 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio **Nominal travel speeds mph (km/h)** first 1.33 (2.14) second 1.95 (3.14) third 3.58 (5.76) fourth 4.39 (7.07) fifth 5.33 (8.58) sixth 7.82 (12.59) seventh 14.33 (23.06) eighth 17.56 (28.26) reverse 1.81 (2.92), 7.25 (11.67) **Clutch** single dry disc operated by foot pedal **Brakes** multiple wet disc hydraulically operated by two foot pedals which can be locked together **Steering** hydrostatic **Power take-off** 540 rpm at 1908 engine rpm **Unladen tractor mass** 6010 lb (2726 kg)

THREE POINT HITCH PERFORMANCE (OECD Static Test)

CATEGORY: II

Quick Attach: None

Maximum force exerted through whole range: 3391 lbs (15.1 kN)

i) Opening pressure of relief valve: NA

Auxiliary pump
Sustained pressure of the open relief valve: 2575 psi (178 bar)

ii) Pump delivery rate at minimum pressure and rated engine speed: 10.0 GPM (37.9 l/min)

iii) Pump delivery rate at maximum hydraulic power: 8.9 GPM (33.7 l/min)

Delivery pressure: 1804 psi (124 bar)

Power: 9.4 HP (7.0 kW)

THREE POINT HITCH PERFORMANCE

Observed maximum pressure psi.(bar) 2750(190)

Location: lift cylinder

Hydraulic oil temperature: °F(°C) 144(62)

Location: hydraulic valve

Category: II

Quick attach: none

SAE Static Test—System pressure 2385 psi (164 Bar)


Hitch point distance to ground level in. (mm) 8.0(203) 15.0(381) 22.0(559) 29.0(737) 36.0(914)

Lift force on frame lb 4007 4147 4227 4102 3947

" " " " " (kN) (17.8) (18.4) (18.8) (18.2) (17.6)

	SAE test		OECD test	
	inch	mm	inch	mm
A	28.5	724	29.7	754
B	10.5	267	10.5	267
C	12.0	304	12.0	304
D	9.1	232	9.1	232
E	8.0	204	8.0	204
F	8.4	212	8.4	212
G	27.4	695	27.4	695
H	3.7	95	3.7	95
I	6.9	175	6.9	175
J	19.0	483	19.0	483
K	19.1	484	19.1	484
L	36.3	922	36.3	922
M	24.5	622	24.5	622
N	37.7	958	37.7	958
O	8.0	203	8.0	203
P	38.0	965	43.0	1093
Q	35.8	909	35.8	909
R	26.0	660	26.0	660

HITCH DIMENSIONS AS TESTED - NO LOAD

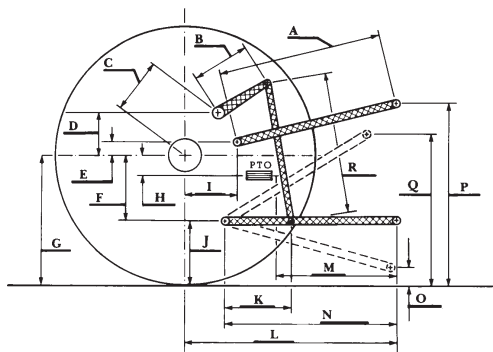

MASSEY FERGUSON 471 Diesel

Institute of Agriculture and Natural Resources
University of Nebraska-Lincoln

REPAIRS AND ADJUSTMENTS: No repairs or adjustments.

REMARKS: All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. This tractor did not meet the manufacturer's remote flow claim of 11.2 GPM (42.4 lpm) with auxiliary pump. The manufacturer's claim of 15.5 GPM (58.6 lpm) with auxiliary and lift pumps combined was not verified. For the maximum power tests, the fuel temperature at the injection pump inlet was maintained at 147°F (64°C).

Report reissued: Supplemental sales permit for Massey Ferguson 573 Diesel, October, 2006.

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. **1864**, November 3, 2006.

Roger M. Hoy
Director

M.F. Kocher
V.I. Adamchuk
J.A. Smith
Board of Tractor Test Engineers