

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

---

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F.  
Larsen

---

January 2000

## Test 1769: White 6410

Nebraska Tractor Test Lab

University of Nebraska-Lincoln, [tractortestlab@unl.edu](mailto:tractortestlab@unl.edu)

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Energy Systems Commons](#), [History of Science, Technology, and Medicine Commons](#), [Other Mechanical Engineering Commons](#), [Physical Sciences and Mathematics Commons](#), [Science and Mathematics Education Commons](#), and the [United States History Commons](#)

---

Nebraska Tractor Test Lab, "Test 1769: White 6410" (2000). *Nebraska Tractor Tests*. 121.  
<https://digitalcommons.unl.edu/tractormuseumlit/121>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

# NEBRASKA TRACTOR TEST 1769

## WHITE 6410 DIESEL

### ALSO AGCO ALLIS 8745 DIESEL(CUMMINS ENGINE)

### ALSO AGCO LT70 DIESEL

## 12 SPEED

#### POWER TAKE-OFF PERFORMANCE

| Power<br>HP<br>(kW)                        | Crank<br>shaft<br>rpm | Gal/hr<br>(l/h) | lb/hp.hr<br>(kg/kW.h) | Hp.hr/gal<br>(kW.h/l) | Mean Atmospheric<br>Conditions |
|--|-----------------------|-----------------|-----------------------|-----------------------|--------------------------------|
| MAXIMUM POWER AND FUEL CONSUMPTION         |                       |                 |                       |                       |                                |
| Rated Engine Speed (PTO speed 1100 rpm)    |                       |                 |                       |                       |                                |
| 70.40<br>(52.50)                           | 2200                  | 4.87<br>(18.43) | 0.489<br>(0.297)      | 14.46<br>(2.85)       |                                |
| Standard Power Take-off Speed - (1000 rpm) |                       |                 |                       |                       |                                |
| 74.89<br>(55.85)                           | 2000                  | 4.76<br>(18.01) | 0.449<br>(0.273)      | 15.74<br>(3.10)       |                                |
| Maximum Power (2 hours)                    |                       |                 |                       |                       |                                |
| 75.23<br>(56.10)                           | 1901                  | 4.63<br>(17.55) | 0.435<br>(0.265)      | 16.23<br>(3.20)       |                                |

#### VARYING POWER AND FUEL CONSUMPTION

|                  |      |                 |                   |                 |                      |
|------------------|------|-----------------|-------------------|-----------------|----------------------|
| 70.40<br>(52.50) | 2200 | 4.87<br>(18.43) | 0.489<br>(0.297)  | 14.46<br>(2.85) | Air temperature      |
| 60.94<br>(45.44) | 2247 | 4.37<br>(16.55) | 0.507<br>(0.308)  | 13.94<br>(2.75) | 76°F (24°C)          |
| 46.14<br>(34.41) | 2278 | 3.74<br>(14.14) | 0.572<br>(0.348)  | 12.35<br>(2.43) | Relative humidity    |
| 31.39<br>(23.41) | 2310 | 3.01<br>(11.39) | 0.679<br>(0.413)  | 10.42<br>(2.05) | 28%                  |
| 15.91<br>(11.86) | 2346 | 2.38<br>(9.01)  | 1.056<br>(0.642)  | 6.69<br>(1.32)  | Barometer            |
| 1.13<br>(0.84)   | 2377 | 1.74<br>(6.59)  | 10.876<br>(6.615) | 0.65<br>(0.13)  | 29.12"Hg (98.62 kPa) |

Maximum Torque 235 lb.-ft. (319 Nm) at 1401 rpm  
Maximum Torque Rise - 39.7%  
Torque rise at 1802 rpm - 27%

#### TRACTOR SOUND LEVEL WITH CAB

|                             | dB(A) |
|-----------------------------|-------|
| At no load in 6th(3LH) gear | 82.3  |
| Bystander                   | --    |

#### TIRES AND WEIGHT

**Rear Tires** No., size, ply & psi (kPa)  
**Front Tires** No., size, ply & psi (kPa)  
**Height of Drawbar**  
**Static Weight with operator** Rear  
Front  
Total

#### Tested Without Ballast

Two 18.4R34; \*\*, 16 (110)  
Two 10.00-16; 8; 32 (220)  
17.0 in (430 mm)  
5085 lb (2307 kg)  
3065 lb (1390 kg)  
8150 lb (3697 kg)

**Location of Test:** Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln Nebraska 68583-0832

**Dates of Test:** March 16-17, 2000

**Manufacturer:** AGCO Corporation, Duluth Georgia 30096

**FUEL, OIL and TIME:** Fuel No. 2 Diesel Specific gravity converted to 60°/60° F (15°/15°C) 0.8487 Fuel weight 7.067 lbs/gal (0.847 kg/l) Oil SAE 15W40 API service classification CE/CF-4 Transmission and hydraulic lubricant AGCO Power Fluid 821 XL fluid Total time engine was operated 10.0 hours

**ENGINE: Make** Cummins Diesel **Type** four cylinder vertical with turbocharger **Serial No.** 21299443 **Crankshaft** lengthwise **Rated engine speed** 2200 **Bore and stroke** 4.016" x 4.724" (102.0 mm x 120.0 mm) **Compression ratio** 17.0 to 1 **Displacement** 239 cu in (3920 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** one paper element and one polyester felt element **Oil filter** one full flow cartridge **Oil cooler** engine coolant heat exchanger for crankcase oil **Fuel filter** one paper element and water separator **Muffler** underhood **Exhaust** vertical **Cooling medium temperature control** one thermostat

**ENGINE OPERATING PARAMETERS: Fuel rate:** 32.7 - 36.1 lb/h (14.8 - 16.4 kg/h) **High idle:** 2350 - 2450 rpm **Turbo boost:** nominal 20.0 - 23.5 psi (138 - 162 kPa) as measured 21.8 psi (150 kPa)

**CHASSIS: Type** standard **Serial No.** G08191 **Tread width** rear 56.1" (1425 mm) to 83.9" (2130 mm) front 54.0" (1372 mm) to 78.0" (1981 mm) **Wheelbase** 96.0" (2438 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio **Nominal travel speeds mph (km/h)** first 1.44 (2.32) second 1.73 (2.79) third 2.16 (3.48) fourth 2.58 (4.16) fifth 3.96 (6.38) sixth 4.77 (7.68) seventh 5.90 (9.49) eighth 7.10 (11.42) ninth 8.85 (14.24) tenth 10.64 (17.13) eleventh 16.22 (26.10) twelfth 19.51 (31.40) reverse 2.16 (3.48), 2.60 (4.19), 8.85 (14.24), 10.64 (17.13) **Clutch** multiple wet disc operated by foot pedal **Brakes** single wet disc hydraulically operated by two foot pedals which can be locked together **Steering** hydrostatic **Power take-off** 540 rpm at 1902 engine rpm or 1000 rpm at 2000 engine rpm **Unladen tractor mass** 7975 lb (3617 kg)

### THREE POINT HITCH PERFORMANCE (OECD Static Test)

CATEGORY: II

Quick Attach: None

|  |                       |  |
|--|-----------------------|--|
| Maximum Force Exerted Through Whole Range:                         | 3348 lbs (14.9 kN)    | High lift Option<br>5733 lbs (25.5 kN) |
| i) Opening pressure of relief valve:                               | NA                    | Combined flow                          |
| Sustained pressure of the open relief valve:                       | 3010 psi (207 bar)    | 3030 psi (209 bar)                     |
| ii) Pump delivery rate at minimum pressure and rated engine speed: | 10.6 GPM (40.1 l/min) | 18.5 GPM (70.0 l/min)                  |
| iii) Pump delivery rate at maximum hydraulic power:                | 7.6 GPM (28.8 l/min)  | 14.9 GPM (56.4 l/min)                  |
| Delivery pressure:   | 2870 psi (198 bar)    | 2830 psi (195 bar)                     |
| Power:   | 12.7 HP (9.5 kW)      | 24.6 HP (18.3 kW)                      |

### THREE POINT HITCH PERFORMANCE

|                                      |                |
|--------------------------------------|----------------|
| Observed Maximum Pressure psi. (bar) | 3320 (229)     |
| Location:                            | lift cylinder  |
| Hydraulic oil temperature: °F (°C)   | 158 (70)       |
| Location:                            | hydraulic sump |
| Category:                            | II             |
| Quick attach:                        | none           |

#### SAE Static Test System pressure 2990 psi (206 Bar)

|   |           |            |            |            |            |
|---|-----------|------------|------------|------------|------------|
| Hitch point distance to ground level in. (mm) | 9.4 (239) | 14.9 (378) | 21.9 (556) | 28.9 (734) | 37.4 (950) |
| Lift force on frame lb                        | 4113      | 4500       | 4631       | 4613       | 4743       |
| " " " " " (kN)                                | (18.3)    | (20.0)     | (20.6)     | (20.5)     | (21.1)     |


#### High lift Option

##### SAE Static Test System pressure 2990 psi (206 Bar)

|   |           |            |            |            |            |
|---|-----------|------------|------------|------------|------------|
| Hitch point distance to ground level in. (mm) | 7.7 (196) | 14.7 (373) | 21.7 (551) | 28.7 (729) | 35.7 (907) |
| Lift force on frame lb                        | 6894      | 7421       | 7565       | 7488       | 7425       |
| " " " " " (kN)                                | (30.7)    | (33.0)     | (33.7)     | (33.3)     | (33.0)     |

|   | High lift option |      | High lift option |      |
|---|------------------|------|------------------|------|
|   | inch             | mm   | inch             | mm   |
| A | 31.0             | 788  | 34.0             | 864  |
| B | 12.2             | 310  | 12.2             | 310  |
| C | 15.1             | 384  | 15.1             | 384  |
| D | 9.4              | 240  | 9.4              | 240  |
| E | 7.6              | 192  | 7.6              | 192  |
| F | 8.3              | 210  | 11.0             | 280  |
| G | 31.3             | 795  | 31.3             | 795  |
| H | 1.3              | 32   | 1.3              | 32   |
| I | 5.7              | 145  | 5.7              | 145  |
| J | 23.0             | 585  | 20.3             | 515  |
| K | 26.3             | 667  | 24.5             | 622  |
| L | 38.3             | 972  | 41.3             | 1048 |
| M | 21.8             | 552  | 24.8             | 629  |
| N | 39.0             | 991  | 42.0             | 1067 |
| O | 7.9              | 200  | 7.9              | 200  |
| P | 47.0             | 1195 | 44.3             | 1125 |
| Q | 33.9             | 860  | 33.1             | 841  |
| R | 31.6             | 802  | 32.1             | 815  |

#### HITCH DIMENSIONS AS TESTED - NO LOAD

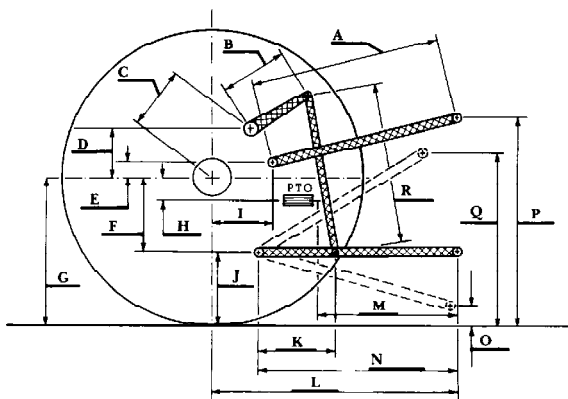

**REPAIRS AND ADJUSTMENTS:** No repairs or adjustments

**REMARKS:** All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. For the maximum power tests, the fuel temperature at the injection pump was maintained at 141°F (61°C).

**Report reissued:** Supplemental permits for AGCO Allis 8745 Diesel (Cummins engine) and AGCO LT 70 Diesel, November, 2001.

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. **1769**, November 6, 2001.

Leonard L. Bashford  
Director

M.F. Kocher  
V.I. Adamchuk  
G.J. Hoffman  
Board of Tractor Test Engineers



**White 6410 Diesel**

Agricultural Research Division  
Institute of Agriculture and Natural Resources  
University of Nebraska Lincoln  
Darrell Nelson, Dean and Director