

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F. Larsen

January 2005

Test 1858: McCormick MTX 150 Diesel

Nebraska Tractor Test Lab

University of Nebraska-Lincoln, tractortestlab@unl.edu

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Energy Systems Commons](#), [History of Science, Technology, and Medicine Commons](#), [Other Mechanical Engineering Commons](#), [Physical Sciences and Mathematics Commons](#), [Science and Mathematics Education Commons](#), and the [United States History Commons](#)

Nebraska Tractor Test Lab, "Test 1858: McCormick MTX 150 Diesel" (2005). *Nebraska Tractor Tests*. 254. <https://digitalcommons.unl.edu/tractormuseumlit/254>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

NEBRASKA OECD TRACTOR TEST 1858 - SUMMARY 485

McCORMICK MTX 150 DIESEL

16 SPEED

POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
MAXIMUM POWER AND FUEL CONSUMPTION					
Rated Engine Speed—(PTO speed—996 rpm)					
132.81 (99.04)	2200	7.77 (29.42)	0.413 (0.251)	17.09 (3.37)	
Maximum Power (1 hour)					
133.92 (99.86)	2100	7.60 (28.77)	0.400 (0.244)	17.62 (3.47)	
VARYING POWER AND FUEL CONSUMPTION					
132.81 (99.04)	2200	7.77 (29.42)	0.413 (0.251)	17.09 (3.37)	Air temperature
117.71 (87.77)	2296	7.20 (27.26)	0.432 (0.263)	16.35 (3.22)	81°F(27°C)
87.95 (65.58)	2295	5.81 (22.00)	0.466 (0.284)	15.13 (2.98)	Relative humidity
59.37 (44.27)	2317	4.44 (16.79)	0.527 (0.321)	13.38 (2.64)	51%
30.02 (22.38)	2323	3.22 (12.18)	0.756 (0.460)	9.33 (1.84)	Barometer
1.62 (1.21)	2351	2.07 (7.83)	9.009 (5.480)	0.78 (0.15)	28.73" Hg(97.29 kPa)
Maximum Torque - 402 lb.-ft.(545 Nm) at 1551 rpm					
Maximum Torque Rise -26.7%					
Torque rise at 1799 engine rpm -20%					

DRAWBAR PERFORMANCE (Unballasted - Front Drive Engaged) FUEL CONSUMPTION CHARACTERISTICS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Temp.°F (°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
Maximum Power—7th(II-3) Gear									
116.76 (87.07)	8974 (39.92)	4.88 (7.85)	2199	4.15	0.473 (0.287)	14.93 (2.94)	187 (86)	62 (17)	28.91 (97.90)
75% of Pull at Maximum Power—7th(II-3) Gear									
92.87 (69.25)	6764 (30.09)	5.15 (8.29)	2293	3.05	0.518 (0.315)	13.61 (2.68)	188 (87)	76 (24)	28.90 (97.87)
50% of Pull at Maximum Power—7th(II-3) Gear									
63.08 (47.04)	4511 (20.07)	5.24 (8.44)	2307	1.83	0.584 (0.355)	12.08 (2.38)	188 (86)	77 (25)	28.90 (97.87)
75% of Pull at Reduced Engine Speed—9th(III-1) Gear									
92.81 (69.21)	6806 (30.27)	5.11 (8.23)	1696	3.04	0.431 (0.262)	16.38 (3.23)	184 (84)	77 (25)	28.90 (97.87)
50% of Pull at Reduced Engine Speed—9th(III-1) Gear									
62.99 (46.98)	4513 (20.07)	5.23 (8.42)	1713	1.85	0.465 (0.283)	15.16 (2.99)	183 (84)	78 (26)	28.90 (97.87)

Location of tests: Nebraska Tractor Test Laboratory. University of Nebraska, Lincoln Nebraska, USA 68583-0832

Dates of tests: September 13-16, 2005

Manufacturer: McCormick Tractors Intr. Ltd., Doncaster, South Yorkshire, DN2 4PG, England

FUEL and OIL: Fuel No. 2 Diesel **Specific gravity converted to 60°/60°F (15°/15°C)** 0.8473 **Fuel weight** 7.055 lbs/gal (0.846 kg/l) **Oil SAE** 15W40 **API service classification** CG-4 **Transmission and hydraulic lubricant** McCormick HTX fluid **Front axle lubricant** API GL5 SAE 85W140 **Total time engine was operated** 18.0 hours

ENGINE: Make Iveco Diesel **Type** six cylinder vertical with turbocharger and air to air intercooler **Serial No.** 00208919 **Crankshaft** lengthwise **Rated engine speed** 2200 **Bore and stroke** 4.094" x 5.197" (104.0 mm x 132.0 mm) **Compression ratio** 17.5 to 1 **Displacement** 410 cu in (6728 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** two paper elements and aspirator **Oil filter** two full flow cartridges **Oil cooler** engine coolant heat exchanger for crankcase oil, radiator for hydraulic and transmission oil **Fuel filter** one paper element **Muffler** vertical **Cooling medium temperature control** thermostat and variable speed fan

ENGINE OPERATING PARAMETERS: **Fuel rate:** 52.7 - 58.2 lb/h (23.9 - 26.4 kg/h) **High idle:** 2325 - 2375 rpm **Turbo boost:** nominal 13.8 - 16.7 psi (95 - 115 kPa) as measured 15.0 psi (104 kPa)

CHASSIS: **Type** front wheel assist **Serial No.** ZT50AC4JJJE3335672 **Tread width** rear 60.2" (1530 mm) to 87.8" (2230 mm) front 60.2" (1530 mm) to 87.8" (2230 mm) **Wheelbase** 106.3" (2700 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio with partial (4) range operator controlled powershift **Nominal travel speeds mph (km/h)** first 1.78 (2.87) second 2.15 (3.46) third 2.66 (4.28) fourth 3.29 (5.30) fifth 3.34 (5.38) sixth 4.03 (6.48) seventh 4.98 (8.01) eighth 6.16 (9.91) ninth 6.69 (10.77) tenth 8.06 (12.97) eleventh 9.96 (16.03) twelfth 12.33 (19.85) thirteenth 13.01 (20.93) fourteenth 15.67 (25.22) fifteenth 19.37 (31.17) sixteenth 23.99 (38.61) reverse 2.06 (3.32), 2.49 (4.00), 3.08 (4.95), 3.81 (6.13), 3.87 (6.23), 4.66 (7.50), 5.76 (9.27), 7.13 (11.48), 7.74 (12.45), 9.32 (15.00), 11.52 (18.54), 14.27 (22.97)

DRAWBAR PERFORMANCE
(Unballasted - Front Drive Engaged)
MAXIMUM POWER IN SELECTED GEARS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Consumption Hp.hr/gal (kW.h/l)	Temp.°F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
5th(II-1) Gear									
109.04 (81.31)	13124 (58.38)	3.12 (5.01)	2237	10.42	0.507 (0.309)	13.91 (2.74)	188 (87)	58 (14)	28.91 (97.90)
6th(II-2) Gear									
116.17 (86.63)	11817 (52.57)	3.69 (5.93)	2103	6.43	0.466 (0.284)	15.13 (2.98)	187 (86)	59 (15)	28.91 (97.90)
7th(II-3) Gear									
117.45 (87.59)	9482 (42.18)	4.65 (7.48)	2102	4.49	0.458 (0.278)	15.42 (3.04)	187 (86)	63 (17)	28.91 (97.90)
8th(II-4) Gear									
116.54 (86.90)	7518 (33.44)	5.81 (9.35)	2098	3.39	0.456 (0.277)	15.47 (3.05)	188 (86)	66 (19)	28.91 (97.90)
9th(III-1) Gear									
116.11 (86.58)	6882 (30.61)	6.33 (10.18)	2098	3.00	0.461 (0.280)	15.30 (3.01)	188 (86)	67 (19)	28.91 (97.90)
10th(III-2) Gear									
114.94 (85.71)	5600 (24.91)	7.70 (12.39)	2103	2.33	0.464 (0.282)	15.22 (3.00)	188 (87)	70 (21)	28.91 (97.90)
11th(III-3) Gear									
114.00 (85.01)	4483 (19.94)	9.54 (15.35)	2096	1.81	0.473 (0.287)	14.93 (2.94)	186 (86)	71 (22)	28.91 (97.90)

Clutch multiple wet disc electro-hydraulically operated by foot pedal **Brakes** multiple wet disc hydraulically operated by two foot pedals that can be locked together **Steering** hydrostatic **Power take-off** 540rpm at 1877 engine rpm or 1000 rpm at 2209 engine rpm **Unladen tractor mass** 12760 lb (5787 kg)

REPAIRS AND ADJUSTMENTS: No repairs or adjustments

REMARKS: All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. This tractor did not meet the manufacturer's 3 point lift claim of 13137 lbs (5959 kg) at the hitch points with either the category II or category IIIN hitch. This tractor also did not meet the manufacturer's 3 point lift claim of 10183 lbs (4619 kg) at the frame with the category IIIN hitch. The pull in 5th(II-1) gear was limited to avoid excessive tractor bouncing. For the maximum power tests, the fuel temperature at the injection pump inlet was maintained at 146°F(63°C). The performance figures on this summary were taken from a test conducted under the OECD Code II test procedure.

We, the undersigned, certify that this is a true and correct report of official tractor Test No. **1858**, Nebraska Summary 485, November 21, 2005.

Leonard L. Bashford
Director

M.F. Kocher
V.I. Adamchuk
J.A. Smith
Board of Tractor Test Engineers

TRACTOR SOUND LEVEL WITH CAB	Front Wheel Drive	
	Disengaged dB(A)	Engaged dB(A)
At no load in 7th(II-3) gear	73.5	74.2
Bystander in 16th(IV-4)	80.9	--

TIRES AND WEIGHT

Rear tires - No., size, ply & psi (kPa)
Front tires - No., size, ply & psi (kPa)
Height of Drawbar
Static Weight with operator- Rear
- Front
- Total

Tested Without Ballast

Two 20.8R38; **; 16 (110)
Two 16.9R28; **; 14 (95)
18.5 in (470 mm)
7705 lb (3495 kg)
5230 lb (2372 kg)
12935 lb (5867 kg)

DRAWBAR PERFORMANCE **UNBALLASTED - FRONT DRIVE DISENGAGED** **FUEL CONSUMPTION CHARACTERISTICS**

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption		Temp. °F (°C)		Barom. inch Hg (kPa)
Maximum Power—8th (II-4) Gear									
114.18 (85.14)	7201 (32.03)	5.95 (9.57)	2200	5.04	0.481 (0.293)	14.65 (2.89)	188 (87)	65 (18)	28.91 (97.90)
75% of Pull at Maximum Power—8th (II-4) Gear									
91.27 (68.06)	5426 (24.14)	6.31 (10.15)	2294	3.47	0.526 (0.320)	13.41 (2.64)	188 (86)	73 (23)	28.91 (97.90)
50% of Pull at Maximum Power—8th (II-4) Gear									
61.96 (46.20)	3629 (16.14)	6.40 (10.30)	2300	2.27	0.601 (0.365)	11.74 (2.31)	188 (86)	74 (23)	28.91 (97.90)
75% of Pull at Reduced Engine Speed—10th (III-2) Gear									
91.38 (68.14)	5445 (24.22)	6.29 (10.13)	1752	3.48	0.448 (0.272)	15.75 (3.10)	184 (85)	75 (24)	28.91 (97.90)
50% of Pull at Reduced Engine Speed—10th (III-2) Gear									
61.55 (45.90)	3608 (16.05)	6.40 (10.29)	1757	2.18	0.483 (0.294)	14.60 (2.88)	184 (85)	75 (24)	28.90 (97.87)
MAXIMUM POWER IN SELECTED GEARS									
6th (II-2) Gear									
95.84 (71.47)	9279 (41.28)	3.87 (6.23)	2297	9.28	0.527 (0.321)	13.38 (2.63)	189 (87)	60 (16)	28.91 (97.90)
7th (II-3) Gear									
110.10 (82.10)	8874 (39.47)	4.65 (7.49)	2227	9.21	0.503 (0.306)	14.04 (2.77)	187 (86)	64 (18)	28.91 (97.90)
8th (II-4) Gear									
114.18 (85.14)	7201 (32.03)	5.95 (9.57)	2200	5.04	0.481 (0.293)	14.65 (2.89)	188 (87)	65 (18)	28.91 (97.90)
9th (III-1) Gear									
109.55 (81.69)	6301 (28.03)	6.52 (10.49)	2201	4.23	0.485 (0.295)	14.55 (2.87)	187 (86)	68 (20)	28.91 (97.90)
10th (III-2) Gear									
107.50 (80.16)	5093 (22.65)	7.92 (12.74)	2196	3.19	0.483 (0.294)	14.61 (2.88)	187 (86)	69 (21)	28.91 (97.90)
11th (III-4) Gear									
104.34 (77.80)	3948 (17.56)	9.91 (15.95)	2205	2.34	0.492 (0.299)	14.33 (2.82)	186 (86)	72 (22)	28.91 (97.90)

CATEGORY: II, I1IN

Quick Attach: None

Maximum force exerted
through whole range:

Cat II w/assist cylinder

9000 lbs (40.0 kN) (at the frame)
10881 lbs (48.4 kN) (at the hitch points)

Cat I1IN w/assist cylinder

8586 lbs (38.2 kN) (at the frame)
11079 lbs (49.3 kN) (at the hitch points)

i) Opening pressure of relief valve:

NA

one outlet set

2922 psi (202 bar)

two outlet sets combined

2926 psi (202 bar)

ii) Pump delivery rate at minimum pressure
and rated engine speed:


28.5 GPM (107.9 l/min) 28.9 GPM (109.4 l/min)

iii) Pump delivery rate at maximum

hydraulic power: 28.2 GPM (106.7 l/min) 28.1 GPM (106.4 l/min)

Delivery pressure: 2304 psi (159 bar) 2622 psi (181 bar)

Power: 37.9 hp (28.3 kW) 43.0 HP (32.1 kW)

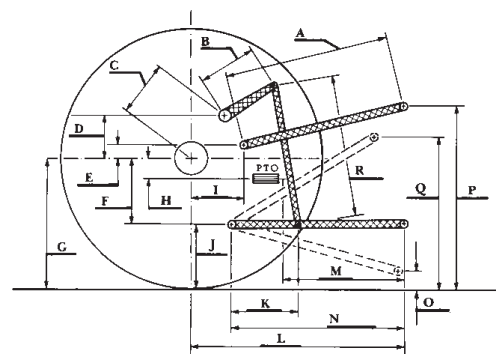

THREE POINT HITCH PERFORMANCE

Observed Maximum Pressure psi. (bar)	2980 (205)
Location:	lift cylinder
Hydraulic oil temperature: °F (°C)	158 (70)
Location:	hydraulic sump
Category:	II, I1IN
Quick attach:	none

Cat II w/assist cylinder

SAE Static Test—System pressure 2565 psi (177 Bar)

Hitch point distance to ground level in. (mm)	8.0 (203)	15.0 (381)	22.0 (559)	29.0 (737)	36.0 (914)
Lift force on frame lb	13878	13464	12789	11529	10949
" " " " " " (kN)	(61.7)	(59.9)	(56.9)	(51.3)	(48.7)

Cat I1IN w/assist cylinder

SAE Static Test—System pressure 2565 psi (177 Bar)

Hitch point distance to ground level in. (mm)	8.0 (203)	16.0 (406)	24.0 (610)	32.0 (813)	40.0 (1016)
Lift force on frame lb	10197	11556	10967	9630	9072
" " " " " " (kN)	(45.4)	(51.4)	(48.8)	(42.8)	(40.4)



McCormick MTX 150 Diesel

Institute of Agriculture and Natural Resources
University of Nebraska—Lincoln

HITCH DIMENSIONS AS TESTED—NO LOAD

Category II

	SAE Test		OECD Test	
	inch	mm	inch	mm
A	29.4	746	30.0	762
B	9.1	230	9.1	230
C	11.9	303	11.9	303
D	6.8	173	6.8	173
E	11.2	284	11.2	284
F	10.0	253	10.0	253
G	33.7	855	33.7	855
H	4.1	105	4.1	105
I	13.5	342	13.5	342
J	23.7	602	23.7	602
K	21.8	554	21.8	554
L	43.9	1114	43.9	1114
M	24.2	614	24.2	614
N	35.1	891	35.1	891
O	8.0	203	8.0	203
P	42.7	1085	47.7	1212
Q	36.7	932	36.7	932
R	25.7	654	25.7	654

HITCH DIMENSIONS AS TESTED—NO LOAD

Category I1IN

	SAE Test		OECD Test	
	inch	mm	inch	mm
A	28.8	730	29.8	756
B	9.1	230	9.1	230
C	11.9	303	11.9	303
D	6.8	173	6.8	173
E	11.2	284	11.2	284
F	10.0	253	10.0	253
G	33.7	855	33.7	855
H	4.1	105	4.1	105
I	13.5	342	13.5	342
J	23.7	602	23.7	602
K	21.8	554	21.8	554
L	43.9	1114	43.9	1114
M	24.2	614	24.2	614
N	35.1	891	35.1	891
O	8.0	203	9.0	229
P	45.7	1160	50.7	1287
Q	36.7	932	37.5	951
R	25.7	654	25.3	641