4-18-2020

Biological Systems Engineering

Asmaa Abdella
University of Sadat City & University of Nebraska-Lincoln

Fernando Segato
University of São Paulo

Mark R. Wilkins
University of Nebraska - Lincoln, mwilkins3@unl.edu

Biotechnology Reports xxx (2019) xxx–xxx

Contents lists available at ScienceDirect

Biotechnology Reports

journal homepage: www.elsevier.com/locate/btre

Optimization of process parameters and fermentation strategy for xylanase production in a stirred tank reactor using a mutant *Aspergillus nidulans* strain

Asmaa Abdella[a,b,c], Fernando Segato[d], Mark R. Wilkins[b,c,e,*]

[a] Department of Industrial Biotechnology, Genetic Engineering and Biotechnology Research Institute, University of Sadat City, PO Box 79, Sadat City, 22857 Egypt
[b] Department of Biological Systems Engineering, University of Nebraska-Lincoln, 3605 Fair Street, Lincoln, NE, 68583-0726 USA
[c] Industrial Agricultural Products Center, University of Nebraska-Lincoln, 3605 Fair Street, Lincoln, NE, 68583-0730 USA
[d] Synthetic and Molecular Biology Laboratory, Department of Biotechnology, Lorena School of Engineering, University of São Paulo, Estrada Municipal do Campinho, s/n, Lorena, SP, Brazil
[e] Department of Food Science and Technology, 1901 N 21stSt. University of Nebraska-Lincoln, Lincoln, NE, 68588-6205 USA

ARTICLE INFO

Article history:
Received 27 January 2020
Received in revised form 27 March 2020
Accepted 18 April 2020

Keywords:
Xylanase
Enzyme
Fed batch
Repeated batch
Optimization

ABSTRACT

The present work studied the optimization of aeration rate, agitation rate and oxygen transfer and the use of various batch fermentation strategies for xylanase production from a recombinant *Aspergillus nidulans* strain in a 3 L stirred tank reactor. Maximum xylanase production of 1250 U/mL with productivity of 313 U/mL/day was obtained under an aeration rate of 2 vvm and an agitation rate of 400 rpm using batch fermentation. The optimum volumetric oxygen transfer coefficient (k_La) for efficient xylanase production was found to be 38.6 h^{-1}. Fed batch mode and repeated batch fermentation was also performed with k_La was 38.6 h^{-1}. Xylanase enzyme productivity increased to 327 with fed batch fermentation and 373 U/mL/day with repeated batch fermentation. Also, maximum xylanase activity increased to 1410 U/mL with fed batch fermentation and 1572 U/mL with repeated batch fermentation.

1. Introduction

Xylanases are a class of enzymes that catalyze hydrolysis of xylan, which is a major component of hemicellulose [1]. Xylanases have many crucial applications in industry ranging from food processing to biofuel production [2–7]. Many operation parameters, such as agitation, aeration, temperature and dissolved oxygen concentration must be investigated and optimized to maximize xylanase production from fungi, the major source of xylanases [8]. Agitation and aeration are the most crucial process parameters as they both affect oxygen transfer to cells, which is a decisive factor in the scale up of aerobic fermentation [9]. Oxygen transfer is related to oxygen solubility and diffusion into the broth [10]. Aeration efficiency can be increased by increasing agitation. Proper agitation results in an increase of the gas liquid interface area by disintegrating large air bubbles into many small ones. Agitation also breaks apart mycelial aggregates and thus increases oxygen diffusion into cells [11].

Several previous reports have described production and characterization of an endo-beta-1,4-xylanase from the family GH10 from *Aspergillus fumigatus* var *niveus*, also referred to as AFUMN-GH10 [12–15] by a recombinant *Aspergillus nidulans* strain. Using a recombinant enzyme producing strain often results in easier and more economical purification steps since recombinant strains often only excrete a single protein [16]. Xylanase production by the *A. nidulans* strain was comparable to other xylanase producers [13], and the strain excreted only xylanase [12].

In the *A. nidulans* strain mentioned above, a maltose-induced promoter was used to initiate and promote xylanase production [12]. Maltose is also the carbon source the strain used for protein production; thus, maltose could be subject to substrate inhibition. One cell cultivation method developed to overcome substrate inhibition is fed batch fermentation. Fed batch fermentation involves an initial batch period followed by addition of fresh medium to the reactor until the maximum volume of the reactor is reached. This strategy allows nutrient feeding to be controlled according to metabolic change as expressed as variation in pH, DO % and substrate and by-products concentrations [17–19]. A modification of fed batch strategy, repeated batch fermentation, involves withdrawing part of the old media and replacing it with fresh media to replenish used substrates while keeping the same

* Corresponding author at: University of Nebraska-Lincoln, 211 Chase Hall, PO Box 830726, Lincoln, NE, 68583-0726 USA.
E-mail address: mwilkins3@unl.edu (M.R. Wilkins).

https://doi.org/10.1016/j.btre.2020.e00457

volume [20]. Repeated batch mode increased productivity in a previous xylanase production study compared with batch and fed batch modes [21].

This study aimed to optimize and scale up xylanase production from a recombinant *Aspergillus nidulans* strain with a pyridoxine marker [12] in a stirred tank reactor (STR). The effect of aeration, agitation, and volumetric oxygen mass transfer coefficient (k_La) on xylanase production were investigated. Xylanase activities and productivities for the fed batch process and repeated batch process were compared to those from batch fermentation to determine if these strategies could improve the amount of xylanase activity produced and xylanase productivity.

2. Materials and methods

2.1. Microbial strains, plasmids

A. nidulans strain A773 (*pyrG89*; *wA3*; *pyroA4*) was obtained from Fungal Genetic Stock Center (FGSC, Manhattan, KS, USA). This strain is unable to synthesize pyridoxine [22]. The strain was modified as described in [23] to express AFUMN-GH10 [12,13,16,24]. The plasmid used for transformation included a glucoamylase promoter induced by maltose, which allowed overexpression and secretion of AFUMN-GH10 into the media, followed by a tryptophan terminator (*trpCt*) [23].

2.2. Inoculum preparation

Spores kept in fungal stock solution (20 % glycerol, 10 % lactose) at −80 °C were thawed and 20 μl were distributed onto a Petri dish containing potato dextrose agar media. Petri dishes were incubated at 37 °C for 2 days. The spores were scraped from the plate and added to 10 mL

of distilled water, giving a final concentration of 4×10^8 spores/mL in the spore inoculum [25]

Cell pellets were prepared by inoculating 0.5 mL spore suspension into 250 mL Erlenmeyer flasks containing 50 mL of preculture media containing glucose, 10; $NaNO_3$, 12; KCl, 2; $MgSO_4$, 0.5; KH_2PO_4, 1.5; 1 mL/L 1000× trace element solution (22 g/L $ZnSO_4.7H_2O$, 11 g/L H_3BO_3, 5.0 g/L $MnCl_2.7H_2O$, 5.0 g/L $FeSO_4.7H_2O$, 1.6 g/L $CoCl_2.5H_2O$, 1.6 g/L $CuSO_4.5H_2O$, 1.1 g/L $Na_2MoO_4.4H_2O$, 50 g/L Na_2-EDTA) and 1 mg/L pyridoxine. The inoculated flasks were incubated in an orbital shaker at 37 °C and 225 rpm for 2 days [13].

2.3. Fermentation in a STR

Batch fermentation kinetics were studied in a 3 L STR (Eppendorf BioFlo 115, Hauppage, NY, USA) with a 1.98:1 height: diameter ratio containing 1.5 L of fermentation medium. The fermentation medium has the same composition as the preculture medium plus 120 g/L maltose. Silicone antifoam 204 (Sigma-Aldrich, St. Louis, MO, USA) was added to control foaming. The initial pH was adjusted to 6.5 with 1 M NaOH before autoclaving. A heat sterilizable polarographic oxygen electrode (Mettler Toledo, Columbus, OH, USA) was used to measure dissolved oxygen concentration. Media addition or removal was controlled using a level probe (2 L foam/level sensor kit, Eppendorf). After autoclaving the vessel containing medium at 121 °C, 204.7 kPa for 30 min, the STR was inoculated with 150 mL of pre-culture medium (cell pellets) and operated at 37 °C. To evaluate effect of aeration rate, three runs were conducted using an agitation rate of 400 rpm and an aeration rate 0.5, 1.0 or 2 vvm. To evaluate agitation rate, three runs were conduted using an aeration rate of 2 vvm and an agitation rate of 200, 400 or 600 rpm. Samples were taken daily, centrifuged at 13,000 rpm for 10 min, and used for analysis.

For fed batch fermentation, 500 mL of medium containing 180 g/L maltose and 5 g/L glucose was pulse-fed to 1 L media when enzyme activity started to decrease at both 144 and 240 h. For repeated batch fermentation, 1 L of an initial 1.5 L of fermentation broth was replaced with fresh medium containing 180 g/L maltose and 10 g/L glucose at 144 and 264 h. These times were chosen because enzyme concentration ceased increasing at these times. The agitation speed was 400 rpm and the aeration rate was 2 vvm for both fed batch and repeated batch fermentation.

2.4. Volumetric oxygen transfer coefficient (k_La) measurement

The unsteady-state method was used to measure k_La in cell free media [20,26]. Nitrogen was sparged into media until dissolved oxygen concentration became zero and then air was sparged until media was saturated with oxygen. Dissolved oxygen concentration variation with time, t, was recorded and k_La was calculated according to the following equation:

$$\ln (C^* - C_L) = \ln (C^* - C^0) - k_La \cdot t \quad (1)$$

where C^* was saturated dissolved oxygen concentration in liquid phase (mmol/L), C_L was oxygen concentration in liquid phase (mmol/L), C^0 was oxygen concentration at t = 0 (mmol/L) (which equaled 0 since all oxygen was purged from the media) and k_La was oxygen transfer coefficient (h^{-1}). The k_La was determined by plotting $\ln (C^* - C)$ against time (t) and determining the slope of the resulting line, which equaled $-k_La$.

2.5. Analytical methods and determination of fermentation parameters

Xylanase activity was assayed using beechwood xylan (TCI America, Portland, OR, USA). 0.95 mL of a 1% (w/v) xylan solution in 0.05 M citrate buffer (pH 5) was incubated with 0.05 mL of fermentation medium at 50 °C for 15 min. The reaction was stopped by adding 0.5 mL of DNS reagent to the assay contents. The contents were then boiled in a water bath for 5 min and cooled to room temperature. The absorbance of the assay contents was measured at 575 nm and compared to a substrate control without fermentation medium [27] to determine the amount of reducing sugar in the solution. One international unit (U) of xylanase activity corresponded to the amount of enzyme that catalyzed the release of 1 μmol/min of reducing sugar under the specified assay condition.

Dry cell weight measurements were conducted by filtering a known volume of fermentation medium through a pre-weighed filter (P8 Fisherbrand, Fisher Scientific, Hampton, NH, USA). The filter was then washed with distilled water and dried to constant weight at 60 °C. The remaining cell mass on the filter was determined using an analytical balance. Total protein concentration was assayed using the method described in [28]. Maltose and glucose were determined by HPLC (Dionex Ultimate 3000, Thermo Scientific, Waltham, MA, USA) on an HPX-87 P column (300 mm × 7.8 mm). The eluent was HPLC grade DI-water with a flow rate of 0.6 mL/min at 80 °C. Sugars were measured by a refractive index detector (Shodex RI-101, Tokyo, Japan) and the concentrations were quantified based on a four-level calibration curve of known standards [29]. All assays were performed in triplicate.

3. Results and discussion

3.1. Effect of different aeration rates on xylanase production

Fig. 1 shows the fermentation kinetics for batch fermentation at 400 rpm and different aeration rates (0.5, 1 and 2 vvm). Increasing

Please cite this article in press as: A. Abdella, et al., Optimization of process parameters and fermentation strategy for xylanase production in a stirred tank reactor using a mutant *Aspergillus nidulans* strain, Biotechnol. Rep. (2020), https://doi.org/10.1016/j.btre.2020.e00457

aeration rate resulted in increased rates of substrate and oxygen consumption and protein and xylanase production. There was more change in fermentation media pH during the growth phase as aeration rates increased. At 48 h pH changed from an initial value of 6.00–5.89, 7.00 and 7.54 with aeration rates of 0.5, 1 and 2 vvm, respectively. This is explained by higher growth and higher metabolism rates at higher aeration rates [30,31]. At the end of fermentation, the recorded pH was 5.70, 6.02 and 6.50 at 0.5, 1 and 2 vvm, respectively. DO% at 24 h was 9, 15 and 26 % at 0.5, 1 and 2 vvm, respectively, and then decreased at 48 h to 3, 1.5 and 0.3 % at 0.5, 1 and 2 vvm, respectively. DO% increased during the stationary and death phases to 4, 7 and 9% at 0.5, 1 and 2 vvm, respectively, at the end of fermentation (Fig. 1A).

Maximum xylanase activities and total protein concentrations were observed at 96 h. Xylanase activities and protein concentrations increased as aeration rate increased. Maximum xylanase activities of 520, 887 and 1250 IU/mL and maximum total protein concentrations of 120, 214 and 300 μg/mL were observed at 0.5, 1 and 2 vvm, respectively (Fig. 1B). The sum of the residual maltose and glucose concentrations at the end of fermentation decreased as aeration rate increased and were 98, 38 and 26 g/L at 0.5, 1 and 2 vvm, respectively (Fig. 1C). An increase in aeration rate generally would enhance the DO level in the growth phase, resulting in an increase cell growth and xylanase production. While cell growth was not measured here, increased xylanase activities and protein concentrations were

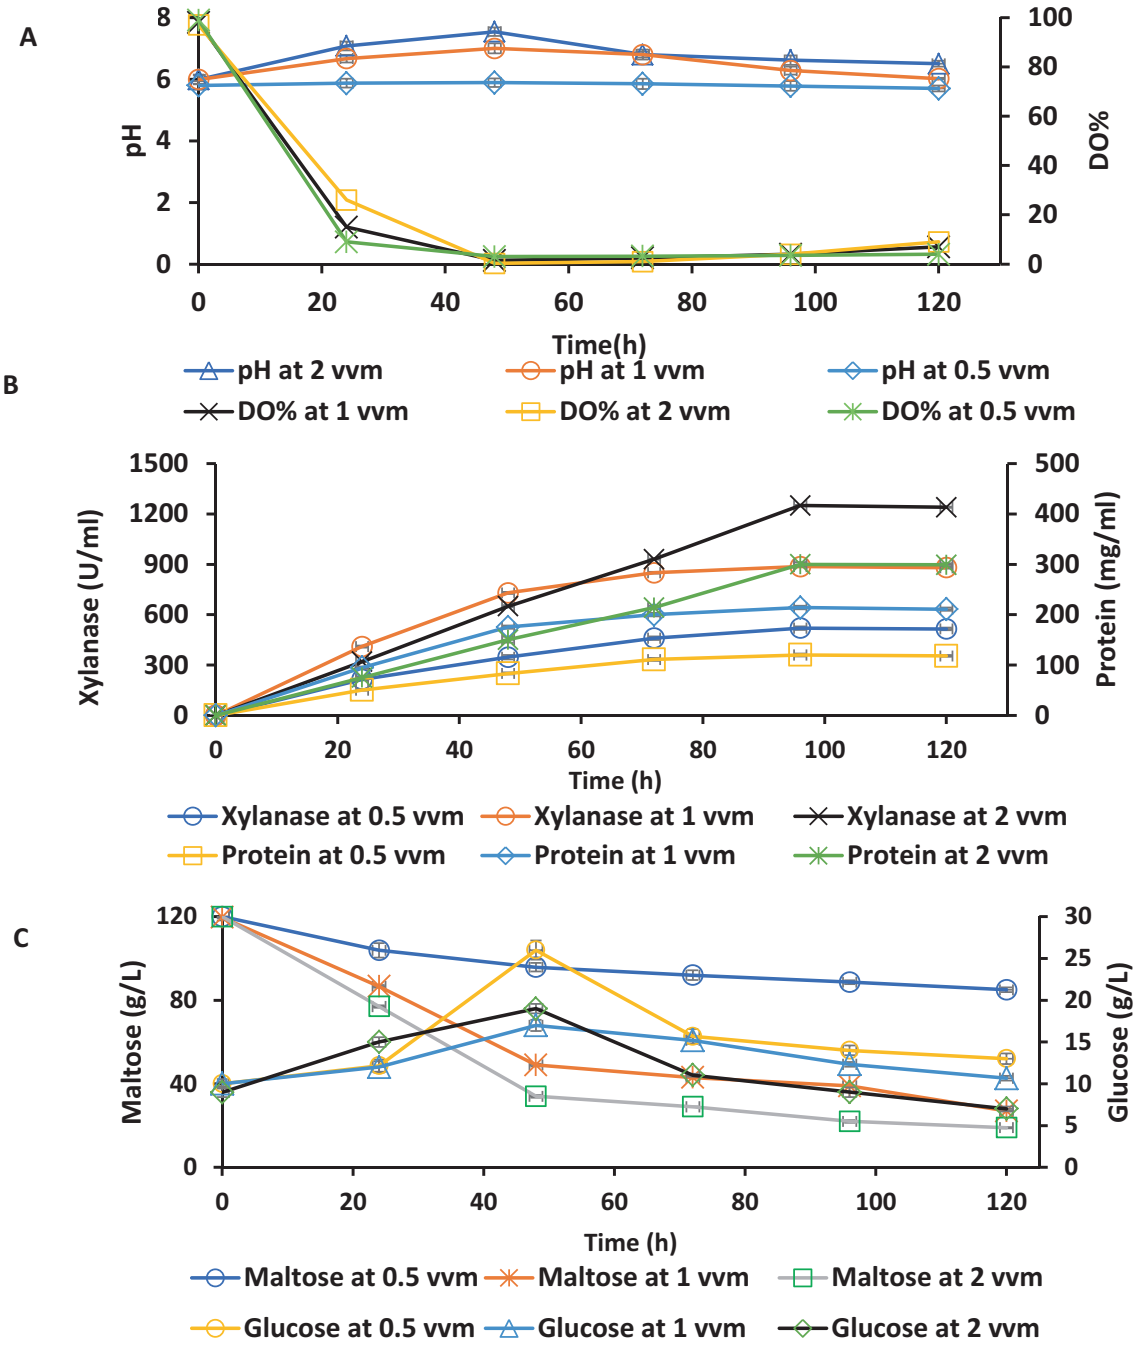

Fig. 1. Effects of aeration rate on (A) pH and dissolved oxygen (DO), (B) xylanase activity and protein concentration, and (C) maltose and glucose concentrations during fermentation of *A. nidulans* in a stirred-tank bioreactor inoculated with cell pellets with agitation speed at 400 rpm.

Please cite this article in press as: A. Abdella, et al., Optimization of process parameters and fermentation strategy for xylanase production in a stirred tank reactor using a mutant *Aspergillus nidulans* strain, Biotechnol. Rep. (2020), https://doi.org/10.1016/j.btre.2020.e00457

observed when more oxygen was supplied to the fermenter. DO is one of the most important factors in aerobic fermentation, and any change in DO% can result in considerable changes in cell physiology and metabolism [33]. Previous studies also stated that increasing aeration rate significantly increased xylanase production by *Aspergillus niger* [30,34,35].

3.2. Effect of different agitation rates on xylanase production

Agitation is considered one of the most vital parameters for fermentation conducted in STRs since it controls transfer of oxygen, heat and nutrients from the medium to the microorganism's cells, fragments air into small bubbles to improve gas-liquid contact and prevents mycelia from clumping [9,11,36]. During the first 48 h, the highest pH value of 7.54 was recorded for agitation of 400 rpm followed by 7.15 with 600 rpm and 6.80 for 200 rpm. At the end of fermentation, the recorded pH values were 5.93, 6.50 and 6.17 for 200, 400 and 600 rpm, respectively. DO% at 24 h increased with increasing agitation speed. During the first 24 h, DO% was 18, 26 and 39 % for 200, 400 and 600 rpm, respectively. From 24–48 h, DO% decreased to 4, 0.3 and 2% for 200, 400 and 600 rpm respectively, then from 48 h to the end of the fermentation, DO% increased to 6, 9 and 12 % for 200, 400 and 600 rpm, respectively (Fig. 2A**).**

Maximum xylanase activities and total protein concentrations were observed at 96 h, which was also observed in the fermentations conducted to study effect of aeration rate. Fig. 2**B** shows that at an agitation speed of 400 rpm, maximum xylanase production was 1250 IU/mL and maximum protein concentration was 300 μg/mL. When agitation rate was increased to 600 rpm, maximum xylanase activity decreased to 995 U/mL and maximum protein concentration decreased to 230 μg/mL. Increase in agitation speeds can cause high shear stress that leads to mycelial rupture destruction of cellular structures which decreases both mycelial growth and enzyme production [37–39]. The lowest enzyme activity of 750 U/mL and the lowest protein concentration of 165 μg/mL were observed at 200 rpm. Lower agitation rates result in reduced mixing in the medium and lower oxygen supply to the microorganism. Ghoshal et al. [32] also observed that decreased agitation rate decreased both fungal growth and enzyme production. Bandaiphet and Prasertsan [40] observed that decreased agitation rate resulted in increased media viscosity and decreased mass transfer. Residual substrate (maltose + glucose) concentrations at the end of fermentation were 39 g/L, 26 g/L and 33 g/L at 200, 400 and 600 rpm, respectively, which supported the observed trend in xylanase activity and protein concentration with lower residual substrate corresponding to higher xylanase activity and protein concentration (Fig. 2C**).**

3.3. Effects of agitation and aeration on k_La

Determination of oxygen transfer inside the STR was carried out by measurement of k_La. k_La can be improved by increasing aeration and/or agitation, but only to a certain limit due to the harmful effect of high shear stress [41]. The effect of different agitation speeds and aeration rates on k_La is demonstrated in Fig. 3. The increase of both parameters, in all cases, led to an increase in k_La. Fig. 3**A** shows that an aeration rate of 0.5 vvm resulted in k_La values of 5.35, 19.29 and 43.19 h^{-1} at agitation rates of 200, 400 and 600 rpm, respectively. An aeration rate of 1 vvm resulted in k_La values 7.60, 28.93 and 50.78 h^{-1} at agitation rates of 200, 400 and 600 rpm, respectively, and an aeration rate of 2 vvm resulted in k_La values 10.64, 38.55 and 65.19 h^{-1} at agitation rates of 200, 400 and 600 rpm, respectively.

A increase in k_La due to increase of agitation speed was much greater than increase in k_La due to increase of aeration rate; thus, agitation was more effective than aeration for increasing k_La in the reactor used in this study. The recorded k_La at the lowest aeration rate and highest agitation speed, 43.19 h^{-1}, was greater than that recorded at the lowest agitation speed and highest aeration rate 10.64 h^{-1}. The results are similar to those reported by Fenice et al. [41].

3.4. Relationship between k_La and production of xylanase

In aerobic fermentation oxygen transfer to microbial cells has a significant effect on product formation, which makes k_La an essential parameter to be evaluated in STRs [35]. The highest xylanase activity of 1250 U/mL was attained at k_La of 38.55 h^{-1} where the agitation rate was 400 rpm and the aeration rate was 2 vvm. Increasing kLa from 10.64 h^{-1} at 2 vvm, 200 rpm to 38.55 h^{-1} at 400 rpm lead to an 166 % increase in xylanase activity. At 200 rpm, the stirrer did not load the air flow resulting in low air dispersion and low dissolved oxygen concentration for fungal growth and xylanase production [9,41]. Further, increasing k_La from 38.55 h^{-1} at 400 rpm to 65.19 h^{-1} at 600 rpm reduced xylanase activity from 1250 U/mL to 995 U/mL. This could be explained by the high shear stress in case of high agitation speed, as discussed above.

3.5. Fed batch fermentation

Fed-batch fermentation was conducted by adding fresh medium containing maltose and glucose at 144 and 240 h. Fig. 4**A** shows fermentation profiles for 13 days in a STR inoculated with cell pellets. The pH increased from 5.95 initially to 7.25 at 48 h and then decreased to 6.41 at 120 h. After addition of fresh medium at 144 h, pH was 6.12 then increased to 6.29 at 168 h, after which pH decreased to 5.72 at 216 h. After the second addition of media at 240 h, pH increased again to 6.19 and then to 6.32 at 264 h, after which pH decreased to 5.86 at the end of fermentation. DO was not controlled and decreased from 99 % initially to 0.5 % after 48 h, then increased to 9.3 % at 144 h. After media addition at 144 h, DO decreased to 5.2 % at 168 h, then increased again to 8.0 % at 240 h. After the second media addition at 240 h, DO decreased to 6.1 % at 264 h and then increased to 7.0 % at the end of fermentation. Dos Reis et al. [42] also reported decrease of oxygen concentration after the addition of cellulose during fed batch production of xylanase by *Penicillium echinulatum*. This is due to the recovery of microorganism growth after fresh media addition, which increased oxygen consumption and decreased DO%.

From Fig. 4**B** we can conclude that xylanase and protein production started after 24 h and reached maximum values of 1193 U/mL and 320 μg/mL, respectively, at 96 h. Xylanase productivity was 298 U/mL/d, which was similar to the productivity observed in batch fermentation (313 U/mL/d). After addition of fresh medium at 144 h, xylanase activity and protein concentration decreased to 760 U/mL and 225 μg/mL, respectively, due to dilution. Activity then increased to 1413 U/mL and protein concentration increased to 403 μg/mL at 192 h as fresh nutrients were consumed, resulting in a xylanase productivity of 327 U/mL/d from 96 to 192 h. After the second media addition at 240 h, xylanase activity decreased to 1000 U/mL and protein concentration decreased to 310 μg/mL. Xylanase activity increased to 1300 U/mL and protein concentration increased to 390 μg/mL at 298 h, resulting in a xylanase productivity of 150 U/mL/d from 240 to 298 h.

Maltose concentration decreased from the initial 120.0 g/L to 15.0 g/L at 120 h. After addition of fresh medium at 144 h, maltose increased to 70.0 g/L, and then decreased to 14.1 g/L at 216 h. After the second addition of media at 240 h, maltose concentration

Please cite this article in press as: A. Abdella, et al., Optimization of process parameters and fermentation strategy for xylanase production in a stirred tank reactor using a mutant *Aspergillus nidulans* strain, Biotechnol. Rep. (2020), https://doi.org/10.1016/j.btre.2020.e00457

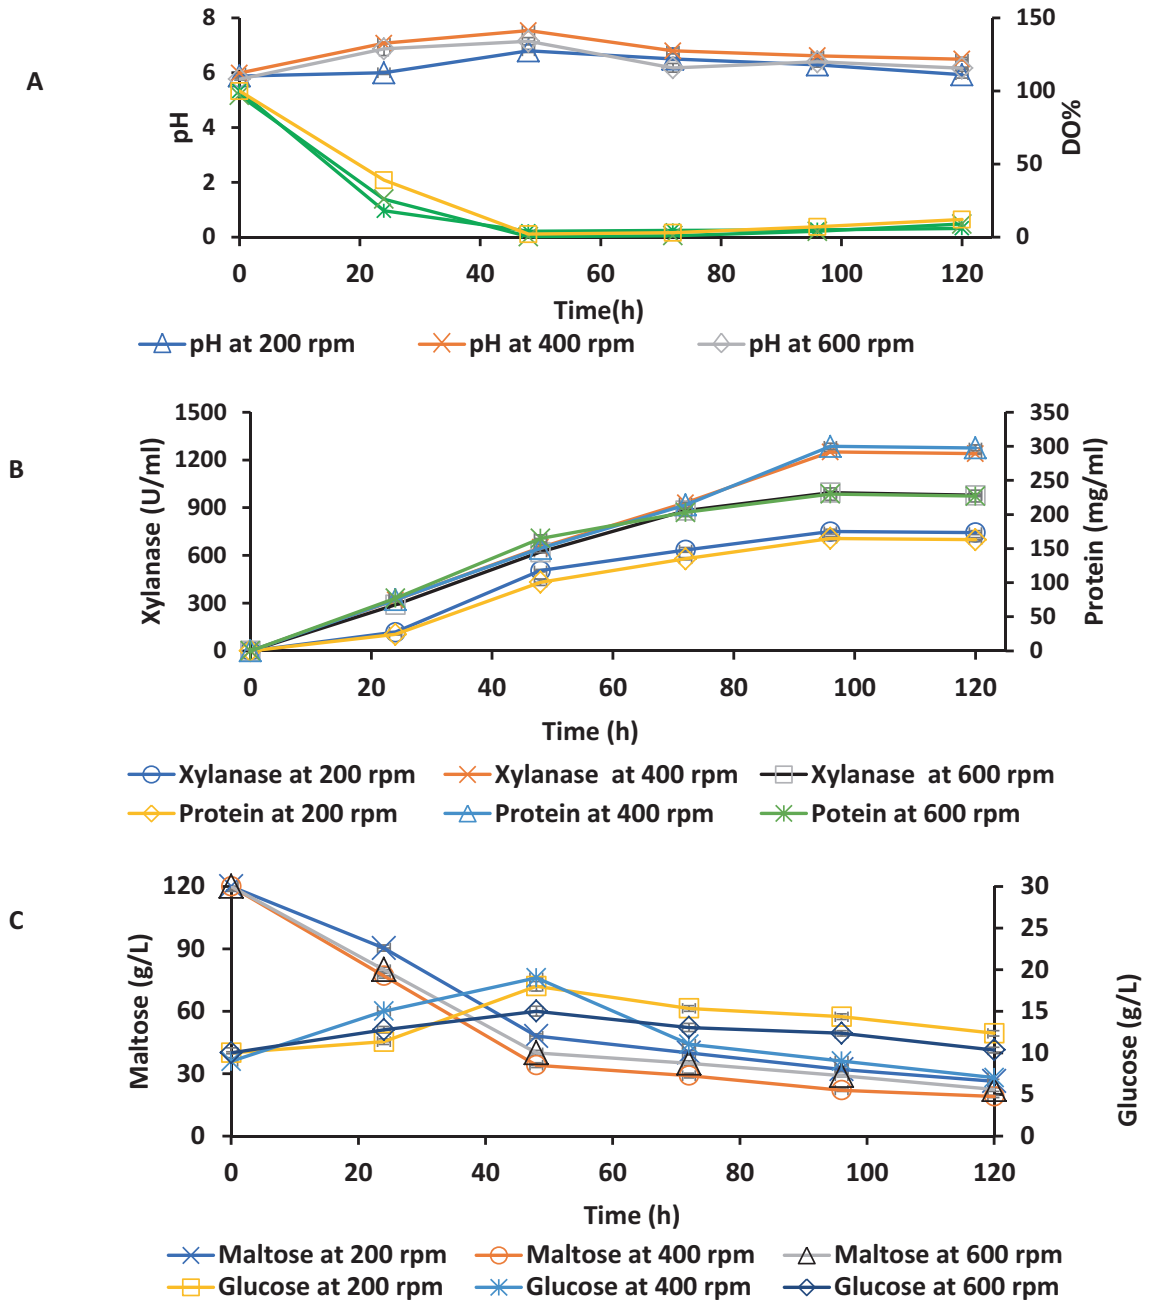

Fig. 2. Effects of agitation speed on (A) pH and dissolved oxygen (DO), (B) xylanase activity and protein concentration, and (C) maltose and glucose concentrations during fermentation of *A. nidulans* in a stirred-tank bioreactor inoculated with cell pellets with aeration rate at 2 vvm.

increased to 69.0 g/L, and then decreased to 13.8 g/L at the end of fermentation. Glucose concentration increased from 9.0 g/L at the beginning of fermentation to 18.2 g/L at 48 h due to hydrolysis of maltose by the fungus, then decreased to 8.0 g/L at 120 h [43]. After addition of fresh media at 144 h, glucose increased to 9.6 g/L, increased further to 18.1 g/L at 192 h, then decreased to 13.0 g/L at 216 h. After the second addition of media at 240 h, glucose increased to 14.8 g/L and then increased to 18.8 g/L at 264 h, reaching a value of 12.0 g/L at the end of fermentation (Fig. 4C).

3.6. Repeated batch fermentation

An increase in cell density and enzyme productivity has been shown previously in repeated batch fermentation [21]. This technique is cost effective because productivity and yield can be improved compared to other fermentation modes [44]. To improve enzyme production, fresh media containing maltose and glucose replaced the same volume of old media at set points during batch fermentation (144 and 264 h) that were chosen based on cessation of enzyme production. Fig. 5A shows the fermentation profiles over 14 days in a STR inoculated with cell pellets. The pH increased from 5.87 initially to 7.47 at 48 h and then decreased to 6.26 at 120 h. After the first media replacement at 144 h, pH was 6.00, which increased to 6.17 at 168 h and then decreased to 5.57 at 240 h. After the second media replacement at 264 h, pH was 6.05, increased to 6.15 at 288 h and finally decreased to 5.39 at the end of fermentation. DO was not controlled and decreased rapidly from 100 % initially to 0.6 % at 48 h, then DO increased to 9.0 % at 120 h.

Please cite this article in press as: A. Abdella, et al., Optimization of process parameters and fermentation strategy for xylanase production in a stirred tank reactor using a mutant *Aspergillus nidulans* strain, Biotechnol. Rep. (2020), https://doi.org/10.1016/j.btre.2020.e00457

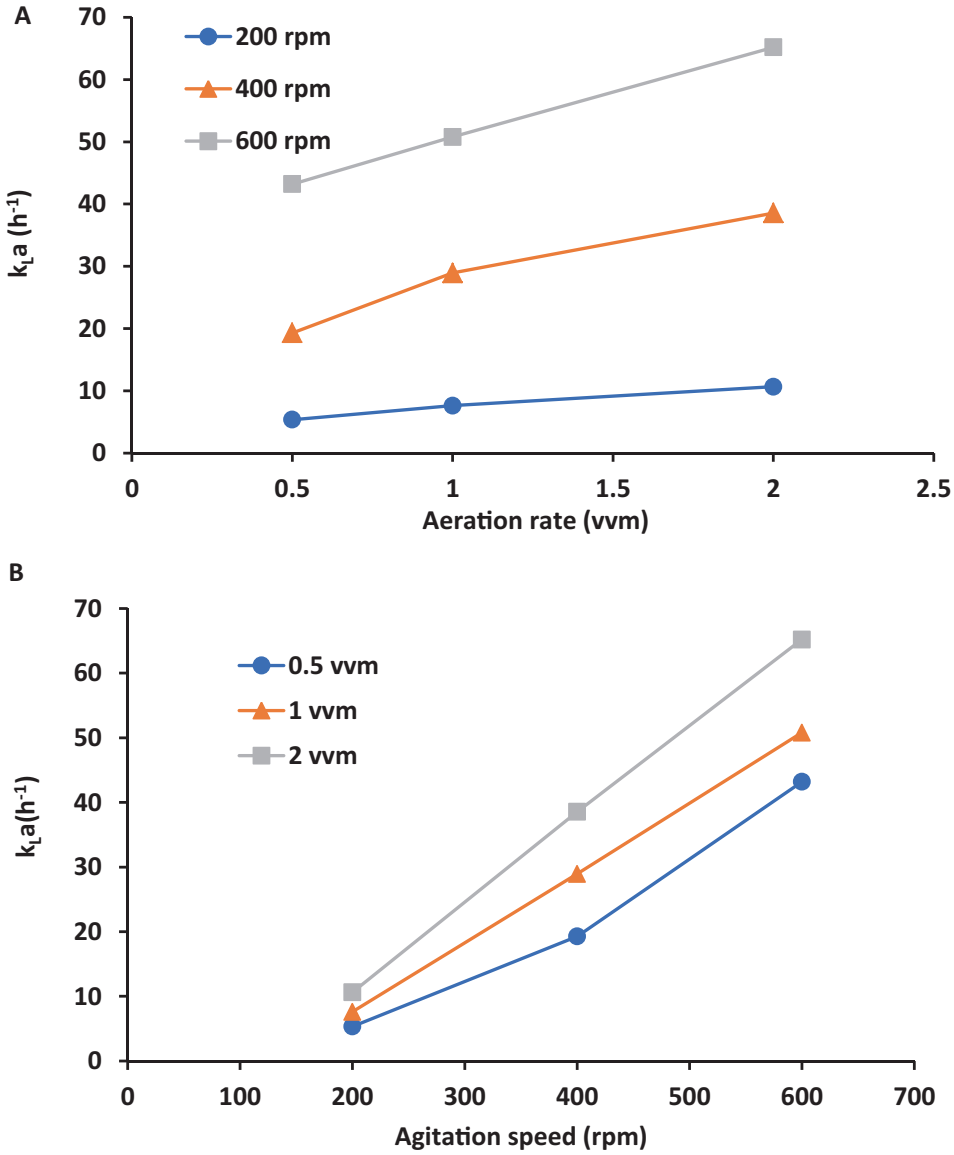

Fig. 3. (A) Effect of aeration rate on the volumetric mass transfer coefficient k_La at different agitation speeds and (B) effect of agitation speed on the volumetric mass transfer coefficient k_La at different aeration rates.

After the first media replacement at 144 h, DO decreased to 4.6 % at 168 h, then increased again to 9.1 % at 240 h. After second media replacement at 264 h, DO decreased to 5.9 % at 288 h and then increased to 8.1 % at the end of fermentation.

Maximum values of xylanase activity and protein concentration were 1260 U/mL and 315 μg/mL, respectively, at 96 h for a xylanase productivity of 315 U/mL/day, which was similar to the xylanase productivities observed during batch fermentation and the initial batch phase of fed batch fermentation. After the first media replacement at 144 h, xylanase activity and protein concentration decreased to 453 U/mL and 120 μg/mL, respectively, due to dilution. At 216 h xylanase activity increased to 1571 U/mL and protein concentration increased to 381 μg/mL, which resulted in a xylanase productivity of 373 U/mL/day from 144 h to 216 h. After the second media replacement at 264 h, xylanase activity and protein concentration decreased to 610 U/mL and 139 μg/mL, respectively. At 312 h, xylanase activity increased to 870 U/mL and protein concentration increased to 183 μg/mL, resulting in a xylanase productivity of 130 U/mL/d from 264 h to 312 h.

Maltose concentration decreased from an initial value of 119.3 g/L to 18.3 g/L at 120 h. After the first media replacement at 144 h, maltose concentration was 125.0 g/L, which decreased to 18.0 g/L at 240 h. After the second media replacement at 264 h, maltose concentration was 120.7 g/L, which then decreased to 22.0 g/L at the end of fermentation. Glucose concentration increased from the initial 9.5 g/L to 17.1 g/L at 48 h due to hydrolysis of maltose, and then decreased to 9.0 g/L at 120 h. After the first media replacement at 144 h, glucose was 15.0 g/L and increased further to 22.0 g/L at 192 h due to maltose hydrolysis, and then decreased to 14.0 g/L at 240 h. After the second media replacement at 264 h, glucose concentration was 17.0 g/L, increased to 22.2 g/L at 288 h due to maltose hydrolysis, and then decreased to 16.1 g/L at the end of fermentation (Fig. 5C).

Please cite this article in press as: A. Abdella, et al., Optimization of process parameters and fermentation strategy for xylanase production in a stirred tank reactor using a mutant *Aspergillus nidulans* strain, Biotechnol. Rep. (2020), https://doi.org/10.1016/j.btre.2020.e00457

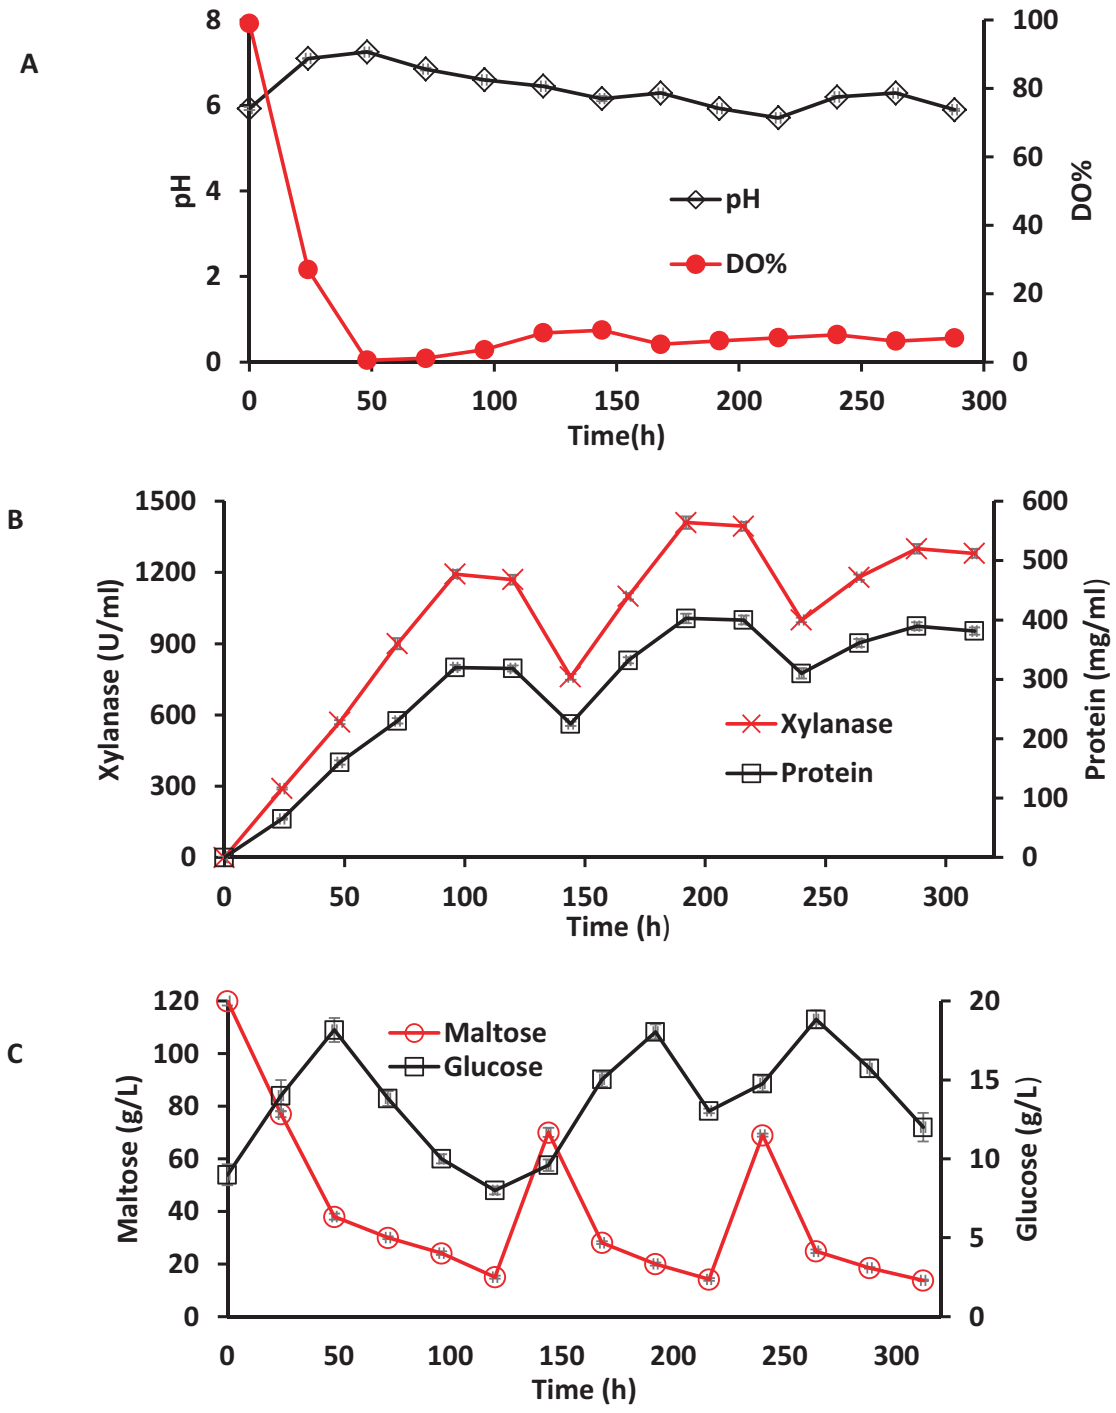

Fig. 4. Fed-batch fermentation kinetics of *A. nidulans* in a stirred-tank bioreactor inoculated with cell pellets at 400 rpm and 2 vvm. (A) pH and dissolved oxygen (DO); (B) xylanase activity and protein concentration; (C) maltose and glucose concentrations.

3.7. Comparison between different modes of fermentation

The xylanase activity and productivity from different fermentation modes are displayed in Table 1. Xylanase productivities were similar after the first 96 h for all fermentation modes conducted under the same aeration rate (2 vvm) and agitation speed (400 rpm). The mean xylanase activity was 1233 U/mL with a standard deviation of 33 U/mL for the first 96 h of batch fermentation at 2 vvm and 400 rpm, fed batch fermentation and repeated batch fermentation. The mean xylanase productivity for these three fermentations was 309 U/mL/d with a standard deviation of 9 U/mL/d. No additional xylanase activity or protein was produced after 96 h in any of the fermentations. During the second phase of fed batch fermentation, which started when additional media was added at 144 h, a xylanase productivity of 327 U/mL/d was observed, which was a 6% increase compared to

Please cite this article in press as: A. Abdella, et al., Optimization of process parameters and fermentation strategy for xylanase production in a stirred tank reactor using a mutant *Aspergillus nidulans* strain, Biotechnol. Rep. (2020), https://doi.org/10.1016/j.btre.2020.e00457

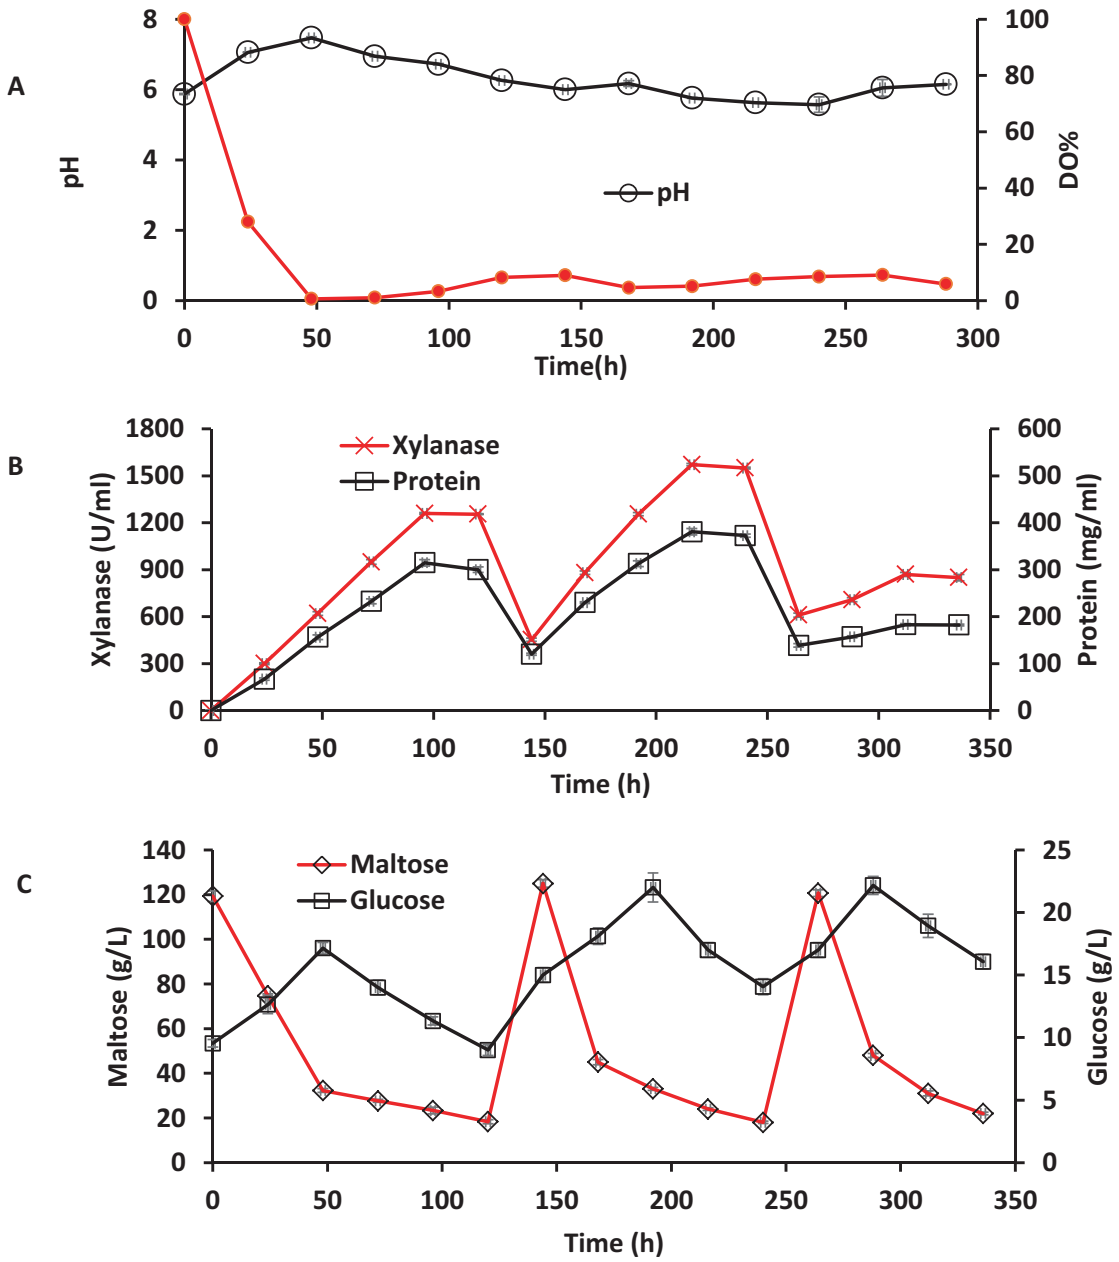

Fig. 5. Repeated-batch fermentation kinetics of *A. nidulans* in a stirred-tank bioreactor inoculated with cell pellets at 400 rpm and 2 vvm. (A) pH and dissolved oxygen (DO); (B) xylanase activity and protein concentration; (C) maltose and glucose concentrations.

the initial batch period productivity. During the second phase of fed batch fermentation, which started when media was replaced at 168 h, a xylanase productivity of 373 U/mL/d was observed, which was a 21 % increase compared to the initial batch period productivity and a 14 % increase compared to the second phase of fed batch fermentation. Shang et al. [19] reported that fed batch fermentation increased productivity of xylanase production by *Pichia pastoris*. Dos Reis et al. [42] also reported that the maximum activity of a xylanase from *Penicillium echinulatum* was obtained under fed batch mode. Techapun et al. [45] reported that repeated batch fermentation mode increased productivity of a xylanase from by *Streptomyces* Ab 106. In future work with the *A. nidulans* AFUMN-GH10 strain, the second phase of either fed batch or repeated batch fermentation should be started at 96 h since no additional xylanase activity was produced after the first 96 h. Also, a second media addition or replacement should not be done for either repeated batch or fed batch fermentation as productivity decreased greatly after the second media addition in fed batch and the second media replacement in repeated batch (Table 2).

Many bacteria, yeasts and filamentous fungi can produce xylanases [19,46,47]. Among the filamentous fungi, the genus *Aspergillus* is considered the best for xylanase production [35,48,49]. In this study, a xylanase was produced by recombinant *A. nidulans* in a STR under repeated batch mode showing a high xylanase activity 1571 u/mL and productivity of 373 U/mL/d when

Please cite this article in press as: A. Abdella, et al., Optimization of process parameters and fermentation strategy for xylanase production in a stirred tank reactor using a mutant *Aspergillus nidulans* strain, Biotechnol. Rep. (2020), https://doi.org/10.1016/j.btre.2020.e00457

Table 1
Comparison of xylanase production by *A. nidulans* in a STR operated in different modes.

Fermentation mode	Enzyme activity (U/mL)	Enzyme productivity (U/mL/day)
Batch	1250	313
0 to 96 h		
Fed Batch	1193	298
1st 96 h	1410	327
144 to 192 h	1300	150
240 to 288 h		
Repeated Batch	1260	315
0 to 96 h	1572	373
168 to 192 h	870	130
268 to 312 h		

Table 2
Comparison of xylanase enzyme production in different bioreactors by Aspergillus and other microorganisms under different modes of fermentation.

Microorganism	Type of reactor	Fermentation mode	Xylanase Activity (U/mL)	Productivity (U/mL/day)	Reference
Aspergillus nidulans	STR	Repeated Batch	1571	373	This study
Penicillum citrinum	STR	Batch	299.51	74.87	[32]
Pichia pastoris	STR	Fed batch	560.7	140.17	[19]
Bacillus subtilis	STR	Batch	300	240	[47]
Aspergillus niger	STR	Continuous	182	45.5	[50]
A. niger	airlift	Batch	7	1.4	[35]
A. niger KKS	Bubble column	Batch	91	18.2	[51]
Streptomyces sp. Ab106	STR	Repeated batch	32	6.4	[47]

compared with other studies in literature (Table 2). In addition, using a recombinant enzyme producing strain often results in easier and more economical purification steps since recombinant strains often only excrete a single protein [16].

4. Conclusion

This work aimed to study the optimum conditions for xylanase production in a STR using a recombinant *A. nidulans* strain. Oxygen transfer into microbial cells during aerobic bioprocesses strongly affects product formation by influencing metabolic rate. In a STR there are two main factors, aeration and agitation, that influence oxygen transfer rate. It was therefore important to consider the implication of these factors of the volumetric oxygen transfer coefficient (k_La). It was shown that high k_La was preferred for enzyme production, but an agitation rate of 600 rpm had a harmful effect on enzyme production due to high shear stress on the production organism, *A. nidulans*. The conditions that resulted in the greatest xylanase activity produced were 400 rpm agitation, 2 vvm aeration rate, and k_La of 38.6 h^{-1}. Using fed batch and repeated batch cell cultivation strategies to limit substrate inhibition increased xylanase productivity compared to batch cultivation. Xylanase productivity increased from 309 U/mL/day with batch cultivation to 327 U/mL/day with fed batch and 373 U/mL/day with repeated batch. This work showed that enhanced aeration and agitation combined with a repeated batch cell cultivation mode improved xylanase production from this recombinant *Aspergillus nidulans* strain.

5. Declaration of interests

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Conflict of interest

The authors do not have any conflict of interest.

CRediT authorship contribution statement

Asmaa Abdella: Conceptualization, Formal analysis, Investigation, Writing - original draft. **Fernando Segato:** Conceptualization, Funding acquisition, Resources, Writing - review & editing. **Mark R. Wilkins:** Conceptualization, Supervision, Funding acquisition, Project administration, Writing - review & editing.

Acknowledgements

The authors would like to acknowledge the Egyptian Cultural & Educational Bureau for, the University of Nebraska Agricultural Research Division/São Paulo Research Foundation SPRINT program, the São Paulo Research Foundation under process numbers 2014/06923-6, 2014/18714-2 and 2015/50025-0 and the Nebraska Corn Checkoff Presidential Chair Endowment for providing funding for the work described in this manuscript.

References

[1] E. Topakas, P. Katapodis, D. Kekos, B.J. Macris, P. Christakopoulos, Production and partial characterization of xylanase by Sporotrichum thermophile under solid-state fermentation, World J. Microbiol. Biotechnol. 19 (2003) 195–198.
[2] K.S. Kumar, A. Manimaran, K. Permaul, S. Singh, Production of β-xylanase by a Thermomyces lanuginosus MC 134 mutant on corn cobs and its application in biobleaching of bagasse pulp, J. Biosci. Bioeng. 107 (2009) 494–498, doi:http://dx.doi.org/10.1016/j.jbiosc.2008.12.020.
[3] M.L.T.M. Polizeli, A.C.S. Rizzatti, R. Monti, H.F. Terenzi, J.A. Jorge, D.S. Amorim, Xylanases from fungi: properties and industrial applications, Appl. Microbiol. Biotechnol. 67 (2005) 577–591.
[4] M. Azin, R. Moravej, D. Zareh, Production of xylanase by Trichoderma longibrachiatum on a mixture of wheat bran and wheat straw: optimization of culture condition by Taguchi method, Enzyme Microb. Technol. 40 (2007) 801–805, doi:http://dx.doi.org/10.1016/j.enzmictec.2006.06.013.

Please cite this article in press as: A. Abdella, et al., Optimization of process parameters and fermentation strategy for xylanase production in a stirred tank reactor using a mutant *Aspergillus nidulans* strain, Biotechnol. Rep. (2020), https://doi.org/10.1016/j.btre.2020.e00457

[5] S. Nagar, A. Mittal, V.K. Gupta, Enzymatic clarification of fruit juices (apple, pineapple, and tomato) using purified Bacillus pumilus SV-85S xylanase, Biotechnol. Bioprocess Eng. 17 (2012) 1165–1175.
[6] T. Periasamy, K. Aiyasamy, M.R.F.M. George, M.R.F.M. George, T. Rathinavel, M. Ramasamy, Optimization of xylanase production from Aspergillus flavus in solid state fermentation using agricultural waste as a substrate, Int. J. Adv. Interdiscip. Res. 4 (2017) 29, doi:http://dx.doi.org/10.29191/ijaidr.2017.4.3.06.
[7] H.Y. Wang, B.Q. Fan, C.H. Li, S. Liu, M. Li, Effects of rhamnolipid on the cellulase and xylanase in hydrolysis of wheat straw, Bioresour. Technol. 102 (2011) 6515–6521.
[8] F. Garcia-Ochoa, E. Gomez, Bioreactor scale-up and oxygen transfer rate in microbial processes: An overview, Biotechnol. Adv. 27 (2009) 153–176.
[9] Y. Zhou, L.R. Han, H.W. He, B. Sang, D.L. Yu, J.T. Feng, X. Zhang, Effects of agitation, aeration and temperature on production of a novel glycoprotein GP-1 by Streptomyces kanasenisi ZX01 and scale-Up based on volumetric oxygen transfer coefficient, Molecules. 23 (2018) 125.
[10] D. Çaşcaval, A.-I. Galaction, M. Turnea, Comparative analysis of oxygen transfer rate distribution in stirred bioreactor for simulated and real fermentation broths, J. Ind. Microbiol. Biotechnol. 38 (2011) 1449–1466, doi:http://dx.doi.org/10.1007/s10295-010-0930-3.
[11] F. Mantzouridou, T. Roukas, P. Kotzekidou, Effect of the aeration rate and agitation speed on β-carotene production and morphology of Blakeslea trispora in a stirred tank reactor: mathematical modeling, Biochem. Eng. J. 10 (2002) 123–135, doi:http://dx.doi.org/10.1016/S1369-703X(01)00166-8.
[12] J. Velasco, B. Oliva, E.J. Mulinari, L.P. Quintero, A. da Silva Lima, A.L. Gonçalves, T.A. Gonçalves, A. Damasio, F.M. Squina, A.M. Ferreira Milagres, A. Abdella, M.R. Wilkins, F. Segato, Heterologous expression and functional characterization of a GH10 endoxylanase from Aspergillus fumigatus var. Niveus with potential biotechnological application, Biotechnol. Rep. Amst. (Amst) 24 (2019) e00382, doi:http://dx.doi.org/10.1016/j.btre.2019.e00382.
[13] A. Abdella, F. Segato, M.R. Wilkins, Optimization of nutrient medium components for production of a client endo-β-1,4-xylanase from Aspergillus fumigatus var. Niveus using a recombinant Aspergillus nidulans strain, Biocatal. Agric. Biotechnol. 20 (2019) 101267, doi:http://dx.doi.org/10.1016/j.bcab.2019.101267.
[14] A.R. De Lima, T.M. Silva, B. Fausto, R. Almeida, F.M. Squina, D.A. Ribeiro, A.F. Paes, F. Segato, R.A. Prade, J.A. Jorge, H.F. Terenzi, M. De Lourdes, T.M. Polizeli, Heterologous expression of an Aspergillus niveus xylanase GH11 in Aspergillus nidulans and its characterization and application, Process Biochem. 46 (2011) 1236–1242, doi:http://dx.doi.org/10.1016/j.procbio.2011.01.027.
[15] M.S. Lima, A.R.D.L. Damasio, P.M. Crnkovic, M.R. Pinto, A.M. Silva, J.C.R. Silva, F. Segato, R.C. De Lucas, J.A. Jorge, M.D.L.T.D.M. Polizeli, Co-cultivation of Aspergillus nidulans recombinant strains produces an enzymatic cocktail as alternative to alkaline sugarcane bagasse pretreatment, Front Microbiol. 7 (2016) 1–9, doi:http://dx.doi.org/10.3389/fmicb.2016.00583.
[16] N. Arifin, A. Lan, A.R.M. Yahya, R. Noordin, Purification of BmR1 recombinant protein, Protein J. 29 (2010), doi:http://dx.doi.org/10.1007/s10930-010-9281-1.
[17] J. Ding, M.J. Gao, G.L. Hou, K.X. Liang, R.S. Yu, Z. Li, Z.P. Shi, Stabilizing porcine interferon-alpha production by Pichia pastoris with an ethanol on-line measurement based DO-Stat glycerol feeding strategy, J. Chem. Technol. Biotechnol. 89 (2014) 1948–1953.
[18] K. Markošová, L. Weignerová, M. Rosenberg, V. Křen, M. Rebroš, Upscale of recombinant α-L-rhamnosidase production by Pichia pastoris Mut(S) strain, Front. Microbiol. 6 (2015) 1140, doi:http://dx.doi.org/10.3389/fmicb.2015.01140.
[19] T.T. Shang, D.Y. Si, D.Y. Zhang, X.H. Liu, L.M. Zhao, C. Hu, Y. Fu, R.J. Zhang, Enhancement of thermoalkaliphilic xylanase production by Pichia pastoris through novel fed-batch strategy in high cell-density fermentation, BMC Biotechnol. 17 (2017) 55.
[20] M.L. Shuler, F. Kargi, M. DeLisa, Bioprocess Engineering: Basic Concepts, 3rd edition, Prentice Hall, Boston, 2017.
[21] A. Abdella, T.E. Mazeed, A.F. El-Baz, S.T. Yang, Production of beta-glucosidase from wheat bran and glycerol by Aspergillus niger in stirred tank and rotating fibrous bed bioreactors, Process Biochem. 51 (2016) 1331–1337.
[22] F. Segato, A.R.L. Damasio, T.A. Goncalves, R.C. de Lucas, F.M. Squina, S.R. Decker, R.A. Prade, High-yield secretion of multiple client proteins in Aspergillus, Enzyme Microb. Technol. 51 (2012) 100–106.
[23] B. Couger, T. Weirick, A.R.L. Damasio, F. Segato, M.D.T.D. Polizeli, R.S.C. de Almeida, G.H. Goldman, R.A. Prade, The genome of a thermo tolerant, pathogenic albino Aspergillus fumigatus, Front. Microbiol. 9 (2018) 1827.
[24] A. Ricardo, D.L. Damasio, M.V. Rubio, T.A. Gonçalves, G.F. Persinoti, F. Segato, R. A. Prade, F.J. Contesini, A.P. De Souza, M.S. Buckeridge, F.M. Squina, Xyloglucan Breakdown by Endo-xyloglucanase Family 74 From Aspergillus fumigatus, Appl. Mirobiol. Biotechnol. 98 (2017) 2893–2903.
[25] A. Abdella, T.E.-S. Mazeed, S.-T. Yang, A.F. El-Baz, Production of β-glucosidase by aspergillus niger on wheat bran and glycerol in submerged culture: factorial experimental design and process optimization, Curr. Biotechnol. 3 (2014) 197–206.
[26] A. Ferreira, G. Pereira, J.A. Teixeira, F. Rocha, Statistical tool combined with image analysis to characterize hydrodynamics and mass transfer in a bubble column, Chem. Eng. J. 180 (2012) 216–228.
[27] G.L. Miller, Use of dinitrosalicylic acid reagent for determination of reducing sugar, Anal. Chem. 31 (1959) 426–428.
[28] M.M. Bradford, Rapid and sensitive method for quantitation of microgram quantities of protein utilizing principle of protein-dye binding, Anal. Biochem. 72 (1976) 248–254.
[29] A. Sluiter, B. Hames, R. Ruiz, C. Scarlata, J. Sluiter, D. Templeton, Determination of sugars, byproducts, and degradation products in liquid fraction process samples, Golden Natl. Renew. Energy Lab. 11 (2006).
[30] A. Abdella, T.E.-S. Mazeed, S.-T. Yang, A.F. El-Baz, Production of β-glucosidase by Aspergillus niger on wheat bran and glycerol in submerged culture: factorial experimental design and process optimization, Curr. Biotechnol. 3 (2014) 197–206.
[31] J. Gomes, H. Purkarthofer, M. Hayn, J. Kapplmüller, M. Sinner, W. Steiner, Production of a high level of cellulase-free xylanase by the thermophilic fungus Thermomyces lanuginosus in laboratory and pilot scales using lignocellulosic materials, Appl. Microbiol. Biotechnol. 39 (1993) 700–707, doi:http://dx.doi.org/10.1007/bf00164453.
[32] G. Ghoshal, U.C. Banerjee, U.S. Shivhare, Xylanase production by Penicillium citrinum in laboratory-scale stirred tank reactor, Chem. Biochem. Eng. Q. 28 (2014) 399–408.
[33] J. Sinha, J.T. Bae, J.P. Park, K.H. Kim, C.H. Song, J.W. Yun, Changes in morphology of Paecilomyces japonica and their effect on broth rheology during production of exo-biopolymers, Appl. Microbiol. Biotechnol. 56 (2001) 88–92.
[34] H. El Enshasy, E. Abuoul, Y. Helmy, Azaly, optimization of the industrial production of alkaline protease by Bacillus licheniformis in different production scales, Aust. J. Basic Appl. Sci. 2 (2008) 583–593.
[35] M. Michelin, A.M. de Oliveira Mota, M. de L.T. de M. Polizeli, D.P. da Silva, A.A. Vicente, J.A. Teixeira, Influence of volumetric oxygen transfer coefficient (kLa) on xylanases batch production by Aspergillus niger van Tieghem in stirred tank and internal-loop airlift bioreactors, Biochem. Eng. J. 80 (2013) 19–26, doi:http://dx.doi.org/10.1016/j.bej.2013.09.002.
[36] R. Potumarthi, S. Ch, A. Jetty, Alkaline protease production by submerged fermentation in stirred tank reactor using Bacillus licheniformis NCIM-2042: effect of aeration and agitation regimes, Biochem. Eng. J. 34 (2007) 185–192, doi:http://dx.doi.org/10.1016/j.bej.2006.12.003.
[37] M.S. Bhattacharyya, A. Singh, U.C. Banerjee, Production of carbonyl reductase by Geotrichum candidum in a laboratory scale bioreactor, Bioresour. Technol. 99 (2008) 8765–8770.
[38] R.R. Singhania, R.K. Sukumaran, K.P. Rajasree, A. Mathew, L. Gottumukkala, A. Pandey, Properties of a major beta-glucosidase-BGL1 from Aspergillus niger NII-08121 expressed differentially in response to carbon sources, Process Biochem. 46 (2011) 1521–1524.
[39] J.F. de Burkert, R.R. Maldonado, F. Maugeri Filho, M.I. Rodrigues, Comparison of lipase production by Geotrichum candidum in stirring and airlift fermenters, J. Chem. Technol. Biotechnol. 80 (2005) 61–67, doi:http://dx.doi.org/10.1002/jctb.1157.
[40] C. Bandaiphet, P. Prasertsan, Effect of aeration and agitation rates and scale-up on oxygen transfer coefficient, k(L)a in exopolysaccharide production from Enterobacter cloacae WD7, Carbohydr. Polym. 66 (2006) 216–228.
[41] M. Fenice, P. Barghini, L. Selbmann, F. Federici, Combined effects of agitation and aeration on the chitinolytic enzymes production by the Antarctic fungus Lecanicillium muscarium CCFEE 5003, Microb. Cell Fact. 11 (2012) 12.
[42] L. Dos Reis, R.C. Fontana, P. da Silva Delabona, D.J. da Silva Lima, M. Camassola, J.G. da Cruz Pradella, A.J.P. Dillon, Increased production of cellulases and xylanases by Penicillium echinulatum S1M29 in batch and fed-batch culture, Bioresour. Technol. 146 (2013) 597–603, doi:http://dx.doi.org/10.1016/j.biortech.2013.07.124.
[43] M. Muller, F. Segato, R.A. Prade, M.R. Wilkins, High-yield recombinant xylanase production by Aspergillus nidulans under pyridoxine limitation, J. Ind. Microbiol. Biotechnol. 41 (2014) 1563–1570.
[44] R.S.S. Teixeira, F.G. Siqueira, M.V. de Souza, E.X. Ferreira Filho, E.P. da Silva Bon, Purification and characterization studies of a thermostable β-xylanase from Aspergillus awamori, J. Ind. Microbiol. Biotechnol. 37 (2010) 1041–1051.
[45] C. Techapun, N. Poosaran, M. Watanabe, K. Sasaki, Optimization of aeration and agitation rates to improve cellulase-free xylanase production by thermotolerant Streptomyces sp. Ab106 and repeated fed-batch cultivation using agricultural waste, J. Biosci. Bioeng. 95 (2003) 298–301, doi:http://dx.doi.org/10.1016/S1389-1723(03)80033-6.
[46] R. Bandikari, U. Katike, N.S. Seelam, V.S.R. Obulam, Valorization of de-oiled cakes for xylanase production and optimization using central composite design by Trichoderma koeningi isolate, Turkish J. Biochem. Biyokim. Derg. 42 (2017) 317–328.
[47] H. Moteshafi, S.M. Mousavi, M. Hashemi, Enhancement of xylanase productivity using industrial by-products under solid suspended fermentation in a stirred tank bioreactor, with a dissolved oxygen constant control strategy, RSC Adv. 6 (2016) 35559–35567, doi:http://dx.doi.org/10.1039/C6RA01449F.
[48] Y. Bakri, M. Al-Jazairi, G. Al-Kayat, Xylanase production by a newly isolated Aspergillus niger SS7 in submerged culture, Polish J. Microbiol. 57 (2008) 249–251.
[49] Y. Cao, D.J. Meng, J. Lu, J. Long, Statistical optimization of xylanase production by Aspergillus niger AN-13 under submerged fermentation using response surface methodology, African J. Biotechnol. 7 (2008) 631–638.
[50] Y. Bakri, A. Mekaeel, A. Koreih, Influence of agitation speeds and aeration rates on the Xylanase activity of Aspergillus niger SS7, Braz. Arch. Biol. Technol. 54 (2011) 659–664, doi:http://dx.doi.org/10.1590/s1516-89132011000400003.
[51] S.W. Kim, S.W. Kang, J.S. Lee, Cellulase and xylanase production by Aspergillus niger KKS in various bioreactors, Bioresour. Technol. 59 (1997) 63–67, doi:http://dx.doi.org/10.1016/S0960-8524(96)00127-7.

Please cite this article in press as: A. Abdella, et al., Optimization of process parameters and fermentation strategy for xylanase production in a stirred tank reactor using a mutant *Aspergillus nidulans* strain, Biotechnol. Rep. (2020), https://doi.org/10.1016/j.btre.2020.e00457