

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F. Larsen

January 2005

Test 1869: John Deere 5525 Diesel 12-Speed

Nebraska Tractor Test Lab

University of Nebraska-Lincoln, tractortestlab@unl.edu

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Energy Systems Commons](#), [History of Science, Technology, and Medicine Commons](#), [Other Mechanical Engineering Commons](#), [Physical Sciences and Mathematics Commons](#), [Science and Mathematics Education Commons](#), and the [United States History Commons](#)

Nebraska Tractor Test Lab, "Test 1869: John Deere 5525 Diesel 12-Speed" (2005). *Nebraska Tractor Tests*. 2119.

<https://digitalcommons.unl.edu/tractormuseumlit/2119>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

NEBRASKA TRACTOR TEST 1869

JOHN DEERE 5525 DIESEL

12 SPEED

POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
MAXIMUM POWER AND FUEL CONSUMPTION					

Rated Engine Speed—(PTO speed—537 rpm)					
76.01 (56.68)	2401	5.38 (20.36)	0.499 (0.304)	14.13 (2.78)	
Maximum Power - (1 hour)					
77.96 (58.13)	2250	5.18 (19.60)	0.468 (0.285)	15.06 (2.97)	

VARYING POWER AND FUEL CONSUMPTION

76.01 (56.68)	2401	5.38 (20.36)	0.499 (0.304)	14.13 (2.78)	Air temperature
69.15 (51.57)	2563	5.39 (20.40)	0.550 (0.334)	12.83 (2.53)	76°F (25°C)
52.36 (39.05)	2587	4.69 (17.77)	0.632 (0.384)	11.15 (2.20)	Relative humidity
34.97 (26.07)	2603	3.91 (14.82)	0.789 (0.480)	8.93 (1.76)	48%
17.63 (13.15)	2628	2.68 (10.15)	1.072 (0.652)	6.58 (1.30)	Barometer
0.84 (0.63)	2639	1.84 (6.98)	15.404 (9.370)	0.46 (0.09)	28.99"Hg (98.17 kPa)

Maximum Torque 229 lb.-ft. (310 Nm) at 1401 rpm
Maximum Torque Rise - 37.9%
Torque rise at 1900 rpm - 19%

TRACTOR SOUND LEVEL WITH CAB

	Front Wheel Drive Engaged dB(A)	Disengaged dB(A)
At no load in 6th(B2) gear	85.8	85.8
Transport in 12th(C4) gear		85.8
Bystander in 12th(C4) gear		83.3

TIRES AND WEIGHT

Rear Tires—No., size, ply & psi (kPa)
Front Tires—No., size, ply & psi (kPa)
Height of Drawbar
Static Weight with operator—Rear
—Front
—Total

Tested Without Ballast

Two 18.4R30; **, 12 (85)
Two 12.4-24; 6; 14 (95)
18.0 in (455 mm)
4625 lb (2098 kg)
2985 lb (1354 kg)
7610 lb (3452 kg)

Location of tests: Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln Nebraska 68583-0832

Dates of tests: November 15-23, 2005.

Manufacturer: John Deere Commercial Products Inc., 700 Horizon South Parkway, Grovetown Ga. USA, 30813

FUEL, OIL and TIME: Fuel No. 2 Diesel Specific gravity converted to 60°/60° F (15°/15°C) 0.8468 Fuel weight 7.051 lbs/gal (0.845 kg/l) Oil SAE 10W30 API service classification CF/CH-4 Transmission and hydraulic lubricant John Deere Hy-Gard Fluid Front axle lubricant SAE 80W90 API GL-5 Total time engine was operated 12.5 hours

ENGINE: Make John Deere Diesel Type four cylinder vertical with turbocharger Serial No. *PE4045T414363* Crankshaft lengthwise Rated engine speed 2400 Bore and stroke 4.19" x 5.00" (106.4 mm x 127.0 mm) Compression ratio 17.6 to 1 Displacement 276 cu in (4517 ml) Starting system 12 volt Lubrication pressure Air cleaner one paper element and one polyester felt element Oil filter one full flow cartridge Oil cooler engine coolant heat exchanger for crankcase oil, radiator for transmission and hydraulic oil Fuel filter one paper element and sediment bowl Muffler underhood Exhaust vertical Cooling medium temperature control one thermostat

ENGINE OPERATING PARAMETERS: Fuel rate: 35.1 - 38.7 lb/h (15.9 - 17.5 kg/h) High idle: 2600 - 2650 rpm Turbo boost: nominal 11.6 - 14.5 psi (80 - 100 kPa) as measured 13.1 psi (91 kPa)

CHASSIS: Type front wheel assist Serial No. *LV5525R155016* Tread width rear 54.8" (1417 mm) to 71.7" (1820 mm) front 52.8" (1340 mm) to 75.0" (1904 mm) Wheelbase 85.7" (2178 mm) Hydraulic control system direct engine drive Transmission selective gear fixed ratio Nominal travel speeds mph (km/h) first 1.05 (1.69) second 1.42 (2.29) third 1.94 (3.13) fourth 2.60 (4.19) fifth 3.02 (4.86) sixth 4.11 (6.61) seventh 5.61 (9.03) eighth 7.51 (12.09) ninth 8.72 (14.04) tenth 11.88 (19.12) eleventh 16.21 (26.09) twelfth 21.72 (34.96) reverse 1.14 (1.84), 1.55 (2.50), 2.12 (3.42), 2.85 (4.58), 3.29 (5.30), 4.48 (7.21), 6.12 (9.85), 8.20 (13.19), 9.52 (15.32), 12.96 (20.85), 17.69 (28.47), 23.69 (38.13) Clutch single dry disc operated by foot pedal Brakes single wet disc hydraulically operated by two foot pedals which can be locked together Steering hydrostatic Power take-off 540 rpm at 2410 engine rpm or 540 rpm at 1716 engine rpm Unladen tractor mass 7435 lb (3372 kg)

THREE POINT HITCH PERFORMANCE (OECD Static Test)

CATEGORY: II

Quick Attach: None

Maximum force exerted through whole range:	3213 lbs	(14.3 kN)
i) Opening pressure of relief valve:	NA	
Sustained pressure of the open relief valve:	2860 psi	(197 bar)
ii) Pump delivery rate at minimum pressure and rated engine speed:	18.6 GPM	(70.4 l/min)
iii) Pump delivery rate at maximum hydraulic power:	18.7 GPM	(70.8 l/min)
Delivery pressure:	2516 psi	(174 bar)
Power:	27.4 HP	(20.5 kW)

THREE POINT HITCH PERFORMANCE

Observed maximum pressure psi.(bar)	2830(195)
Location:	remote outlet
Hydraulic oil temperature: °F(°C)	148(64)
Location:	pump inlet
Category:	II
Quick attach:	none

SAE Static Test—System pressure 2520 psi (174 Bar)

Hitch point distance to ground level in.(mm)	8.0(203)	15.0(381)	22.0(559)	29.0(737)	36.0(914)
Lift force on frame lb	4694	4829	4685	4266	3596
" " " " " (kN)	(20.9)	(21.5)	(20.8)	(19.0)	(16.0)

REPAIRS AND ADJUSTMENTS: No repairs or adjustments


REMARKS: All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. For the maximum power tests, the fuel temperature at the injection pump inlet was maintained at 136°F (58°C).

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. **1869**, March 17, 2006

Leonard L. Bashford
Director

M.F. Kocher
V.I. Adamchuk
J.A. Smith
Board of Tractor Test Engineers

	SAE Test		OECD Test	
	inch	mm	inch	mm
A	23.2	590	24.1	613
B	11.0	280	11.0	280
C	14.0	356	14.0	356
D	12.2	311	12.2	311
E	11.2	284	11.2	284
F	6.5	166	6.5	166
G	27.4	695	27.4	695
H	0.2	4	0.2	4
I	15.1	384	15.1	384
J	20.9	530	20.9	530
K	16.7	424	16.7	424
L	39.2	996	39.2	996
M	22.4	570	22.4	570
N	32.9	836	32.9	836
O	8.0	203	8.0	203
P	40.9	1040	44.9	1140
Q	34.0	864	34.0	864
R	20.8	527	20.8	527

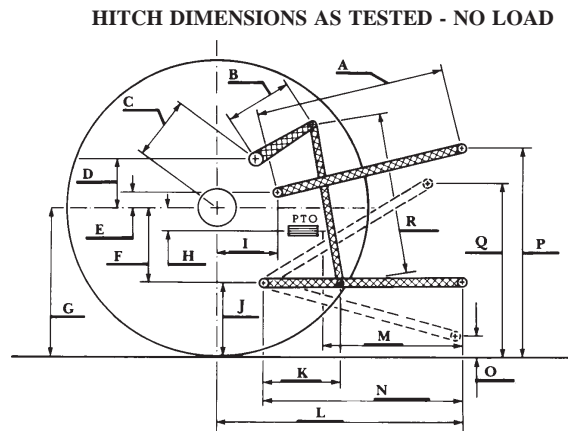

Shiftable PTO Performance

Economy mode

540 PTO rpm @ 1716 engine rpm

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)
63.91 (47.66)	1712	3.90 (14.76)	0.430 (0.262)	16.39 (3.23)
48.12 (35.88)	1718	3.11 (11.76)	0.455 (0.277)	15.49 (3.05)
32.48 (24.22)	1722	2.18 (8.27)	0.474 (0.288)	14.87 (2.93)
15.94 (11.88)	1715	1.40 (5.31)	0.621 (0.378)	11.35 (2.24)
0.51 (0.38)	1716	0.84 (3.17)	11.477 (6.981)	0.61 (0.12)

Normal mode

540 PTO rpm @ 2410 engine rpm

64.00 (47.73)	2410	4.86 (18.41)	0.536 (0.326)	13.16 (2.59)
48.07 (35.84)	2412	4.04 (15.30)	0.593 (0.361)	11.89 (2.34)
32.57 (24.29)	2422	3.25 (12.29)	0.703 (0.428)	10.03 (1.98)
15.96 (11.90)	2413	2.14 (8.11)	0.946 (0.575)	7.45 (1.47)
0.67 (0.50)	2411	1.56 (5.91)	16.460 (10.012)	0.43 (0.08)



JOHN DEERE 5525 DIESEL