

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F.
Larsen

January 2002

Nebraska Summary 384: John Deere 6120 Syncroplus Diesel 12-Speed

Nebraska Tractor Test Lab

University of Nebraska-Lincoln, tractortestlab@unl.edu

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Energy Systems Commons](#), [History of Science, Technology, and Medicine Commons](#), [Other Mechanical Engineering Commons](#), [Physical Sciences and Mathematics Commons](#), [Science and Mathematics Education Commons](#), and the [United States History Commons](#)

Nebraska Tractor Test Lab, "Nebraska Summary 384: John Deere 6120 Syncroplus Diesel 12-Speed" (2002). *Nebraska Tractor Tests*. 2183.

<https://digitalcommons.unl.edu/tractormuseumlit/2183>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

SUMMARY OF OECD TEST 2028—NEBRASKA SUMMARY 384

JOHN DEERE 6120 SYNCROPLUS DIESEL

12 SPEED

POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
MAXIMUM POWER AND FUEL CONSUMPTION					
Rated Engine Speed (PTO speed-1042 rpm)					
66.9 (49.9)	2300	4.43 (16.76)	0.459 (0.279)	15.11 (2.98)	
Standard Power Take-off Speed (1000 rpm)					
69.3 (51.7)	2208	4.41 (16.69)	0.440 (0.268)	15.72 (3.10)	
Maximum Power (2 hours)					
72.3 (53.9)	2000	4.27 (16.15)	0.408 (0.248)	16.95 (3.34)	

VARYING POWER AND FUEL CONSUMPTION					
66.9 (49.9)	2300	4.43 (16.76)	0.459 (0.279)	15.11 (2.98)	Air temperature
60.1 (44.8)	2435	4.34 (16.42)	0.499 (0.304)	13.86 (2.73)	73°F (23°C)
45.5 (33.9)	2450	3.77 (14.25)	0.573 (0.348)	12.08 (2.38)	Relative humidity
30.6 (22.8)	2468	3.20 (12.12)	0.725 (0.441)	9.54 (1.88)	37%
15.3 (11.4)	2484	2.53 (9.58)	1.140 (0.694)	6.06 (1.19)	Barometer
--	2500	1.79 (6.77)	--	--	29.09" Hg (98.5 kPa)

Maximum Torque - 231 lb.-ft. (314 Nm) at 1101 rpm
 Maximum Torque Rise - 51.7%
 Torque rise at 1800 engine rpm - 33%

DRAWBAR PERFORMANCE (Unballasted—Front Drive Engaged) FUEL CONSUMPTION CHARACTERISTICS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel lb/hp.hr (kg/kW.h)	Consumption Hp.hr/gal (kW.h/l)	Temp. °F (°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
Maximum Power—7th (B3) Gear									
53.5 (39.9)	4150 (18.47)	4.83 (7.77)	2302	6.2	0.579 (0.352)	12.08 (2.38)	136 (58)	57 (14)	29.7 (100.6)
75% of Pull at Maximum Power—7th (B3) Gear									
43.4 (32.3)	3140 (13.98)	5.18 (8.33)	2424	4.4	0.672 (0.409)	10.40 (2.05)	136 (58)	59 (15)	29.7 (100.6)
50% of Pull at Maximum Power—7th (B3) Gear									
29.4 (21.9)	2085 (9.27)	5.29 (8.52)	2442	2.9	0.856 (0.521)	8.16 (1.61)	136 (58)	57 (14)	29.7 (100.6)
75% of Pull at Reduced Engine Speed—8th (C2) Gear									
43.4 (32.3)	3185 (14.16)	5.11 (8.22)	1854	4.4	0.556 (0.338)	12.59 (2.48)	136 (58)	61 (16)	29.7 (100.6)
50% of Pull at Reduced Engine Speed—8th (C2) Gear									
29.8 (22.2)	2110 (9.39)	5.29 (8.52)	1890	2.9	0.671 (0.408)	10.42 (2.05)	136 (58)	59 (15)	29.7 (100.6)

Location of Test: DLG Testing Station for Agricultural Machinery Max - Eyth - Weg 1, D-64823 Gros-Umstadt, Germany

Dates of Test: February - May, 2002

Manufacturer: Deere & Company, Moline, Illinois, USA

FUEL and OIL: Fuel No. 2 Diesel **Specific gravity converted to 60°/60° F (15°/15°C)** 0.831 **Fuel weight** 6.92 lbs/gal (0.829 kg/l) **Oil SAE 15W-40 API service classification** CF-4 **Transmission and hydraulic lubricant** John Deere Hy-Gard fluid **Front axle lubricant** SAE 80W90.

ENGINE: Make John Deere Diesel **Type** four cylinder vertical with turbocharger **Serial No.** 664943 **Crankshaft** lengthwise **Rated engine speed** 2300 **Bore and stroke** 4.19" x 5.00" (106.5 mm x 127.0 mm) **Compression ratio** 16.9 to 1 **Displacement** 276 cu in (4525 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** two paper elements **Oil filter** one full flow cartridge **Oil cooler** engine coolant heat exchanger for crankcase oil, radiator for hydraulic and transmission oil **Fuel filter** one paper element **Muffler** underhood **Exhaust** vertical **Cooling medium temperature control** thermostat and variable speed fan

CHASSIS: Type front wheel assist **Serial No.** 322555 **Tread width** rear 63.6" (1616 mm) to 75.3" (1912 mm) front 59.8" (1520 mm) to 79.1" (2010 mm) **Wheel base** 94.5" (2400 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio **Nominal travel speeds mph (km/h)** first 1.44 (2.31) second 1.99 (3.20) third 2.54 (4.08) fourth 2.88 (4.63) fifth 3.99 (6.42) sixth 4.73 (7.61) seventh 5.09 (8.19) eighth 6.56 (10.56) ninth 8.36 (13.46) tenth 9.74 (15.67) eleventh 13.52 (21.76) twelfth 17.22 (27.72) reverse 1.75 (2.81), 3.50 (5.64), 5.76 (9.27), 11.87 (19.10) **Clutch** multiple wet disc hydraulically operated by foot pedal **Brakes** wet disc hydraulically operated by two foot pedals which can be locked together **Steering** hydrostatic **Power take-off** 540 rpm at 2143 engine rpm or 1000 rpm at 2208 engine rpm. **Unladen tractor mass** 9350 lb (4240 kg)

DRAWBAR PERFORMANCE
(Unballasted-Front Drive Engaged)
MAXIMUM POWER IN SELECTED GEARS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Temp. °F (°C) cool- ing med	Temp. °F (°C) Air dry bulb	Barom. inch Hg (kPa)	
4th (B1) Gear									
49.3 (36.8)	7395 (32.90)	2.50 (4.03)	2331	15.0	0.632 (0.384)	11.07 (2.18)	120 (49)	66 (19)	29.5 (100.0)
5th (B2) Gear									
53.5 (39.9)	6435 (28.62)	3.12 (5.02)	1999	11.5	0.556 (0.338)	12.59 (2.48)	120 (49)	68 (20)	29.5 (100.0)
6th (C1) Gear									
55.5 (41.4)	5535 (24.63)	3.76 (6.05)	1998	9.3	0.536 (0.326)	13.05 (2.57)	115 (46)	63 (17)	29.5 (100.0)
7th (B3) Gear									
56.5 (42.1)	5150 (22.91)	4.11 (6.61)	2000	8.4	0.523 (0.318)	13.36 (2.63)	115 (46)	61 (16)	29.5 (100.0)
8th (C2) Gear									
55.4 (41.3)	3825 (17.01)	5.44 (8.75)	1996	5.8	0.536 (0.326)	13.05 (2.57)	115 (46)	63 (17)	29.5 (100.0)
9th (C3) Gear									
55.6 (41.4)	2960 (13.17)	7.04 (11.33)	1997	3.7	0.532 (0.324)	13.15 (2.59)	118 (48)	66 (19)	29.5 (100.0)
10th (D1) Gear									
54.0 (40.3)	2455 (10.93)	8.25 (13.27)	1992	3.3	0.545 (0.331)	12.84 (2.53)	118 (48)	68 (20)	29.5 (100.0)

REPAIRS AND ADJUSTMENTS: No repairs or adjustments

REMARKS: All test results were determined from observed data obtained in accordance with official OECD test procedures. This tractor did not meet the manufacturer's 3 point lift claim of 4745 lb (2152 kg). The performance results on this summary were taken from OECD tests conducted under the Code II Test Code procedure.

We, the undersigned, certify that this is a true summary of data from OECD Report No. **2028**, Nebraska Summary 384, January 23, 2003.

Leonard L. Bashford
 Director

M.F. Kocher
 V.I. Adamchuk
 W.P. Campbell
 Board of Tractor Test Engineers

TRACTOR SOUND LEVEL WITH CAB	Front Wheel Drive	
	Engaged dB(A)	Disengaged dB(A)
At no load in 6th(C1) Gear	72.0	72.0
Maximum Sound level	73.5	72.5
Bystander	--	--

TIRES AND WEIGHT

Rear Tires—No., size, ply & psi (kPa)
Front Tires—No., size, ply & psi (kPa)
Height of Drawbar
Static Weight with operator—Rear
 — Front
 — Total

Tested Without Ballast

Two 16.9-30; 6; 17 (120)
 Two 12.4-24; 6; 17 (120)
 13.8 in (350 mm)
 5745 lb (2605 kg)
 3770 lb (1710 kg)
 9515 lb (4315 kg)

THREE POINT HITCH PERFORMANCE (OECD Static Test)


CATEGORY: II

Quick Attach: none

Maximum Force Exerted Through Whole Range: 4000 lbs (17.80 kN)

- i) Opening pressure of relief valve: NA
- Sustained pressure of the open relief valve: 2975 psi (205 bar)
- ii) Pump delivery rate at minimum pressure: 30.0 GPM (113.6 l/min)
- iii) Pump delivery rate at maximum
 - hydraulic power: 27.7 GPM (104.8 l/min)
 - Delivery pressure: 2175 psi (150 bar)
 - Power: 35.1 HP (26.2 kW)

HITCH DIMENSIONS AS TESTED—NO LOAD

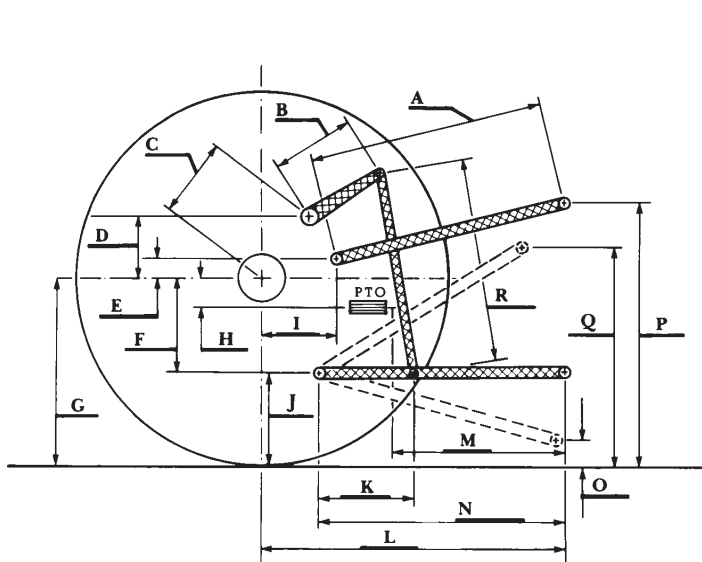

	inch	mm
A	25.6	650
B	12.0	305
C	20.0	508
D	18.7	475
E	6.9	175
F	8.9	225
G	27.4	695
H	3.1	80
I	18.1	460
J	18.5	470
K	19.9	505
L	42.5	1080
M	21.7	550
N	37.2	945
O	7.9	200
P	42.5	1080
Q	33.3	845
R	29.3	745