

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F. Larsen

January 2000

Test 1774: John Deere 8210T Diesel 16-Speed

Nebraska Tractor Test Lab

University of Nebraska-Lincoln, tractortestlab@unl.edu

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Energy Systems Commons](#), [History of Science, Technology, and Medicine Commons](#), [Other Mechanical Engineering Commons](#), [Physical Sciences and Mathematics Commons](#), [Science and Mathematics Education Commons](#), and the [United States History Commons](#)

Nebraska Tractor Test Lab, "Test 1774: John Deere 8210T Diesel 16-Speed" (2000). *Nebraska Tractor Tests*. 2201.

<https://digitalcommons.unl.edu/tractormuseumlit/2201>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

NEBRASKA OECD TRACTOR TEST 1774—SUMMARY 309

JOHN DEERE 8210T DIESEL

16 SPEED

Location of Test: Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln, Nebraska 68583-0832

Dates of Test: April 24-May 17, 2000

Manufacturer: John Deere Waterloo Works, P.O. Box 270, Waterloo Ia, USA, 50704

FUEL, OIL and TIME: Fuel No. 2 Diesel
Specific gravity converted to 60°/60°F (15°/15°C) 0.8487 **Fuel weight** 7.067 lbs/gal (0.847 kg/l) **Oil** SAE 15W-40 **API service classification** CF-4
Transmission and hydraulic lubricant John Deere Hy-Gard fluid **Total time engine was operated:** 29.5 hours

ENGINE: Make John Deere Diesel **Type** six cylinder vertical with turbocharger and air to air aftercooler **Serial No.** *RG6081H098352* **Crankshaft** lengthwise **Rated engine speed** 2200 **Bore and stroke** 4.56" x 5.06" (115.8 mm x 128.5 mm) **Compression ratio** 16.5 to 1 **Displacement** 496 cu in (8134 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** two paper elements and aspirator **Oil filter** one full flow cartridge **Oilcooler** engine coolant heat exchanger for crankcase oil, radiator for hydraulic and transmission oil **Fuel filter** one paper element and prestrainer **Fuel cooler** radiator for pump return fuel **Muffler** vertical **Cooling medium temperature control** 2 thermostats and variable speed fan

ENGINE OPERATING PARAMETERS: **Fuel rate:** 73.0 - 80.5 lb/h (33.1 - 36.5 kg/h) **High idle:** 2275 - 2325 rpm **Turbo boost:** nominal 16.1 - 20.5 psi (111 - 141 kPa) as measured 19.0 psi (131 kPa)

CHASSIS: **Type** tracklayer-rubber tracked **Serial No.** *RW8210T901069* **Track width** 88.0" (2235 mm) to 119.5 (3035 mm) **Length of track on ground** 89.0" (2261 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio with full range operator controlled power shift **Nominal travel speeds mph (km/h)** first 1.16 (1.87) second 1.49 (2.39) third 1.89 (3.04) fourth 2.41 (3.88) fifth 2.92 (4.70) sixth 3.30 (5.31) seventh 3.73 (6.01) eighth 4.21 (6.78) ninth 4.75 (7.65) tenth 5.36 (8.63) eleventh 6.07 (9.77) twelfth 6.85 (11.02) thirteenth 8.71 (14.02) fourteenth 11.13 (17.91) fifteenth 14.17 (22.80) sixteenth 18.10 (29.13) reverse 1.01 (1.63), 2.55 (4.10), 2.88 (4.63), 5.53 (8.90) @ 1600 engine rpm **Clutch** wet multiple disc hydraulically actuated by foot pedal **Brakes** wet multiple disc hydraulically actuated foot pedal **Steering** electro-hydraulic differential steering controlled by steering wheel **Power take-off** 1000 rpm at 2179 engine rpm **Unladen tractor mass** 25390 lb (11517 kg)

POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
MAXIMUM POWER AND FUEL CONSUMPTION					
Rated Engine Speed—(PTO speed—1009 rpm)					
188.13 (140.29)	2200	10.95 (41.45)	0.411 (0.250)	17.18 (3.38)	
Maximum Power (2 hours)					
216.32 (161.31)	2000	11.66 (44.16)	0.381 (0.232)	18.54 (3.65)	
VARYING POWER AND FUEL CONSUMPTION					
188.13 (140.29)	2200	10.95 (41.45)	0.411 (0.250)	17.18 (3.38)	Air temperature
164.39 (122.58)	2253	10.06 (38.08)	0.433 (0.263)	16.34 (3.22)	77°F (25°C)
123.52 (92.11)	2263	8.28 (31.34)	0.474 (0.288)	14.92 (2.94)	Relative humidity
82.73 (61.69)	2271	6.54 (24.75)	0.558 (0.340)	12.66 (2.49)	42%
41.46 (30.92)	2282	4.63 (17.52)	0.789 (0.480)	8.96 (1.77)	Barometer
2.50 (1.86)	2290	3.01 (11.41)	8.523 (5.185)	0.83 (0.16)	28.91" Hg (97.90 kPa)
Maximum Torque - 663 lb.-ft. (898 Nm) at 1200 rpm					
Maximum Torque Rise - 47.5%					
Torque rise at 1800 engine rpm - 36%					

DRAWBAR PERFORMANCE(Unballasted) FUEL CONSUMPTION CHARACTERISTICS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Temp. °F cool- ing med	°C Air dry bulb	Barom. inch Hg (kPa)
Maximum Power—9th Gear									
158.81 (118.43)	12833 (57.08)	4.64 (7.47)	2195	2.04	0.483 (0.294)	14.63 (2.88)	196 (91)	66 (19)	28.67 (97.09)
75% of Pull at Maximum Power—9th Gear									
123.32 (91.96)	9609 (42.74)	4.81 (7.75)	2258	1.18	0.534 (0.325)	13.24 (2.61)	191 (88)	72 (22)	28.66 (97.05)
50% of Pull at Maximum Power—9th Gear									
82.88 (61.80)	6407 (28.50)	4.85 (7.81)	2267	0.95	0.634 (0.385)	11.15 (2.20)	186 (85)	76 (24)	28.64 (96.99)
75% of Pull at Reduced Engine Speed—11th Gear									
123.26 (91.91)	9622 (42.80)	4.80 (7.73)	1766	1.26	0.461 (0.280)	15.33 (3.02)	194 (90)	74 (23)	28.65 (97.02)
50% of Pull at Reduced Engine Speed—11th Gear									
82.84 (61.78)	6392 (28.43)	4.86 (7.82)	1779	0.79	0.527 (0.320)	13.42 (2.64)	187 (86)	76 (24)	28.62 (96.92)

DRAWBAR PERFORMANCE(Unballasted)

MAXIMUM POWER IN SELECTED GEARS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Consumption Hp.hr/gal (kW.h/l)	Temp.°F (°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
3rd Gear									
108.70 (81.05)	24479 (108.89)	1.67 (2.68)	2255	13.87	0.591 (0.360)	11.95 (2.35)	186 (85)	62 (17)	28.95 (98.04)
4th Gear									
128.72 (95.99)	23422 (104.18)	2.06 (3.32)	2159	12.78	0.545 (0.332)	12.96 (2.55)	188 (86)	62 (17)	28.70 (97.19)
5th Gear									
153.39 (114.39)	22968 (102.16)	2.50 (4.03)	2137	11.55	0.514 (0.313)	13.75 (2.71)	195 (90)	64 (18)	28.70 (97.19)
6th Gear									
163.54 (121.95)	22979 (102.21)	2.67 (4.30)	2039	12.48	0.500 (0.304)	14.14 (2.79)	190 (88)	64 (18)	28.69 (97.16)
7th Gear									
174.94 (130.45)	21059 (93.68)	3.12 (5.01)	2001	8.10	0.468 (0.285)	15.09 (2.97)	193 (89)	65 (18)	28.69 (97.16)
8th Gear									
179.84 (134.11)	18592 (82.70)	3.63 (5.84)	2001	5.24	0.455 (0.277)	15.54 (3.06)	196 (91)	65 (18)	28.68 (97.12)
9th Gear									
182.73 (136.26)	16486 (73.33)	4.16 (6.69)	1999	3.63	0.448 (0.272)	15.78 (3.11)	197 (91)	65 (18)	28.67 (97.09)
10th Gear									
183.71 (137.00)	14537 (64.66)	4.74 (7.63)	2000	2.57	0.447 (0.272)	15.82 (3.12)	197 (92)	67 (19)	28.66 (97.05)
11th Gear									
183.33 (136.71)	12738 (56.66)	5.40 (8.69)	1997	1.96	0.448 (0.272)	15.79 (3.11)	197 (91)	69 (21)	28.66 (97.05)
12th Gear									
182.43 (136.04)	11169 (49.68)	6.13 (9.86)	1999	1.50	0.450 (0.274)	15.69 (3.09)	200 (93)	70 (21)	28.66 (97.05)
13th Gear									
179.08 (133.54)	8561 (38.08)	7.84 (12.63)	2003	1.03	0.460 (0.280)	15.35 (3.02)	200 (93)	71 (22)	28.66 (97.05)

REPAIRS AND ADJUSTMENTS: No repairs or adjustments.

NOTE: The 8210T engine has an electronic control system which provides a vehicle protection system to avoid overloading the drive train. This system provides two different engine power levels. The engine produces up to 165 PTO hp when the transmission is in forward gears 1 through 4 and the PTO is not engaged. The engine produces up to 185 PTO Hp in all other applications.

REMARKS: All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. For the maximum power tests the fuel temperature at the injection pump inlet was maintained at 117°F(47°C). The performance figures on this summary were taken from a test conducted under the OECD Code II test code procedure.

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. **1774**, Nebraska Summary 309, July 7, 2000.

Leonard L. Bashford
Director

G. J. Hoffman
M. F. Kocher
R. D. Grisso Jr.
Board of Tractor Test Engineers

TRACTOR SOUND LEVEL WITH CAB

dB(A)

At no load in 9th gear	76.6
Transport speed - no load - 16th gear	79.2
Bystander in 16th Gear	89.7

TIRES, BALLAST AND WEIGHT

	With Ballast	Without Ballast
Track width	16.0 in (406 mm)	16.0 in (406 mm)
Ballast - Cast iron(front)	2045 lb (928 kg)	None
Height of Drawbar	18.5 in (470 mm)	18.5 in (470 mm)
Static Weight with operator	27610 lb(12524 kg)	25565 lb(11596 kg)

DRAWBAR PERFORMANCE
(Ballasted - 2000 RPM)
MAXIMUM POWER IN SELECTED GEARS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Temp.°F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
3rd Gear									
115.70 (86.28)	26168 (116.40)	1.66 (2.67)	2251	14.27	0.582 (0.354)	12.15 (2.39)	189 (87)	62 (17)	28.65 (97.02)
4th Gear									
140.02 (104.41)	24890 (110.71)	2.11 (3.40)	2118	9.28	0.508 (0.309)	13.90 (2.74)	192 (89)	60 (16)	28.67 (97.09)
5th Gear									
163.28 (121.76)	24575 (109.31)	2.49 (4.01)	2086	10.13	0.493 (0.300)	14.33 (2.82)	189 (87)	61 (16)	28.68 (97.12)
6th Gear									
174.28 (129.96)	23825 (105.98)	2.74 (4.41)	2001	8.68	0.470 (0.286)	15.02 (2.96)	197 (91)	62 (17)	28.69 (97.16)
7th Gear									
180.06 (134.27)	21161 (94.13)	3.19 (5.14)	2000	6.07	0.455 (0.277)	15.54 (3.06)	199 (93)	62 (17)	28.69 (97.16)
8th Gear									
183.35 (136.72)	18709 (83.22)	3.68 (5.91)	2000	4.11	0.447 (0.272)	15.82 (3.12)	197 (92)	64 (18)	28.70 (97.19)
9th Gear									
184.86 (137.85)	16543 (73.59)	4.19 (6.74)	2000	3.14	0.444 (0.270)	15.92 (3.14)	201 (94)	64 (18)	28.70 (97.19)
10th Gear									
184.94 (137.91)	14557 (64.75)	4.76 (7.67)	2001	2.46	0.445 (0.271)	15.89 (3.13)	196 (91)	66 (19)	28.72 (97.26)
11th Gear									
183.77 (137.04)	12736 (56.65)	5.41 (8.71)	1997	1.84	0.448 (0.272)	15.78 (3.11)	197 (91)	66 (19)	28.72 (97.26)
12th Gear									
182.70 (136.24)	11145 (49.57)	6.15 (9.89)	2004	1.53	0.449 (0.273)	15.72 (3.10)	197 (92)	67 (19)	28.72 (97.26)
13th Gear									
178.38 (133.02)	8531 (37.95)	7.84 (12.62)	1999	1.14	0.460 (0.280)	15.38 (3.03)	199 (93)	68 (20)	28.73 (97.29)

DRAWBAR PERFORMANCE
(Ballasted - 2200 RPM)
MAXIMUM POWER IN SELECTED GEARS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Temp. °F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
3rd Gear									
117.11 (87.33)	26230 (116.68)	1.67 (2.69)	2251	13.41	0.575 (0.349)	12.30 (2.42)	188 (87)	62 (17)	28.65 (97.02)
4th Gear									
135.21 (100.83)	22325 (99.31)	2.27 (3.66)	2203	6.14	0.512 (0.311)	13.81 (2.72)	193 (89)	61 (16)	28.66 (97.05)
5th Gear									
157.35 (117.34)	21357 (95.00)	2.76 (4.45)	2199	5.57	0.488 (0.297)	14.49 (2.85)	190 (88)	60 (16)	28.67 (97.09)
6th Gear									
158.26 (118.02)	18752 (83.41)	3.16 (5.09)	2202	4.26	0.486 (0.295)	14.55 (2.87)	191 (88)	62 (17)	28.69 (97.16)
7th Gear									
160.65 (119.80)	16685 (74.22)	3.61 (5.81)	2196	3.14	0.478 (0.291)	14.78 (2.91)	196 (91)	63 (17)	28.69 (97.16)
8th Gear									
160.47 (119.66)	14595 (64.92)	4.12 (6.64)	2202	2.23	0.478 (0.290)	14.80 (2.92)	195 (91)	63 (17)	28.70 (97.19)
9th Gear									
160.01 (119.32)	12849 (57.15)	4.67 (7.52)	2202	1.92	0.479 (0.292)	14.75 (2.90)	198 (92)	64 (18)	28.71 (97.22)
10th Gear									
158.21 (117.98)	11215 (49.88)	5.29 (8.51)	2202	1.69	0.487 (0.296)	14.50 (2.86)	195 (90)	65 (18)	28.72 (97.26)
11th Gear									
156.02 (116.35)	9753 (43.38)	6.00 (9.65)	2200	1.22	0.493 (0.300)	14.33 (2.82)	196 (91)	66 (19)	28.72 (97.26)
12th Gear									
153.06 (114.14)	8470 (37.68)	6.78 (10.91)	2199	1.06	0.503 (0.306)	14.06 (2.77)	196 (91)	67 (19)	28.72 (97.26)
13th Gear									
148.28 (110.57)	6430 (28.60)	8.65 (13.92)	2200	0.83	0.520 (0.317)	13.58 (2.67)	198 (92)	69 (21)	28.73 (97.29)

THREE POINT HITCH PERFORMANCE (OECD Static Test)

CATEGORY: III

Quick Attach: yes

Maximum Force Exerted Through Whole Range: 15749 lbs (70.1 kN)

i) Opening pressure of relief valve: NA

Sustained pressure at compensator cutoff: 2900 psi (200 bar) High flow option 2940 psi (203 bar)
two outlet sets combined

ii) Pump delivery rate at minimum pressure and rated engine speed: 34.7 GPM(131.4 l/min) 43.3 GPM(163.9 l/min)

iii) Pump delivery rate at maximum hydraulic power: 32.8 GPM(124.2 l/min) 41.0 GPM(155.2 l/min)

Delivery pressure: 2540 psi (175 bar) 2370 psi (163 bar)

Power: 48.6 HP (36.2 kW) 56.7 HP (42.3 kW)


single outlet set

ii) Pump delivery rate at minimum pressure and rated engine speed: 31.4 GPM(118.9 l/min) 31.2 GPM(118.1 l/min)

iii) Pump delivery rate at maximum hydraulic power: 29.9 GPM(113.2 l/min) 28.2 GPM(106.7 l/min)

Delivery pressure: 2200 psi (152 bar) 2230 psi (154 bar)

Power: 38.4 HP (28.6 kW) 36.7 HP (27.4 kW)

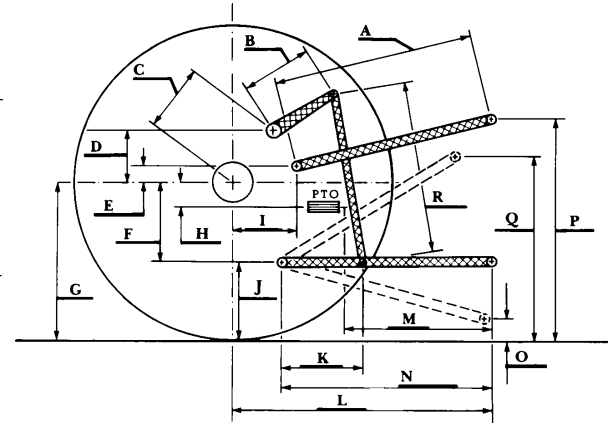

THREE POINT HITCH PERFORMANCE

Observed Maximum Pressure psi.(bar): 2890(199)

Location: lift cylinder

Hydraulic oil temperature: °F(°C): 148(64)

Location: hydraulic sump

Category: III

Quick attach: yes

SAE Static Test—System pressure 2575 psi (177 Bar)

Hitch point distance to ground level in.(mm) 8.0(203) 16.1(408) 24.1(613) 32.1(814) 40.0(1016)

Lift force on frame lb 15904 15964 16354 16348 15410

" " " " " (kN) (70.7) (71.0) (72.8) (72.7) (68.6)

ASAE Static Test—System pressure 2850 psi (196 Bar)

Hitch point distance to ground level in.(mm) 8.0(203) 16.1(408) 24.1(613) 32.1(814) 40.0(1016)

Lift force on frame lb 17671 17634 18059 18053 16981

" " " " " (kN) (78.6) (78.4) (80.3) (80.3) (52.7)

HITCH DIMENSIONS AS TESTED—NO LOAD

	inch	mm
A	28.9	733
B	19.5	495
C	22.9	582
D	22.2	565
E	10.2	260
F	11.0	280
G	33.6	853
H	3.2	81
I	15.6	395
J	22.6	573
K	28.3	718
L	48.5	1231
*L'	52.0	1320
M	25.5	647
N	41.6	1056
O	8.0	203
P	40.8	1037
Q	39.1	993
R	42.9	1089

*L' to Quick Attach ends



JOHN DEERE 8210T DIESEL

Agricultural Research Division
Institute of Agriculture and Natural Resources
University of Nebraska—Lincoln
Darrell Nelson, Dean and Director