

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

---

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F. Larsen

---

2004

## Tractor Test 1837B: Case IH Farmall 55

Nebraska Tractor Test Lab

University of Nebraska-Lincoln, [tractortestlab@unl.edu](mailto:tractortestlab@unl.edu)

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Energy Systems Commons](#), [History of Science, Technology, and Medicine Commons](#), [Other Mechanical Engineering Commons](#), [Physical Sciences and Mathematics Commons](#), [Science and Mathematics Education Commons](#), and the [United States History Commons](#)

---

Nebraska Tractor Test Lab, "Tractor Test 1837B: Case IH Farmall 55" (2004). *Nebraska Tractor Tests*. 2312.

<https://digitalcommons.unl.edu/tractormuseumlit/2312>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

# NEBRASKA TRACTOR TEST 1837B

## CASE IH DX 55 DIESEL

## ALSO CASE IH FARMALL 55 DIESEL

## 12 SPEED

### POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
---------------------	--------------------------------	-----------------	-----------------------	-----------------------	--------------------------------

### MAXIMUM POWER AND FUEL CONSUMPTION

Rated Engine Speed—(PTO speed—589 rpm)					
48.01 (35.80)	2700	3.95 (14.93)	0.577 (0.351)	12.17 (2.40)	
Standard Power Take-off Speed(540 rpm)					
47.80 (35.65)	2475	3.66 (13.87)	0.538 (0.327)	13.05 (2.57)	

### VARYING POWER AND FUEL CONSUMPTION

48.01 (35.80)	2700	3.95 (14.93)	0.577 (0.351)	12.17 (2.40)	Air temperature
42.46 (31.66)	2801	3.50 (13.26)	0.579 (0.352)	12.12 (2.39)	75°F (24°C)
32.17 (23.99)	2841	2.82 (10.68)	0.616 (0.374)	11.41 (2.25)	Relative humidity
21.75 (16.22)	2871	2.26 (8.57)	0.731 (0.445)	9.61 (1.89)	34%
10.88 (8.11)	2913	1.75 (6.63)	1.130 (0.688)	6.21 (1.22)	Barometer
0.61 (0.46)	2938	1.37 (5.18)	15.732 (9.569)	0.45 (0.09)	28.84"Hg (97.66 kPa)

Maximum Torque 122 lb.-ft. (165 Nm) at 1657 rpm  
Maximum Torque Rise - 30.6%  
Torque rise at 2203 rpm - 20%

### TRACTOR SOUND LEVEL WITHOUT CAB

	Front Wheel Drive Disengaged	
	dB(A)	Engaged dB(A)
At no load in 7th (M3) gear	89.0	89.0
Bystander	--	--

### TIRES AND WEIGHT

**Rear Tires**—No., size, ply & psi (kPa)  
**Front Tires**—No., size, ply & psi (kPa)  
**Height of Drawbar**  
**Static Weight with operator**—Rear  
— Front  
— Total

### Tested Without Ballast

Two 18.4-24; 8:12 (85)  
Two 12-16.5; 8:12 (85)  
17.0 in (430 mm)  
3035 lb (1377 kg)  
1825 lb (828 kg)  
4860 lb (2205 kg)

**Location of Test:** Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln Nebraska 68583-0832

**Dates of Test:** April 29-30, 2004

**Manufacturer:** CNH America LLC, 700 State Sreet, Racine, Wi. 53404

**FUEL, OIL and TIME:** Fuel No. 2 Diesel Specific gravity converted to 60°/60° F (15°/15°C) 0.8432 Fuel weight 7.021 lbs/gal (0.841 kg/l) Oil SAE 15W40 API service classification CF-4/SG Transmission and hydraulic lubricant Case IH Hytran ultra fluid Front axle lubricant Case IH Hytran ultra fluid Total time engine was operated 11.0 hours

**ENGINE:** Make ISM Diesel Type four cylinder vertical with turbocharger Serial No. 27999 Crankshaft lengthwise Rated engine speed 2700 Bore and stroke 3.307" x 3.937" (84.0 mm x 100.0 mm) Compression ratio 22.4 to 1 Displacement 135 cu in (2216 ml) Starting system 12 volt Lubrication pressure Air cleaner two paper elements Oil filter one full flow cartridge Oil cooler engine coolant heat exchanger for crankcase oil, radiator for hydraulic and transmission oil Fuel filter one paper element Muffler underhood Exhaust horizontal Cooling medium temperature control one thermostat

**ENGINE OPERATING PARAMETERS:** Fuel rate: 25.5 - 28.0 lb/h (11.6 - 12.7 kg/h) High idle: 2850 - 2950 rpm Turbo boost: nominal 8.0 - 10.1 psi (55 - 70 kPa) as measured 9.4 psi (65 kPa)

**CHASSIS:** Type front wheel assist Serial No. HX10016 Tread width rear 52.8" (1341 mm) to 76.3" (1939 mm) front 56.4" (1432 mm) Wheelbase 74.8" (1900 mm) Hydraulic control system direct engine drive Transmission selective gear fixed ratio Nominal travel speeds mph (km/h) first 1.16 (1.86) second 1.56 (2.51) third 2.04 (3.29) fourth 2.62 (4.22) fifth 2.90 (4.67) sixth 3.93 (6.32) seventh 5.15 (8.28) eighth 6.61 (10.63) ninth 8.17 (13.15) tenth 11.06 (17.80) eleventh 14.48 (23.30) twelfth 18.59 (29.91) reverse 1.17 (1.88), 1.58 (2.55), 2.07 (3.33), 2.66 (4.28), 2.94 (4.73), 3.98 (6.41), 5.21 (8.39), 6.69 (10.77), 8.28 (13.32), 11.21 (18.04), 14.68 (23.62), 18.83 (30.31) Clutch single dry disc operated by foot pedal Brakes single wet disc operated by two foot pedals which can be locked together Steering hydrostatic Power take-off 540 rpm at 2475 engine rpm Unladen tractor mass 4685 lb (2125 kg)

## HYDRAULIC PERFORMANCE

CATEGORY: I, II

Quick Attach: None

OECD Static test

Maximum force exerted through whole range: 4028 lbs (17.9 kN) Category I  
3254 lbs (14.5 kN) Category II

i) Sustained pressure of the open relief valve: 2550 psi (176 bar)  
ii) Pump delivery rate at minimum pressure and rated engine speed: 10.9 GPM (41.3 l/min)

iii) Pump delivery rate at maximum hydraulic power: 10.7 GPM (40.5 l/min)  
Delivery pressure: 1965 psi (135 bar)  
Power: 12.3 HP (9.1 kW)

## THREE POINT HITCH PERFORMANCE(SAE Static test)

Observed maximum pressure psi. (bar) 2520 (174)  
Location: hydraulic manifold  
Hydraulic oil temperature: °F (°C) 145 (63)  
Location: pump inlet  
Category: II  
Quick attach: none

### Category II

System pressure 2320 psi (160 Bar)

Hitch point distance to ground level in. (mm)	7.3 (184)	14.4 (364)	21.3 (540)	28.3 (718)	35.3 (896)
Lift force on frame lb	4409	4558	4354	4073	3849
" " " " " (kN)	(19.6)	(20.3)	(19.4)	(18.1)	(17.1)

**REPAIRS AND ADJUSTMENTS:** The fuel tank was found to be leaking following the PTO tests.

**Note:** Report reprinted, supplemental for Case IH Farmall 55 Diesel, May 2009.

**REMARKS:** All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. This tractor did not meet manufacturer's claim of 11.6 GPM (43.9 lpm) hydraulic flow. For the maximum power tests, the fuel temperature at the injection pump inlet was maintained at 104°F (40°C).

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. **1837B**.


\_\_\_\_\_

Date

\_\_\_\_\_

Director

	Category I		Category II	
	inch	mm	inch	mm
A	26.3	667	25.4	644
B	11.8	300	11.8	300
C	13.5	344	13.5	344
D	13.5	342	13.5	342
E	12.1	307	12.1	307
F	5.2	132	5.2	132
G	26.0	660	26.0	660
H	0.5	13	0.5	13
I	8.8	223	8.8	223
J	20.8	528	20.8	528
K	19.3	490	19.3	490
L	34.6	879	34.6	879
M	22.9	582	22.9	582
N	31.5	800	31.5	800
O	7.3	184	7.3	184
P	38.8	986	39.8	1011
Q	31.6	803	31.5	800
R	24.1	613	24.1	613

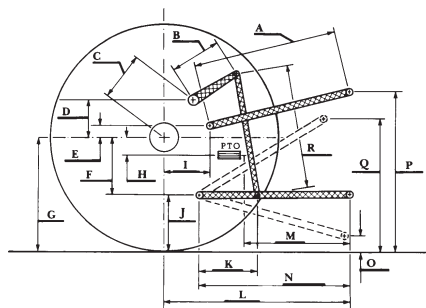

HITCH DIMENSIONS AS TESTED - NO LOAD



Case IH Farmall 55 Diesel

Institute of Agriculture and Natural Resources  
University of Nebraska-Lincoln

\_\_\_\_\_

Board of Tractor Test Engineers