

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F.
Larsen

2009

Test 1861A: Challenger MT835C

Nebraska Tractor Test Lab

University of Nebraska-Lincoln, tractortestlab@unl.edu

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Energy Systems Commons](#), [History of Science, Technology, and Medicine Commons](#), [Other Mechanical Engineering Commons](#), [Physical Sciences and Mathematics Commons](#), [Science and Mathematics Education Commons](#), and the [United States History Commons](#)

Nebraska Tractor Test Lab, "Test 1861A: Challenger MT835C" (2009). *Nebraska Tractor Tests*. 2361.
<https://digitalcommons.unl.edu/tractormuseumlit/2361>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

NEBRASKA OECD TRACTOR TEST 1861A – SUMMARY 488A

CHALLENGER MT845B DIESEL

ALSO CHALLENGER MT835C DIESEL

16 SPEED

POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
MAXIMUM POWER AND FUEL CONSUMPTION					
Rated Engine Speed—(PTO speed—1061 rpm)					
359.53 (268.10)	2100	23.26 (88.05)	0.456 (0.277)	15.46 (3.04)	
Standard Power Take-off Speed - (PTO speed - 1000 rpm)					
387.05 (288.62)	1979	23.76 (89.93)	0.433 (0.263)	16.29 (3.21)	
Maximum Power (1 hour)					
402.32 (300.01)	1800	23.46 (88.81)	0.411 (0.250)	17.15 (3.38)	

VARYING POWER AND FUEL CONSUMPTION

359.53 (268.10)	2100	23.26 (88.05)	0.456 (0.277)	15.46 (3.04)	Air temperature
321.00 (239.37)	2199	21.81 (82.57)	0.479 (0.291)	14.72 (2.90)	75°F (24°C)
240.57 (179.39)	2199	18.28 (69.20)	0.536 (0.326)	13.16 (2.59)	Relative humidity
159.66 (119.05)	2199	14.22 (53.85)	0.628 (0.382)	11.22 (2.21)	44%
79.33 (59.15)	2199	9.90 (31.66)	0.880 (0.535)	8.01 (1.58)	Barometer
2.12 (1.58)	2199	6.30 (23.84)	20.990 (12.767)	0.34 (0.07)	29.04" Hg (98.34 kPa)

Maximum Torque - 1423 lb.-ft. (1929 Nm) at 1300 rpm
Maximum Torque Rise - 58.2%
Torque rise at 1700 engine rpm - 38%
Power increase at 1800 engine rpm - 11.9%

DRAWBAR PERFORMANCE (Unballasted)

FUEL CONSUMPTION CHARACTERISTICS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Temp.°F (°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
Maximum Power—6th Gear									
313.27 (233.61)	26013 (115.71)	4.52 (7.27)	2105	2.03	0.530 (0.322)	13.30 (2.62)	190 (88)	54 (12)	28.85 (97.70)
75% of Pull at Maximum Power—6th Gear									
249.58 (186.11)	19614 (87.25)	4.77 (7.68)	2199	0.93	0.575 (0.350)	12.26 (2.42)	189 (87)	54 (12)	28.85 (97.70)
50% of Pull at Maximum Power—6th Gear									
167.37 (124.80)	13094 (58.25)	4.79 (7.71)	2196	0.35	0.690 (0.420)	10.22 (2.01)	189 (87)	54 (12)	28.85 (97.70)
75% of Pull at Reduced Engine Speed—9th Gear									
249.52 (186.07)	19717 (87.71)	4.75 (7.64)	1533	0.96	0.459 (0.279)	15.36 (3.03)	190 (88)	54 (12)	28.85 (97.70)
50% of Pull at Reduced Engine Speed—9th Gear									
167.17 (124.66)	13082 (58.19)	4.79 (7.71)	1538	0.33	0.529 (0.321)	13.34 (2.63)	188 (87)	55 (13)	28.84 (97.66)

Location of test: Nebraska Tractor Test Laboratory,
University of Nebraska, Lincoln, Nebraska 68583-0832

Dates of tests: October 4 - 26, 2005

Manufacturer: AGCO Corporation, 4205 River
Green Parkway, Duluth Ga 30096

FUEL, OIL and TIME: Fuel No. 2 Diesel **Specific gravity converted to 60°/60°F (15°/15°C)** 0.8468
Fuel weight 7.051 lbs/gal (0.845 kg/l) **Oil** SAE 10W-30 **API service classification** CI-4
Transmission and hydraulic lubricant AGCO Trandraulic 821 XL fluid **Total time engine was operated:** 50.5 hours

ENGINE: Make Caterpillar Diesel **Type** six cylinder vertical with turbocharger and air to air aftercooler **Serial No.** *JAS00105* **Crankshaft** lengthwise **Rated engine speed** 2100 **Bore and stroke** 5.402" x 6.752" (137.2 mm x 171.5 mm) **Compression ratio** 16.5 to 1 **Displacement** 928 cu in (15213 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** two paper elements and aspirator **Oil filter** one full flow cartridge **Oil cooler** engine coolant heat exchanger for crankcase oil, radiator for hydraulic and transmission oil **Fuel filter** two paper elements and water separator **Fuel cooler** radiator for returned fuel **Muffler** vertical **Cooling medium temperature control** 2 thermostats

ENGINE OPERATING PARAMETERS: **Fuel rate:** 159.0 - 168.0 lb/h (72.1 - 76.2 kg/h) **High idle:** 2175 - 2225 rpm **Turbo boost:** nominal 23.2 - 27.6 psi (160 - 190 kPa) as measured 25.8 psi (178 kPa)

CHASSIS: Type tracklayer-rubber tracked **Serial No.** *AGCMT845EBBP60473* **Track width** 100.0" (2540 mm) to 120.0" (3048 mm) **Length of track on ground** 124.3" (3157 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio with full range operator controlled power shift **Nominal travel speeds mph (km/h)** first 1.67 (2.69) second 2.13 (3.43) third 2.68 (4.31) fourth 3.41 (5.48) fifth 4.06 (6.54) sixth 4.58 (7.37) seventh 5.16 (8.31) eighth 5.80 (9.34) ninth 6.53 (10.51) tenth 7.34 (11.82) eleventh 8.29 (13.34) twelfth 9.33 (15.02) thirteenth 11.10 (17.87) fourteenth 14.11 (22.71) fifteenth 17.86 (28.75) sixteenth 24.86 (40.00) at 2300 rpm, reverse 1.34 (2.16), 3.24 (5.22), 3.66 (5.89), 8.89 (14.30) **Clutch** wet multiple disc hydraulically actuated by foot pedal **Brakes** wet multiple disc hydraulically actuated foot pedal **Steering** electro-hydraulic differential steering controlled by steering wheel **Power take-off** 1000 rpm at 1980 engine rpm **Unladen tractor mass** 42900 lb (19459 kg)

DRAWBAR PERFORMANCE

Unballasted at 2100 RPM

MAXIMUM POWER IN SELECTED GEARS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Consumption Hp.hr/gal (kW.h/l)	Temp.°F (°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
3rd Gear									
277.87 (207.21)	42532 (189.19)	2.45 (3.94)	2116	9.13	0.596 (0.362)	11.84 (2.33)	189 (87)	43 (6)	28.96 (98.07)
4th Gear									
297.55 (221.88)	33856 (150.60)	3.30 (5.30)	2099	3.83	0.559 (0.340)	12.61 (2.48)	189 (87)	44 (7)	28.97 (98.10)
5th Gear									
311.33 (232.16)	29366 (130.63)	3.98 (6.40)	2099	2.68	0.536 (0.326)	13.15 (2.59)	189 (87)	48 (9)	28.99 (98.17)
6th Gear									
313.27 (233.61)	26013 (115.71)	4.52 (7.27)	2105	2.03	0.530 (0.322)	13.30 (2.62)	190 (88)	54 (12)	28.85 (97.70)
7th Gear									
310.01 (231.17)	22744 (101.17)	5.11 (8.23)	2098	1.40	0.538 (0.327)	13.12 (2.58)	190 (88)	50 (10)	28.87 (97.77)
8th Gear									
309.20 (230.57)	20076 (89.30)	5.78 (9.29)	2097	0.98	0.538 (0.327)	13.11 (2.58)	190 (88)	50 (10)	28.87 (97.77)
9th Gear									
302.44 (225.53)	17392 (77.36)	6.52 (10.50)	2101	0.70	0.545 (0.332)	12.94 (2.55)	190 (88)	52 (11)	28.86 (97.73)
10th Gear									
303.50 (226.32)	15479 (68.85)	7.35 (11.83)	2099	0.49	0.541 (0.329)	13.04 (2.57)	190 (88)	53 (12)	28.86 (97.73)
11th Gear									
292.67 (218.24)	13218 (58.79)	8.30 (13.36)	2099	0.32	0.564 (0.343)	12.50 (2.46)	191 (88)	54 (12)	28.86 (97.73)

REPAIRS AND ADJUSTMENTS: No repairs or adjustments.

NOTE: Report reissued, supplemental for Challenger MT 835C Diesel, July, 2009.

REMARKS: All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. For the maximum power tests the fuel temperature at the injection pump inlet was maintained at 118°F(48°C). The performance figures on this summary were taken from a test conducted under the OECD Code II test procedure.

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. **1861A**, Nebraska Summary 488A, July 17, 2009.

Roger M. Hoy
Director

M.F. Kocher
V.I. Adamchuk
J.A. Smith
Board of Tractor Test Engineers

TRACTOR SOUND LEVEL WITH CAB

dB(A)

At no load in 6th gear	74.0
Bystander	--

TIRES, BALLAST AND WEIGHT

	With Ballast	Without Ballast
Track width	30.0 in (760 mm)	30.0 in (760 mm)
Ballast - Cast iron(front end)	4280 lb (1941 kg)	None
- Cast iron(front idlers)	2645 lb (1200 kg)	None
Height of Drawbar	20.0 in (510 mm)	19.5 in (495 mm)
Static Weight with operator	50000 lb(22679 kg)	43075 lb(19538 kg)

DRAWBAR PERFORMANCE
(Unballasted at 1800 RPM)
MAXIMUM POWER IN SELECTED GEARS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Temp. °F(°C) cool- ing med	Barom. inch Hg (kPa)		
3rd Gear									
277.50 (206.93)	42490 (189.00)	2.45 (3.94)	2116	9.31	0.596 (0.363)	11.83 (2.33)	189 (87)	43 (6)	28.96 (98.07)
4th Gear									
308.38 (229.96)	38095 (169.45)	3.04 (4.89)	2011	7.95	0.552 (0.336)	12.78 (2.52)	190 (88)	60 (16)	29.00 (98.21)
5th Gear									
338.71 (252.58)	36345 (161.67)	3.49 (5.62)	1896	5.69	0.507 (0.308)	13.91 (2.74)	190 (88)	50 (10)	28.99 (98.17)
6th Gear									
346.26 (258.20)	34480 (153.38)	3.77 (6.06)	1800	4.50	0.484 (0.294)	14.57 (2.87)	191 (88)	52 (11)	29.00 (98.21)
7th Gear									
346.82 (258.63)	30160 (134.16)	4.31 (6.94)	1799	2.94	0.483 (0.294)	14.60 (2.88)	191 (88)	51 (11)	28.87 (97.77)
8th Gear									
350.76 (261.56)	26818 (119.29)	4.90 (7.89)	1800	2.13	0.476 (0.290)	14.81 (2.92)	191 (88)	50 (10)	28.87 (97.77)
9th Gear									
348.35 (259.77)	23572 (104.85)	5.54 (8.92)	1800	1.54	0.479 (0.291)	14.72 (2.90)	191 (88)	53 (12)	28.86 (97.73)
10th Gear									
350.80 (261.59)	20989 (93.36)	6.27 (10.09)	1800	1.10	0.475 (0.289)	14.83 (2.92)	191 (88)	54 (12)	28.86 (97.73)
11th Gear									
344.15 (256.63)	18152 (80.74)	7.11 (11.44)	1805	0.77	0.485 (0.295)	14.54 (2.87)	191 (88)	54 (12)	28.85 (97.70)
12th Gear									
342.91 (255.71)	16037 (71.34)	8.02 (12.90)	1804	0.55	0.483 (0.294)	14.58 (2.87)	191 (88)	54 (12)	28.85 (97.70)

DRAWBAR PERFORMANCE
(Ballasted at 1800 RPM)
MAXIMUM POWER IN SELECTED GEARS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Temp.°F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
2nd Gear									
258.06 (192.43)	48440 (215.47)	2.00 (3.22)	2179	9.89	0.619 (0.377)	11.39 (2.24)	189 (87)	50 (10)	29.16 (98.75)
3rd Gear									
295.86 (220.62)	45327 (201.63)	2.45 (3.94)	2073	8.00	0.566 (0.344)	12.46 (2.45)	189 (87)	50 (10)	29.16 (98.75)
4th Gear									
332.82 (248.19)	43215 (192.23)	2.89 (4.65)	1882	6.26	0.515 (0.313)	13.69 (2.70)	190 (88)	50 (10)	29.15 (98.71)
5th Gear									
348.34 (259.76)	39008 (173.52)	3.35 (5.39)	1799	4.71	0.481 (0.293)	14.66 (2.89)	190 (88)	51 (11)	29.14 (98.68)
6th Gear									
353.69 (263.75)	34672 (154.23)	3.83 (6.16)	1801	3.08	0.474 (0.289)	14.86 (2.93)	191 (88)	52 (11)	29.13 (98.64)
7th Gear									
352.80 (263.08)	30374 (135.11)	4.36 (7.01)	1801	2.19	0.473 (0.288)	14.91 (2.94)	191 (88)	52 (11)	29.12 (98.61)
8th Gear									
355.32 (264.97)	27037 (120.27)	4.93 (7.93)	1800	1.59	0.467 (0.284)	15.11 (2.98)	191 (90)	53 (12)	29.12 (98.61)
9th Gear									
350.02 (261.01)	23567 (104.83)	5.57 (8.96)	1800	1.09	0.475 (0.289)	14.84 (2.92)	191 (88)	54 (12)	29.11 (98.58)
10th Gear									
350.16 (261.11)	20900 (92.97)	6.28 (10.11)	1798	0.80	0.475 (0.289)	14.84 (2.92)	191 (88)	55 (13)	29.10 (98.54)
11th Gear									
341.68 (254.79)	18019 (80.15)	7.11 (11.44)	1800	0.58	0.486 (0.296)	14.50 (2.86)	191 (88)	55 (13)	29.10 (98.54)
12th Gear									
340.09 (253.61)	15909 (70.77)	8.02 (12.90)	1799	0.45	0.486 (0.295)	14.52 (2.86)	191 (88)	56 (13)	29.09 (98.51)

HYDRAULIC PERFORMANCE

CATEGORY: IVN

Quick Attach: yes


OECD Static test

Maximum force exerted through whole range:

20936 lbs (93.1 kN)

	Standard pump	High flow pump
	2 inlets - 2 outlets	3 inlets - 3 outlets
i) Sustained pressure at compensator cutoff:	2943 psi (203 bar)	2974 psi (205 bar)
ii) Pump delivery rate at minimum pressure and rated engine speed:	44.5 GPM (168.5 l/min)	59.0 GPM (223.3 l/min)
iii) Pump delivery rate at maximum		
hydraulic power:	43.0 GPM (162.8 l/min)	57.1 GPM (216.1 l/min)
Delivery pressure:	2692 psi (186 bar)	2479 psi (171 bar)
Power:	67.5 HP (50.4 kW)	82.6 HP (61.6 kW)
	1 inlet - 1 outlet	1 inlet - 1 outlet
i) Sustained pressure at compensator cutoff:	2850 psi (197 bar)	2864 psi (197 bar)
ii) Pump delivery rate at minimum pressure and rated engine speed:	37.3 GPM (141.2 l/min)	41.0 GPM (155.2 l/min)
iii) Pump delivery rate at maximum		
hydraulic power:	36.4 GPM (137.8 l/min)	38.8 GPM (146.9 l/min)
Delivery pressure:	2235 psi (154 bar)	2082 psi (144 bar)
Power:	47.5 HP (35.4 kW)	47.1 HP (35.1 kW)

HITCH DIMENSIONS AS TESTED—NO LOAD

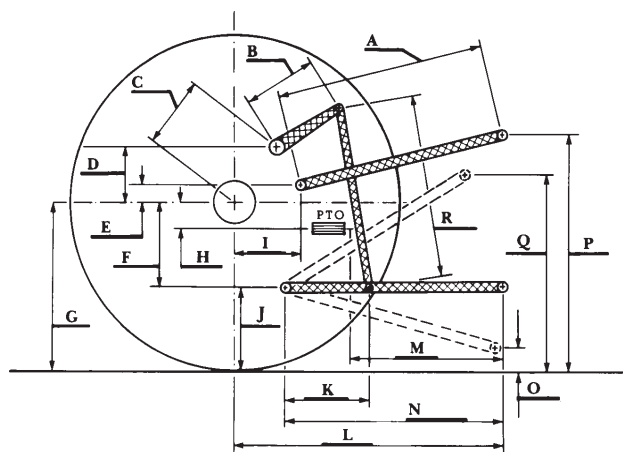

	inch	mm
A	30.2	768
B	21.7	550
C	41.4	1051
D	39.4	1000
E	12.4	315
F	11.8	300
G	35.0	890
H	0.4	10
I	23.0	585
J	23.2	590
K	29.0	737
L	53.9	1369
*L'	60.4	1534
M	26.6	676
N	36.6	929
O	9.0	230
P	50.2	1275
Q	46.5	1181
R	55.9	1421

*L' to Quick Attach ends



CHALLENGER MT845B DIESEL

Institute of Agriculture and Natural Resources
University of Nebraska-Lincoln