

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F.
Larsen

2012

Test 2037: John Deere 5100M

Nebraska Tractor Test Laboratory

University of Nebraska-Lincoln, tractortestlab@unl.edu

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Energy Systems Commons](#), [History of Science, Technology, and Medicine Commons](#), [Other Mechanical Engineering Commons](#), [Physical Sciences and Mathematics Commons](#), [Science and Mathematics Education Commons](#), and the [United States History Commons](#)

Laboratory, Nebraska Tractor Test, "Test 2037: John Deere 5100M" (2012). *Nebraska Tractor Tests*. 2456. <https://digitalcommons.unl.edu/tractormuseumlit/2456>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

NEBRASKA TRACTOR TEST 2037

JOHN DEERE 5100M DIESEL

16 SPEED

POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
MAXIMUM POWER AND FUEL CONSUMPTION					
Rated Engine Speed—(PTO speed—565 rpm)					
84.03 (62.66)	2198	5.32 (20.14)	0.446 (0.271)	15.80 (3.11)	Fuel used during active exhaust regeneration - 0.74 gal (2.79 l) (see Note 1 p.2)
Standard Power Take-off Speed (540 rpm)					
88.68 (66.13)	2100	5.37 (20.13)	0.427 (0.260)	16.50 (3.25)	
Maximum Power (1 hour)					
89.32 (66.60)	1902	5.15 (19.48)	0.406 (0.247)	17.36 (3.42)	

VARYING POWER AND FUEL CONSUMPTION

84.03 (62.66)	2198	5.32 (20.14)	0.446 (0.271)	15.80 (3.11)	Air temperature
73.25 (54.62)	2260	4.90 (18.56)	0.472 (0.287)	14.94 (2.94)	73°F (23°C)
55.45 (41.35)	2278	4.11 (15.55)	0.522 (0.318)	13.50 (2.66)	Relative humidity
37.35 (27.85)	2300	3.26 (12.35)	0.616 (0.375)	11.45 (2.26)	43%
18.60 (13.87)	2300	2.44 (9.23)	0.924 (0.562)	7.63 (1.50)	Barometer
0.40 (0.30)	2300	1.84 (6.96)	32.400 (19.708)	0.22 (0.04)	29.14" Hg (98.68 kPa)

Maximum torque - 278 lb.-ft. (376 Nm) at 1602 rpm
 Maximum torque rise - 38.4%
 Torque rise at 1762 rpm - 31%
 Power increase at 1902 rpm - 6.3%

TRACTOR SOUND LEVEL WITH CAB

	Front Wheel Drive Engaged dB(A)	Disengaged dB(A)
At no load in 7th(B3) gear	76.1	76.2
Transport in 16th (D4) gear		76.4
Bystander in 16th (D4) gear		78.9

TIRES AND WEIGHT

Rear tires—No., size, ply & psi (kPa)
Front tires—No., size, ply & psi (kPa)
Height of drawbar
Static weight with operator—Rear
 —Front
 —Total

Tested without ballast
 Two 18.4R30; **, 12 (85)
 Two 12.4R24; ***, 12 (85)
 17.0 in (430 mm)
 5390 lb (2445 kg)
 3410 lb (1547 kg)
 8800 lb (3992 kg)

Location of tests: Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln Nebraska 68583-0832

Dates of tests: September 13 - 21, 2012

Manufacturer: John Deere Commercial Products Inc., 700 Horizon South Parkway, Grovetown Ga. USA, 30813

FUEL, OIL and TIME: Fuel No. 2 Diesel Specific gravity converted to 60°/60°F (15°/15°C) 0.8467 Fuel weight 7.050 lbs/gal (0.845 kg/l) Oil SAE 15W40 API service classification CJ-4 Transmission and hydraulic lubricant John Deere Hy-Gard fluid Front axle lubricant SAE 80W90 API GL-5 Total time engine was operated 10.5 hours

ENGINE: Make John Deere Diesel **Type** four cylinder vertical with turbocharger and air to air intercooler **Serial No.** *PE4045R011515* **Crankshaft** lengthwise **Rated engine speed** 2200 **Bore and stroke** 4.19" x 5.00" (106.5 mm x 127.0 mm) **Compression ratio** 16.8 to 1 **Displacement** 276 cu in (4525 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** two paper elements and aspirator **Oil filter** one full flow cartridge **Oil cooler** engine coolant heat exchanger for crankcase oil, radiator for hydraulic and transmission oil **Fuel filter** one paper element **Fuel cooler** radiator for return fuel **Exhaust** regenerative particulate filter integrated within a vertical muffler **Cooling medium temperature control** one thermostat and variable speed fan

ENGINE OPERATING PARAMETERS: Fuel rate: 37.0 - 40.8 lb/h (16.8 - 18.5 kg/h) **High idle:** 2275 - 2325 rpm **Turbo boost:** nominal 14.5 - 17.4 psi (100 - 120 kPa) as measured 16.1 psi (111 kPa)

CHASSIS: Type front wheel assist **Serial No.** *1LV5100MACJ440187* **Tread width** rear 59.4" (1508 mm) to 71.4" (1813 mm) front 52.8" (1342 mm) to 77.0" (1957 mm) **Wheelbase** 90.6" (2300 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio **Nominal travel speeds mph (km/h)** first 1.19 (1.91) second 1.52 (2.44) third 1.83 (2.95) fourth 2.19 (3.53) fifth 2.86 (4.61) sixth 3.65 (5.88) seventh 4.43 (7.13) eighth 5.29 (8.52) ninth 7.02 (11.29) tenth 8.95 (14.41) eleventh 10.84 (17.44) twelfth 10.85 (17.46) thirteenth 12.97 (20.88) fourteenth 13.84 (22.27) fifteenth 16.77 (26.99) sixteenth 20.05 (32.27) reverse 1.30 (2.10), 1.67 (2.69), 2.02 (3.25), 2.42 (3.89), 3.16 (5.08), 4.03 (6.48), 4.88 (7.85), 5.83 (9.39), 7.73 (12.44), 9.87 (15.88), 11.94 (19.22), 11.96 (19.25), 14.30 (23.01), 15.25 (24.54), 18.49 (29.75), 22.10 (35.56)

HYDRAULIC PERFORMANCE

CATEGORY: II

Quick Attach: None

OECD Static test

Maximum force exerted through whole range: 4858 lbs (21.6 kN) (2 x 56 mm) lift cylinders
6390 lbs (28.4 kN) (2 x 63 mm)

i) Sustained pressure of the open relief valve: 2789 psi (192 bar)
ii) Pump delivery rate at minimum pressure and rated engine speed: 20.8 GPM (78.9 l/min)

iii) Pump delivery rate at maximum hydraulic power: 20.4 GPM (77.0 l/min)
Delivery pressure: 2534 psi (175 bar)
Power: 30.1 HP (30.1 kW)

Clutch wet disc hydraulically actuated by foot pedal **Brakes** wet disc hydraulically actuated by two foot pedals which can be locked together **Steering** hydrostatic **Power take-off** 540 rpm at 2100 engine rpm, Economy PTO 540 rpm at 1645 engine rpm **Unladen tractor mass** 8625 lb (3912 kg)

REPAIRS AND ADJUSTMENTS: No repairs or adjustments.

NOTE 1: The manufacturer declares that the average time between active regenerations is 100 hours, while operated in Auto Filter Cleaning Mode, at rated speed, full load, under steady state conditions.

HITCH DIMENSIONS AS TESTED—NO LOAD


	inch	mm
A	25.2	640
B	12.6	320
C	17.7	449
D	15.0	380
E	14.8	375
F	8.8	223
G	29.3	745
H	0.2	4
I	15.4	390
J	20.5	522
K	17.5	444
L	41.7	1060
M	23.0	585
N	33.1	840
O	9.1	230
P	44.6	1132
Q	36.2	919
R	27.8	705

REMARKS: All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. For the maximum power tests, the fuel temperature at the injection pump inlet was maintained at 139°F (59°C).

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. 2037, February 13, 2013.

Roger M. Hoy
Director

M.R. Riley
P.J. Jasa
J.D. Luck
Board of Tractor Test Engineers

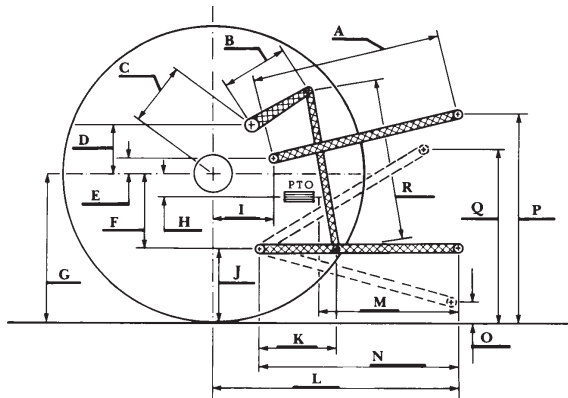

Economy mode
540 PTO rpm @ 1645 engine rpm

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)
85.85 (64.02)	1645	4.71 (17.84)	0.387 (0.236)	18.21 (3.59)
64.60 (48.17)	1650	3.73 (14.13)	0.407 (0.248)	17.30 (3.41)
43.10 (32.14)	1651	2.71 (10.25)	0.443 (0.270)	15.92 (3.14)
21.60 (16.11)	1648	1.83 (6.92)	0.597 (0.363)	11.81 (2.33)
0.40 (0.30)	1653	1.24 (4.68)	21.800 (13.270)	0.32 (0.06)

Normal mode
540 PTO rpm @ 2100 engine rpm

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)
85.85 (64.02)	2098	5.08 (19.22)	0.417 (0.254)	16.91 (3.33)
64.50 (48.10)	2104	4.19 (15.86)	0.458 (0.279)	15.39 (3.03)
42.80 (31.92)	2093	3.19 (12.06)	0.525 (0.320)	13.43 (2.65)
21.40 (15.96)	2091	2.35 (8.89)	0.774 (0.471)	9.11 (1.80)
0.30 (0.22)	2093	1.51 (5.73)	35.583 (21.660)	0.20 (0.04)



JOHN DEERE 5100M DIESEL
Institute of Agriculture and Natural Resources
University of Nebraska–Lincoln