

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F.
Larsen

2016

Test 2145: John Deere 6135E

Nebraska Tractor Test Lab

University of Nebraska-Lincoln, tractortestlab@unl.edu

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Energy Systems Commons](#), [History of Science, Technology, and Medicine Commons](#), [Other Mechanical Engineering Commons](#), [Physical Sciences and Mathematics Commons](#), [Science and Mathematics Education Commons](#), and the [United States History Commons](#)

Nebraska Tractor Test Lab, "Test 2145: John Deere 6135E" (2016). *Nebraska Tractor Tests*. 2571.
<https://digitalcommons.unl.edu/tractormuseumlit/2571>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

NEBRASKA OECD TRACTOR TEST 2145—SUMMARY 1008

JOHN DEERE 6135E DIESEL

24 SPEED

POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Diesel Consumption Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	D.E.F. Consumption Gal/hr (l/h)	Mean Atmospheric Conditions
MAXIMUM POWER AND FUEL CONSUMPTION						
Rated Engine Speed—(PTO speed—1065 rpm)						
114.23 (85.18)	2199	7.25 (27.46)	0.445 (0.271)	15.75 (3.10)	0.12 (0.45)	Fuel used during active exhaust regeneration-0.71 gal (2.69 l) (see note 1, p.2)
Power at 2100 engine rpm						
119.37 (89.01)	2100	7.31 (27.67)	0.429 (0.261)	16.33 (3.22)	0.13 (0.51)	
Standard Power Take-off Speed (1000 rpm)						
119.61 (89.20)	2065	7.26 (27.50)	0.426 (0.259)	16.47 (3.24)	0.13 (0.51)	
Maximum Power (1 hour)						
122.19 (91.12)	1900	7.15 (27.07)	0.410 (0.249)	17.09 (3.37)	0.14 (0.55)	

VARYING POWER AND FUEL CONSUMPTION

114.23 (85.18)	2199	7.25 (27.46)	0.445 (0.271)	15.75 (3.10)	0.12 (0.45)	Air temperature
98.17 (73.20)	2226	6.45 (24.42)	0.461 (0.280)	15.22 (3.00)	0.11 (0.41)	74°F (23°C)
74.24 (55.36)	2245	5.31 (20.10)	0.501 (0.305)	13.99 (2.76)	0.09 (0.34)	Relative humidity
49.96 (37.26)	2266	4.26 (16.11)	0.597 (0.363)	11.74 (2.31)	0.04 (0.17)	18%
25.44 (18.97)	2299	3.18 (12.03)	0.876 (0.533)	8.00 (1.58)	0.01 (0.03)	Barometer
1.08 (0.80)	2301	2.30 (8.71)	14.978 (9.111)	0.47 (0.09)	0.03 (0.13)	28.75" Hg (97.37 kPa)

Maximum torque - 373 lb.-ft. (506 Nm) at 1401 rpm

Maximum torque rise - 36.8%

Torque rise at 1759 engine rpm - 30%

Power increase at 1900 engine rpm - 7.0%

DRAWBAR PERFORMANCE

UNBALLASTED - FRONT DRIVE ENGAGED

FUEL CONSUMPTION CHARACTERISTICS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	D.E.F. Consumption lb/hp.hr (kg/kW.h)	Temp. °F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
Power at Rated Engine Speed—8th (B1H) Gear										
102.75 (76.62)	9100 (40.48)	4.24 (6.82)	2200	6.3	0.496 (0.302)	14.13 (2.78)	0.009 (0.005)	187 (86)	56 (13)	28.35 (96.00)
75% of Pull at Rated Engine Speed—8th (B1H) Gear										
80.46 (60.00)	6831 (30.39)	4.42 (7.11)	2233	3.7	0.514 (0.313)	13.64 (2.69)	0.007 (0.004)	186 (85)	56 (13)	28.37 (96.07)
50% of Pull at Rated Engine Speed—8th (B1H) Gear										
55.01 (41.02)	4560 (20.28)	4.53 (7.28)	2256	2.3	0.603 (0.367)	11.62 (2.29)	0.007 (0.005)	185 (85)	56 (13)	28.36 (96.04)
75% of Pull at Reduced Engine Speed—11th (B2H) Gear										
80.34 (59.91)	6851 (30.47)	4.40 (7.08)	1481	3.8	0.421 (0.256)	16.64 (3.28)	0.018 (0.011)	185 (85)	56 (13)	28.37 (96.07)
50% of Pull at Reduced Engine Speed—11th (B2H) Gear										
54.93 (40.96)	4531 (20.15)	4.55 (7.32)	1510	2.4	0.448 (0.273)	15.64 (3.08)	0.019 (0.012)	183 (84)	56 (14)	28.38 (96.11)

Location of tests: Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln, Nebraska 68583-0832

Dates of tests: March 29 to April 12, 2016

Manufacturer: Industrious John Deere, Boulevard Valdez Sanchez # 470, Saltillo, Coahuila CP25005 Mexico

CONSUMABLE Fluids, OIL and TIME: Fuel No. 2 Diesel **Specific gravity converted to 60°/60°F (15°/15°C)** 0.8417 **Fuel weight** 7.008 lbs/gal (0.840 kg/l) **Diesel Exhaust Fluid (DEF)** 32% aqueous urea solution **DEF weight** 9.071 lbs/gal (1.087 kg/l) **Oil SAE 15W-40 API service classification** CJ-4 **Transmission and hydraulic lubricant** John Deere Hy-Gard fluid **Front axle lubricant** John Deere Hy-Gard fluid **Total time engine was operated:** 22.5 hours

ENGINE: Make John Deere **Diesel Type** Four cylinder vertical with turbocharger, air to air intercooler and D.E.F. (diesel exhaust fluid) exhaust treatment **Serial No.** *PE4045 U022958* **Crankshaft** lengthwise **Rated engine speed** 2200 **Bore and stroke** 4.19 x 5.00" (106.5 mm x 127.0 mm) **Compression ratio** 16.8 to 1 **Displacement** 276 cu in (4525 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** two paper elements and aspirator **Oil filter** one full flow cartridge **Oil cooler** engine coolant heat exchanger for crankcase oil, radiator for hydraulic and transmission oil **Fuel filter** two paper elements **Fuel cooler** radiator for pump return fuel **Exhaust** DOC (diesel oxidation catalyst), SCR (selective catalyst reduction) and regenerative DPF (diesel particulate filter) integrated within a vertical muffler **Cooling medium temperature control** two thermostats and variable speed fan

ENGINE OPERATING PARAMETERS: Fuel rate: 48.3 - 52.2 lb/h (21.9 - 23.7 kg/h) **High idle:** 2280 - 2320 rpm **Turbo boost:** nominal 19.6 - 22.5 psi (135 - 155 kPa) as measured 20.8 psi (143 kPa)

CHASSIS: Type front wheel assist **Serial No.** *1P06135EEF0001028* **Tread width** rear 59.5" (1512 mm) to 79.2" (2012 mm) front 60.1" (1527 mm) to 80.3" (2039 mm) **Wheelbase** 96.5" (2450 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio with partial (2) range operator controlled powershift **Nominal travel speeds mph (km/h)** first 1.58 (2.54) second 1.87 (3.01) third 2.37 (3.81) fourth 2.80 (4.51) fifth 3.22 (5.18) sixth 3.80 (6.12) seventh 3.82 (6.14) eighth 4.51 (7.26) ninth 5.70 (9.18) tenth 6.49 (10.44) eleventh 6.76 (10.88) twelfth 7.69 (12.37) thirteenth 7.77 (12.50) fourteenth 9.20 (14.81) fifteenth 9.73 (15.66) sixteenth 10.15 (16.34) seventeenth 11.53 (18.56) eighteenth 12.03 (19.36) nineteenth 13.24 (21.31) twentieth 15.23 (24.51)

DRAWBAR PERFORMANCE
UNBALLASTED - FRONT DRIVE ENGAGED
MAXIMUM POWER IN SELECTED GEARS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Consumption Hp.hr/gal (kW.h/l)	D.E.F Consumption lb/hp.hr (kg/kW.h)	Temp. °F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
6th (B1L) Gear										
91.84 (68.48)	10485 (46.64)	3.29 (5.29)	2203	13.9	0.552 (0.335)	12.71 (2.50)	0.010 (0.006)	186 (85)	56 (13)	29.04 (98.34)
7th (A3H) Gear										
94.34 (70.35)	10332 (45.96)	3.43 (5.51)	2206	10.6	0.528 (0.321)	13.27 (2.61)	0.010 (0.006)	186 (85)	58 (14)	29.02 (98.27)
8th (B1H) Gear										
102.75 (76.62)	9100 (40.48)	4.24 (6.82)	2200	6.3	0.496 (0.302)	14.13 (2.78)	0.009 (0.005)	187 (86)	56 (13)	28.35 (96.00)
9th (B2L) Gear										
102.98 (76.79)	7021 (31.23)	5.50 (8.85)	2200	3.8	0.493 (0.300)	14.21 (2.80)	0.010 (0.006)	185 (85)	54 (12)	28.36 (96.04)
10th (C1L) Gear										
103.09 (76.87)	6144 (27.33)	6.29 (10.12)	2200	3.3	0.493 (0.300)	14.21 (2.80)	0.010 (0.006)	185 (85)	56 (13)	28.37 (96.07)
11th (B2H) Gear										
104.47 (77.90)	5958 (26.50)	6.58 (10.59)	2200	2.9	0.485 (0.295)	14.44 (2.84)	0.009 (0.006)	185 (85)	52 (11)	28.34 (95.97)
12th (C1H) Gear										
103.68 (77.31)	5183 (23.06)	7.50 (12.07)	2200	2.6	0.490 (0.298)	14.29 (2.82)	0.010 (0.006)	185 (85)	56 (13)	28.36 (96.04)
13th (B3L) Gear										
100.87 (75.22)	4980 (22.15)	7.60 (12.22)	2200	2.4	0.505 (0.307)	13.87 (2.73)	0.010 (0.006)	187 (86)	49 (9)	28.36 (96.04)
14th (B3H) Gear										
100.71 (75.10)	4179 (18.59)	9.04 (14.54)	2200	2.0	0.503 (0.306)	13.93 (2.74)	0.010 (0.006)	186 (85)	50 (10)	28.33 (95.94)

UNBALLASTED - FRONT DRIVE ENGAGED-1900 ENGINE RPM

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Consumption Hp.hr/gal (kW.h/l)	D.E.F Consumption lb/hp.hr (kg/kW.h)	Temp. °F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
6th (B1L) Gear										
92.73 (69.15)	10479 (46.61)	3.32 (5.34)	2203	13.0	0.547 (0.333)	12.82 (2.52)	0.010 (0.006)	188 (86)	56 (13)	29.02 (98.27)
7th (A3H) Gear										
94.57 (70.52)	10344 (46.01)	3.43 (5.52)	2205	10.5	0.529 (0.322)	13.25 (2.61)	0.010 (0.006)	186 (85)	57 (14)	29.01 (98.24)
8th (B1H) Gear										
104.62 (78.01)	9553 (42.49)	4.11 (6.61)	2150	6.8	0.493 (0.300)	14.23 (2.80)	0.010 (0.006)	186 (86)	56 (14)	29.04 (98.34)
9th (B2L) Gear										
107.96 (80.51)	8701 (38.70)	4.65 (7.48)	1900	5.8	0.465 (0.283)	15.06 (2.97)	0.010 (0.006)	186 (86)	55 (13)	28.36 (96.04)
10th (C1L) Gear										
109.45 (81.61)	7652 (34.04)	5.37 (8.63)	1900	4.4	0.462 (0.281)	15.17 (2.99)	0.010 (0.006)	187 (86)	56 (14)	28.37 (96.07)
11th (B2H) Gear										
110.23 (82.19)	7362 (32.75)	5.62 (9.04)	1900	4.1	0.455 (0.277)	15.42 (3.04)	0.010 (0.006)	188 (86)	54 (12)	28.34 (95.97)
12th (C1H) Gear										
109.81 (81.89)	6405 (28.49)	6.43 (10.35)	1900	3.3	0.459 (0.279)	15.27 (3.01)	0.011 (0.007)	188 (87)	56 (14)	28.36 (96.04)
13th (B3L) Gear										
109.53 (81.67)	6313 (28.08)	6.51 (10.48)	1900	3.2	0.456 (0.277)	15.37 (3.03)	0.011 (0.007)	187 (86)	52 (11)	28.34 (95.97)
14th (B3H) Gear										
109.50 (81.65)	5292 (23.54)	7.76 (12.49)	1900	2.6	0.458 (0.279)	15.29 (3.01)	0.010 (0.006)	187 (86)	50 (10)	28.33 (95.94)
15th (C2L) Gear										
108.13 (80.63)	4938 (21.96)	8.21 (13.21)	1900	2.4	0.464 (0.282)	15.09 (2.97)	0.011 (0.007)	192 (89)	56 (13)	28.34 (95.97)

twenty-first 15.70 (25.26) twenty-second 18.05 (29.05) twenty-third 20.73 (33.36) twenty-fourth 24.57 (39.54) reverse 1.70 (2.74), 2.56 (4.12), 3.48 (5.60), 4.11 (6.62), 6.17 (9.93), 7.02 (11.29), 8.39 (13.51), 10.52 (16.93), 10.98 (17.67) 14.32 (23.04), 16.47 (26.50), 22.41 (36.07) **Clutch** wet multiple disc hydraulically actuated by foot pedal **Brakes** wet multiple disc mechanically operated by two foot pedals that can be locked together **Steering** hydrostatic **Power take-off** 540 rpm at 2085 engine rpm or 1000 rpm at 2066 engine rpm **Unladen tractor mass** 10690 lb (4849 kg)

REPAIRS AND ADJUSTMENTS: No repairs or adjustments.

NOTE 1. The manufacturer declares that the average time between active regenerations is 50 hours.

REMARKS: All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. The performance figures on this summary were taken from a test conducted under the OECD Code 2 test procedure.

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. **2145**, Nebraska Summary 1008, May 17, 2016.

Roger M. Hoy
Director

M.F. Kocher
S.K. Pitla
P.J. Jasa
Board of Tractor Test Engineers

DRAWBAR PERFORMANCE **UNBALLASTED - FRONT DRIVE DISENGAGED** **FUEL CONSUMTION CHARACTERISTICS**

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	D.E.F Consumption lb/hp.hr (kg/kW.h)	Temp.°F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
Power at Rated Engine Speed—9th (B2L) Gear										
100.29 (74.78)	7083 (31.51)	5.31 (8.55)	2200	7.0	0.506 (0.308)	13.84 (2.73)	0.010 (0.006)	186 (86)	55 (13)	28.38 (96.11)
75% of Pull at Rated Engine Speed—9th (B2L) Gear										
79.18 (59.04)	5354 (23.82)	5.55 (8.92)	2233	4.1	0.525 (0.319)	13.36 (2.63)	0.010 (0.006)	185 (85)	58 (15)	29.00 (98.21)
50% of Pull at Rated Engine Speed—9th (B2L) Gear										
54.12 (40.36)	3568 (15.87)	5.69 (9.16)	2256	2.6	0.615 (0.374)	11.40 (2.25)	0.010 (0.006)	185 (85)	59 (15)	29.00 (98.21)
75% of Pull at Reduced Engine Speed—13th (B3L) Gear										
78.47 (58.51)	5350 (23.80)	5.50 (8.85)	1627	4.0	0.438 (0.266)	16.01 (3.15)	0.017 (0.010)	185 (85)	61 (16)	28.99 (98.17)
50% of Pull at Reduced Engine Speed—13th (B3L) Gear										
54.15 (40.38)	3580 (15.92)	5.67 (9.12)	1653	2.5	0.484 (0.294)	14.49 (2.85)	0.016 (0.009)	182 (83)	60 (16)	29.00 (98.21)

MAXIMUM POWER IN SELECTED GEARS

8th (B1H) Gear										
85.10 (63.46)	8018 (35.67)	3.98 (6.41)	2220	12.4	0.552 (0.336)	12.70 (2.50)	0.010 (0.006)	185 (85)	55 (13)	29.02 (98.27)
9th (B2L) Gear										
100.29 (74.78)	7083 (31.51)	5.31 (8.55)	2200	7.0	0.506 (0.308)	13.84 (2.73)	0.010 (0.006)	186 (86)	55 (13)	28.38 (96.11)
10th (C1L) Gear										
101.63 (75.78)	6189 (27.53)	6.16 (9.91)	2200	5.2	0.502 (0.305)	13.97 (2.75)	0.010 (0.006)	186 (86)	57 (14)	28.37 (96.07)
11th (B2H) Gear										
102.89 (76.73)	5986 (26.63)	6.45 (10.37)	2201	4.8	0.492 (0.299)	14.25 (2.81)	0.009 (0.006)	185 (85)	52 (11)	28.35 (96.00)
12th (C1H) Gear										
102.35 (76.32)	5195 (23.11)	7.39 (11.89)	2200	4.0	0.496 (0.302)	14.12 (2.78)	0.010 (0.006)	186 (86)	57 (14)	28.34 (95.97)
13th (B3L) Gear										
101.42 (75.63)	5081 (22.60)	7.49 (12.05)	2200	3.7	0.501 (0.305)	13.98 (2.75)	0.010 (0.006)	185 (85)	51 (11)	28.35 (96.00)
14th (B3H) Gear										
100.05 (74.61)	4197 (18.67)	8.94 (14.39)	2200	3.0	0.508 (0.309)	13.79 (2.72)	0.010 (0.006)	186 (85)	51 (11)	28.35 (96.00)

TRACTOR SOUND LEVEL WITH CAB	Front Wheel Drive	
	Engaged dB(A)	Disengaged dB(A)
At no load in 8th (B1H) gear	77.2	77.0
Transport speed - no load - 24th (D3H) gear		80.0
Bystander in 24th (D3H) gear		81.7

TIRES AND WEIGHT

Rear Tires - No., size, ply & psi(kPa)
Front Tires - No., size, ply & psi(kPa)
Height of Drawbar
Static Weight with operator - Rear
- Front
- Total

Tested Without Ballast


Two 460/85R38;**,12(85)
Two 380/85R24;**,12(85)
18.0 in (455 mm)
6740 lb (3057 kg)
4125 lb (1871 kg)
10865 lb (4928 kg)

HYDRAULIC PERFORMANCE

CATEGORY: II

Quick Attach: No

Maximum force exerted through whole range:	<u>Lift cylinders</u>
	5722 lbs (25.5 kN) 2 x 70 mm 7304 lbs (32.5 kN) 2 x 80 mm
i) Maximum observed pressure:	2858 psi (197 bar) <u>three outlet sets combined</u>
ii) Pump delivery rate at minimum pressure and rated engine speed:	21.1 GPM (79.9 l/min)
iii) Pump delivery rate at maximum hydraulic power:	20.2 GPM (76.4 l/min)
Delivery pressure:	2228 psi (154 bar)
Power:	26.2 HP (19.6 kW) <u>single outlet set</u>
ii) Pump delivery rate at minimum pressure and rated engine speed:	21.0 GPM (79.6 l/min)
iii) Pump delivery rate at maximum hydraulic power:	20.3 GPM (76.8 l/min)
Delivery pressure:	2229 psi (154 bar)
Power:	26.4 HP (19.7 kW)

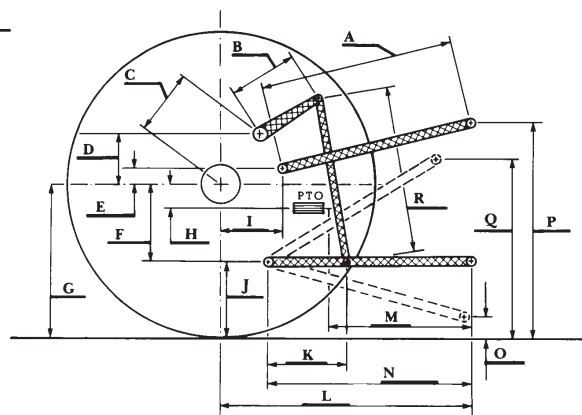

HITCH DIMENSIONS AS TESTED—NO LOAD

	inch	mm
A	24.8	630
B	13.6	345
C	18.7	474
D	14.3	364
E	9.3	236
F	10.8	275
G	32.3	820
H	1.9	48
I	20.9	532
J	21.5	545
K	17.5	444
L	46.7	1187
M	24.9	632
N	33.1	840
O	9.0	230
P	45.5	1155
Q	38.0	965
R	30.5	775



JOHN DEERE 6135E DIESEL

Institute of Agriculture and Natural Resources
University of Nebraska–Lincoln