

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

---

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F.  
Larsen

---

2016

## Test 2157A: New Holland TS6.120

Nebraska Tractor Test Laboratory

University of Nebraska-Lincoln, tractortestlab@unl.edu

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Energy Systems Commons](#), [History of Science, Technology, and Medicine Commons](#), [Other Mechanical Engineering Commons](#), [Physical Sciences and Mathematics Commons](#), [Science and Mathematics Education Commons](#), and the [United States History Commons](#)

---

Laboratory, Nebraska Tractor Test, "Test 2157A: New Holland TS6.120" (2016). *Nebraska Tractor Tests*. 2606.

<https://digitalcommons.unl.edu/tractormuseumlit/2606>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

# NEBRASKA OECD TRACTOR TEST 2157A—SUMMARY 1038A

## NEW HOLLAND TS6.120 DIESEL

### 16 SPEED

Chassis serial numbers NT00001M and higher

#### POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Diesel Consumption		D.E.F. Consumption		Mean Atmospheric Conditions
		Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.l/l)	Gal/hr (l/h)	

#### MAXIMUM POWER AND FUEL CONSUMPTION

Rated Engine Speed—(PTO speed—628 rpm)						
102.55 (76.47)	2201	6.40 (24.23)	0.438 (0.266)	16.02 (3.16)	0.40 (1.52)	
Standard Power Take-off Speed (540 rpm)						
104.24 (77.74)	1890	5.94 (22.48)	0.399 (0.243)	17.56 (3.46)	0.38 (1.42)	
Power at 1850 engine rpm (1 hour)						
104.18 (77.68)	1851	5.86 (22.19)	0.394 (0.240)	17.77 (3.50)	0.39 (1.46)	

#### VARYING POWER AND FUEL CONSUMPTION

102.55 (76.47)	2201	6.40 (24.23)	0.438 (0.266)	16.02 (3.16)	0.40 (1.52)	Air temperature
88.78 (66.20)	2238	5.94 (22.47)	0.469 (0.285)	14.96 (2.95)	0.35 (1.33)	82°F (28°C)
67.59 (50.40)	2268	4.86 (18.40)	0.504 (0.307)	13.91 (2.74)	0.27 (1.01)	Relative humidity
45.61 (34.01)	2298	3.93 (14.86)	0.603 (0.367)	11.62 (2.29)	0.19 (0.71)	71%
23.09 (17.22)	2324	3.19 (12.06)	0.968 (0.589)	7.24 (1.43)	0.13 (0.50)	Barometer
0.91 (0.68)	2348	2.27 (8.59)	17.557 (10.680)	0.40 (0.08)	0.07 (0.28)	28.66" Hg (97.06 kPa)

Maximum torque - 366 lb.-ft. (496 Nm) at 1249 rpm

Maximum torque rise - 49.5%

Torque rise at 1760 engine rpm - 27%

Power increase at 1851 engine rpm - 1.6%

#### DRAWBAR PERFORMANCE UNBALLASTED - FRONT DRIVE ENGAGED FUEL CONSUMPTION CHARACTERISTICS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	D.E.F. Consumption lb/hp.hr (kg/kW.h)	Temp. °F(°C) cool- ing med bulb	Air dry bulb	Barom. inch Hg (kPa)	
Power at Rated Engine Speed—8th (L4R) Gear										
87.99 (65.61)	6814 (30.31)	4.84 (7.79)	2200	7.7	0.510 (0.310)	13.75 (2.71)	0.042 (0.026)	183 (84)	72 (22)	28.72 (97.26)
75% of Pull at Rated Engine Speed—8th (L4R) Gear										
69.29 (51.67)	5097 (22.67)	5.10 (8.21)	2249	5.0	0.550 (0.335)	12.75 (2.51)	0.045 (0.028)	183 (84)	81 (27)	28.68 (97.12)
50% of Pull at Rated Engine Speed—8th (L4R) Gear										
48.03 (35.82)	3406 (15.15)	5.29 (8.51)	2283	2.9	0.643 (0.391)	10.89 (2.15)	0.052 (0.032)	183 (84)	82 (28)	28.68 (97.12)
75% of Pull at Reduced Engine Speed—10th (H1R) Gear										
69.62 (51.91)	5132 (22.83)	5.09 (8.19)	1766	5.1	0.457 (0.278)	15.34 (3.02)	0.042 (0.025)	182 (83)	83 (28)	28.65 (97.02)
50% of Pull at Reduced Engine Speed—10th (H1R) Gear										
48.19 (35.94)	3413 (15.18)	5.30 (8.52)	1798	2.9	0.512 (0.311)	13.70 (2.70)	0.043 (0.026)	181 (83)	82 (28)	28.67 (97.09)

**Location of tests:** Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln Nebraska 68583-0832

**Dates of tests:** September 7 - 9, 2016

**Manufacturer:** CNH De Mexico, Queretaro Mexico

**CONSUMABLE Fluids, OIL and TIME: Fuel** No. 2 Diesel **Specific gravity converted to 60°/60°F (15°/15°C)** 0.8418 **Fuel weight** 7.009 lbs/gal (0.840 kg/l) **Diesel Exhaust Fluid (DEF)** 32% aqueous urea solution **DEF weight** 9.071 lbs/gal (1.087 kg/l) **Oil SAE 10W30 API service classification** CJ-4 **Transmission, hydraulic and front axle lubricant** New Holland Ambra Multi G134 fluid **Total time engine was operated** 16.0 hours

**ENGINE: Make** F.P.T NEF **Diesel Type** Four cylinder vertical with turbocharger, air to air intercooler and D.E.F. (diesel exhaust fluid) exhaust treatment. **Serial No.** 001387400 **Crankshaft** lengthwise **Rated engine speed** 2200 **Bore and stroke** 4.094" x 5.197" (104.0 mm x 132.0 mm) **Compression ratio** 17.0 to 1 **Displacement** 274 cu in (4485 ml) **Starting system** 12 volt **Lubrication pressure** **Air cleaner** two paper elements **Oil filter** one full flow cartridge **Oil cooler** engine coolant heat exchanger for crankcase oil, radiator for hydraulic and transmission oil **Fuel filter** one paper element **Exhaust DOC** (diesel oxidation catalyst) and SCR (selective catalyst reduction) integrated within a vertical muffler **Cooling medium temperature control** one thermostat

**ENGINE OPERATING PARAMETERS: Fuel rate:** 41.6 - 45.2 lb/h (18.9 - 20.5 kg/h) **High idle:** 2325 - 2375 rpm **Turbo boost:** nominal 16.7- 18.9 psi (115 - 130 kPa) as measured 17.9 psi (123 kPa)

**CHASSIS: Type** front wheel assist **Serial No.** CT00675M **Tread width** rear 64.0" (1625 mm) to 78.0" (1981 mm) front 60.8" (1544 mm) to 88.1" (2240 mm) **Wheelbase** 99.3" (2521 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio with partial (2) range operator controlled powershift **Nominal travel speeds mph (km/h)** first 1.45 (2.33) second 1.77 (2.85) third 2.22 (3.58) fourth 2.73 (4.39) fifth 3.02 (4.86) sixth 3.70 (5.96) seventh 4.19 (6.75) eighth 5.15 (8.28) ninth 5.33 (8.58) tenth 6.54 (10.52) eleventh 8.21 (13.22) twelfth 10.01 (16.20) thirteenth 11.15 (17.94) fourteenth 13.66 (21.99) fifteenth 15.49 (24.92) sixteenth 18.98 (30.54) reverse 1.83 (2.95), 2.82 (4.54), 3.83 (6.16), 5.32 (8.56), 6.76 (10.88), 10.41 (16.75), 14.13 (22.74), 19.62 (31.58) **Clutch** single dry disc operated by foot pedal **Brakes** single wet disc operated by two foot pedals which can be locked together **Steering** hydrostatic **Power take-off** 540 rpm at 1890 engine rpm or 1000 rpm at 2049 engine rpm **Unladen tractor mass** 10505 lb (4765 kg)

**DRAWBAR PERFORMANCE**  
**UNBALLASTED - FRONT DRIVE ENGAGED**  
**MAXIMUM POWER IN SELECTED GEARS**

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	D.E.F Consumption lb/hp.hr (kg/kW.h)	Temp. °F(°C) cool- ing med	Air dry bulb	inch Hg (kPa)
6th (L3R) Gear										
76.27 (56.87)	8821 (39.24)	3.25 (5.22)	2219	15.0	0.568 (0.346)	12.33 (2.43)	0.045 (0.027)	183 (84)	76 (24)	28.72 (97.26)
7th (L4T) Gear										
83.49 (62.25)	8301 (36.92)	3.77 (6.07)	2200	12.0	0.537 (0.327)	13.04 (2.57)	0.045 (0.027)	184 (84)	72 (22)	28.72 (97.26)
8th (L4R) Gear										
87.99 (65.61)	6814 (30.31)	4.84 (7.79)	2200	7.7	0.510 (0.310)	13.75 (2.71)	0.042 (0.026)	183 (84)	72 (22)	28.72 (97.26)
9th (H1T) Gear										
87.45 (65.21)	6481 (28.83)	5.06 (8.14)	2200	7.1	0.514 (0.313)	13.64 (2.69)	0.041 (0.025)	183 (84)	72 (22)	28.71 (97.22)
10th(H1R) Gear										
90.03 (67.14)	5335 (23.73)	6.33 (10.19)	2200	5.3	0.499 (0.304)	14.04 (2.77)	0.042 (0.026)	183 (84)	72 (22)	28.71 (97.22)
11th (H2T) Gear										
89.22 (66.53)	4151 (18.46)	8.06 (12.97)	2200	3.8	0.500 (0.304)	14.00 (2.76)	0.046 (0.028)	185 (85)	77 (25)	28.71 (97.22)

**UNBALLASTED - FRONT DRIVE ENGAGED-1850 ENGINE RPM**

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	D.E.F Consumption lb/hp.hr (kg/kW.h)	Temp. °F(°C) cool- ing med	Air dry bulb	inch Hg (kPa)
6th (L3R) Gear										
76.34 (56.92)	8815 (39.21)	3.25 (5.23)	2219	14.9	0.566 (0.344)	12.38 (2.44)	0.045 (0.027)	183 (84)	76 (24)	28.73 (97.29)
7th (L4T) Gear										
83.41 (62.20)	8542 (37.99)	3.67 (5.90)	2164	13.1	0.536 (0.326)	13.07 (2.58)	0.044 (0.027)	185 (85)	72 (22)	28.71 (97.22)
8th (L4R) Gear										
88.41 (65.93)	7477 (33.26)	4.43 (7.13)	2050	9.3	0.491 (0.298)	14.29 (2.81)	0.042 (0.025)	183 (84)	73 (23)	28.72 (97.26)
9th (H1T) Gear										
87.78 (65.46)	7299 (32.47)	4.51 (7.26)	2000	8.8	0.491 (0.298)	14.29 (2.81)	0.041 (0.025)	183 (84)	72 (22)	28.71 (97.22)
10th(H1R) Gear										
91.52 (68.24)	6392 (28.43)	5.37 (8.64)	1900	6.9	0.458 (0.278)	15.31 (3.02)	0.038 (0.023)	183 (84)	71 (22)	28.71 (97.22)
11th (H2T) Gear										
91.10 (67.93)	5107 (22.71)	6.69 (10.77)	1850	5.2	0.452 (0.275)	15.49 (3.05)	0.041 (0.025)	184 (84)	76 (25)	28.70 (97.19)
12th (H2R) Gear										
92.21 (68.76)	4161 (18.51)	8.31 (13.37)	1850	3.8	0.445 (0.271)	15.75 (3.10)	0.042 (0.025)	183 (84)	78 (26)	28.70 (97.19)

TRACTOR SOUND LEVEL WITH CAB	Front Wheel Drive	
	Engaged dB(A)	Disengaged dB(A)
At no load in 8th (4LR) gear	79.8	79.9
Bystander in 16th (4HR) gear		86.2

**TIRES AND WEIGHT**

**Rear Tires** - No., size, ply & psi(kPa)  
**Front Tires** - No., size, ply & psi(kPa)  
**Height of Drawbar**  
**Static Weight with operator** - Rear  
- Front  
- Total

**Tested Without Ballast**

Two 18.4-38;8;16(110)  
Two 14.9-28;6;16(110)  
23.5 in (595 mm)  
6260 lb (2839 kg)  
4420 lb (2005 kg)  
10680 lb (4844 kg)

**REPAIRS AND ADJUSTMENTS:** No repairs or adjustments.

**NOTE 1:** The performance results on this report were obtained from tests carried out on the Case IH Farmall 120A Diesel.

**NOTE 2:** The performance figures on this report apply to New Holland TS6.120 tractors with chassis serial numbers NT00001M and higher.

**REMARKS:** All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. This tractor did not meet the manufacturer's implement flow claims of 13 GPM (49 l/min) nor 22 GPM (83 l/min) with dual pump system. The manufacturer's 3 point lift claims of 3735 lb (1693 kg), 5499 lbs (2499 kg) (with 1 external lift cylinder) and 7326 lb (3323 kg) (with 2 external lift cylinders) were not met when tested by OECD Code 2 standards. The performance figures on this summary were taken from a test conducted under the OECD Code 2 test procedure.

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. **2157A**, Nebraska Summary 1038A, March 3, 2017.

Roger M. Hoy  
Director

M.F. Kocher  
P.J. Jasa  
J.D. Luck  
Board of Tractor Test Engineers

The 3 point lift performance figures listed below are from tests conducted on the New Holland TS6030 Diesel

### HYDRAULIC PERFORMANCE

CATEGORY: II

Quick Attach: None


OECD Static test

Maximum force exerted through whole range:

3096 lbs (13.77 kN)  
 4608 lbs (20.50 kN)(1 external lift cylinder)  
 6174 lbs (27.46 kN)(2 external lift cylinders)

Single pump system Two pump system  
two outlet sets combined

i) Sustained pressure of the open relief valve:	2620 psi (181 bar)	2474 psi (171 bar)
ii) Pump delivery rate at minimum pressure and rated engine speed:	12.4 GPM (47.1 l/min)	18.7 GPM (70.8 l/min)
iii) Pump delivery rate at maximum hydraulic power:	10.2 GPM (38.6 l/min)	16.2 GPM (61.3 l/min)
Delivery pressure:	2268 psi (156 bar)	2073 psi (143 bar)
Power:	13.5 HP (10.1 kW)	19.6 HP (14.6 kW)
<u>single outlet set</u>		
i) Sustained pressure of the open relief valve:	2646 psi (182 bar)	2472 psi (170 bar)
ii) Pump delivery rate at minimum pressure and rated engine speed:	12.3 GPM (46.7 l/min)	18.3 GPM (69.1 l/min)
iii) Pump delivery rate at maximum hydraulic power:	10.0 GPM (37.9 l/min)	16.4 GPM (62.1 l/min)
Delivery pressure:	2223 psi (153 bar)	1943 psi (134 bar)
Power:	13.0 HP (9.7 kW)	18.6 HP (13.9 kW)

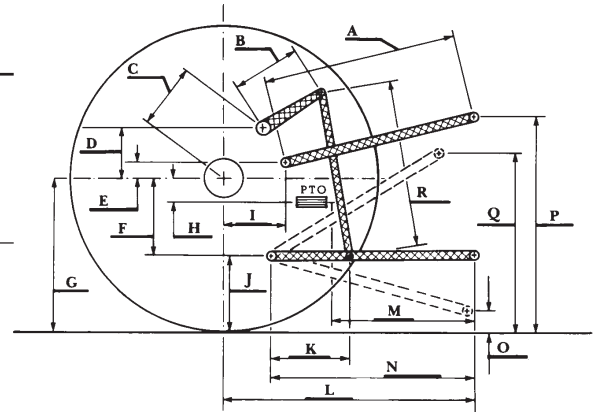

### HITCH DIMENSIONS AS TESTED—NO LOAD

	SAE Test		OECD Test	
	inch	mm	inch	mm
A	27.7	705	28.5	724
B	9.8	250	9.8	250
C	14.1	357	14.1	357
D	13.5	342	13.5	342
E	8.1	205	8.1	205
F	9.0	229	9.0	229
G	30.3	770	30.3	770
H	0.4	10	0.4	10
I	12.7	323	12.7	323
J	21.3	541	21.3	541
K	18.1	460	18.1	460
L	40.8	1037	40.8	1037
M	22.9	581	22.9	581
N	36.6	930	36.6	930
O	8.0	203	8.0	203
P	40.3	1024	45.3	1151
Q	34.0	864	34.0	864
R	32.5	826	32.5	826

### THREE POINT HITCH PERFORMANCE(SAE Static test)

Observed maximum pressure psi. (bar)	2480 (171)
Location:	lift cylinder
Hydraulic oil temperature: °F (°C)	145 (63)
Location:	pump inlet
Category:	II
Quick attach:	none

System pressure 2210 psi (152 Bar)

Hitch point distance to ground level in. (mm)	8.0 (203)	15.0 (381)	22.0 (559)	29.0 (737)	36.0 (914)
Lift force on frame lb	4374	4244	4127	4257	3735
" " " " " " (kN)	(19.5)	(18.9)	(18.4)	(18.9)	(16.6)

#### One external lift cylinder

System pressure 2210 psi (152 Bar)

Hitch point distance to ground level in. (mm)	8.0 (203)	15.0 (381)	22.0 (559)	29.0 (737)	36.0 (914)
Lift force on frame lb	6764	6444	6174	6300	5499
" " " " " " (kN)	(30.1)	(28.7)	(27.5)	(28.0)	(24.5)

#### Two external lift cylinders

System pressure 2210 psi (152 Bar)

Hitch point distance to ground level in. (mm)	8.0 (203)	15.0 (381)	22.0 (559)	29.0 (737)	36.0 (914)
Lift force on frame lb	9270	8622	8199	8361	7326
" " " " " " (kN)	(41.2)	(38.4)	(36.5)	(37.2)	(32.6)



NEW HOLLAND TS6.120 DIESEL

Institute of Agriculture and Natural Resources  
 University of Nebraska-Lincoln