

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F.
Larsen

2021

Test 2230: John Deere 8R 230

Nebraska Tractor Test Lab

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Energy Systems Commons](#), [History of Science, Technology, and Medicine Commons](#), [Other Mechanical Engineering Commons](#), [Physical Sciences and Mathematics Commons](#), [Science and Mathematics Education Commons](#), and the [United States History Commons](#)

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

NEBRASKA OECD TRACTOR TEST 2230–SUMMARY 1182

JOHN DEERE 8R 230 DIESEL

e23 TRANSMISSION

POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Diesel Consumption		D.E.F. Consumption		Mean Atmospheric Conditions
		Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Gal/hr (l/h)	
MAXIMUM POWER AND FUEL CONSUMPTION						
Rated Engine Speed—(PTO speed—1052 rpm)						
203.97 (152.10)	2101	11.24 (42.53)	0.385 (0.234)	18.15 (3.58)	0.49 (1.85)	Fuel used during active exhaust regeneration-1.10 gal(4.18 l) (see note 1, p.2)
Standard Power Take-off Speed(1000 rpm)						
221.07 (164.85)	1995	11.78 (44.58)	0.373 (0.227)	18.77 (3.70)	0.52 (1.97)	
Maximum Power (1 hour)						
232.05 (173.04)	1700	11.59 (43.88)	0.350 (0.213)	20.02 (3.94)	0.45 (1.71)	

VARYING POWER AND FUEL CONSUMPTION

203.97 (152.10)	2101	11.24 (42.53)	0.385 (0.234)	18.15 (3.58)	0.49 (1.85)	Air temperature
177.87 (132.63)	2154	10.39 (39.32)	0.409 (0.249)	17.12 (3.37)	0.47 (1.76)	72°F(22°C)
134.03 (99.95)	2164	8.58 (32.48)	0.448 (0.272)	15.62 (3.08)	0.29 (1.11)	Relative humidity
90.42 (67.43)	2176	6.99 (26.47)	0.541 (0.329)	12.93 (2.55)	0.20 (0.77)	10%
45.53 (33.95)	2187	5.46 (20.66)	0.839 (0.510)	8.34 (1.64)	0.12 (0.46)	Barometer
1.70 (1.27)	2195	4.43 (16.77)	18.223 (11.085)	0.38 (0.08)	0.17 (0.66)	28.76" Hg(97.38 kPa)

Maximum Torque - 766 lb.-ft. (1039 Nm) at 1550 rpm

Maximum Torque Rise - 50.2%

Torque rise at 1680 engine rpm - 41%

Power increase at 1700 engine rpm - 13.8%

DRAWBAR PERFORMANCE

UNBALLASTED - FRONT DRIVE ENGAGED FUEL CONSUMPTION CHARACTERISTICS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	D.E.F. Consumption Hp.hr/gal (kW.h/l)	Temp. °F(°C) cool- ing dry med Air bulb	Barom. inch Hg (kPa)
Power at Rated Engine Speed—9th Gear-Manual mode								
182.39 (136.00)	14701 (65.39)	4.65 (7.48)	2100	3.1	0.428 (0.260)	16.36 (3.22)	0.027 (0.016)	205 (96)
75% of Pull at Rated Engine Speed—9th Gear-Manual mode								
141.59 (105.58)	11031 (49.07)	4.81 (7.74)	2159	2.3	0.469 (0.285)	14.93 (2.94)	0.024 (0.014)	205 (96)
50% of Pull at Rated Engine Speed—9th Gear-Manual mode								
95.55 (71.25)	7345 (32.67)	4.88 (7.85)	2172	1.6	0.557 (0.339)	12.56 (2.47)	0.021 (0.013)	204 (96)
75% of Pull at Reduced Engine Speed—5.0 mph (8.0 km/h) Auto mode								
141.29 (105.36)	11081 (49.29)	4.78 (7.69)	1378	2.3	0.403 (0.245)	17.35 (3.42)	0.013 (0.008)	204 (95)
50% of Pull at Reduced Engine Speed—5.1 mph (8.2 km/h) Auto mode								
95.45 (71.18)	7251 (32.25)	4.94 (7.95)	1412	1.6	0.434 (0.264)	16.12 (3.18)	0.014 (0.009)	203 (95)

Location of tests: Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln, Nebraska 68583-0832

Dates of tests: March 30 to April 8, 2021

Manufacturer: John Deere Tractor Works, 3500 East Donald St., P.O. Box 270, Waterloo Ia, 50704-0270

CONSUMABLE Fluids, OIL and TIME: Fuel No. 2 Diesel **Specific gravity converted to 60°/60°F (15°/15°C)** 0.8404 **Fuel weight** 6.998 lbs/gal (0.839 kg/l) **Diesel Exhaust Fluid (DEF)** 32% aqueous urea solution **DEF weight** 9.071 lbs/gal (1.087 kg/l) **Oil SAE 10W-30 API service classification CK-4 Transmission and hydraulic lubricant** John Deere Hy-Gard fluid **Front axle lubricant** John Deere Hy-Gard fluid **Total time engine was operated:** 18.5 hours

ENGINE: Make John Deere **Diesel Type** six cylinder vertical with turbocharger, air to air aftercooler and D.E.F (diesel exhaust fluid) exhaust treatment **Serial No.** *RG6090U094293* **Crankshaft** lengthwise **Rated engine speed** 2100 **Bore and stroke** 4.661" x 5.354" (118.4 mm x 136.0 mm) **Compression ratio** 16.0 to 1 **Displacement** 548 cu in (8984 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** two paper elements and aspirator **Oil filter** one full flow cartridge **Oil cooler** engine coolant heat exchanger for crankcase oil, radiator for hydraulic and transmission oil **Fuel filter** one paper element and water separator **Fuel cooler** radiator for pump return fuel **Exhaust** DOC (diesel oxidation catalyst), SCR (selective catalyst reduction) and regenerative DPF (diesel particulate filter) integrated within a vertical muffler **Cooling medium temperature control** thermostat and variable speed fan

ENGINE OPERATING PARAMETERS: Fuel rate: 73.2 - 79.0 lb/h (33.2 - 35.8 kg/h) **High idle:** 2190 - 2210 rpm **Turbo boost:** nominal 18.1 - 21.0 psi (125 - 145 kPa) as measured 19.8 psi (137 kPa)

CHASSIS: Type front wheel assist with duals **Serial No.** *1RW8230DLLB180250* **Tread width** rear 60.0" (1524 mm) to 127.9" (3248 mm) front 60.0" (1524 mm) to 88.0" (2235 mm) **Wheelbase** 120.1" (3050 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio with full range operator controlled power shift **Nominal travel speeds mph(km/h)** first 1.49 (2.40) second 1.73 (2.78) third 2.00 (3.22) fourth 2.32 (3.74) fifth 2.69 (4.33) sixth 3.12 (5.03) seventh 3.59 (5.77) eighth 4.16 (6.70) ninth 4.82 (7.75) tenth 5.58 (8.98) eleventh 6.47 (10.42) twelfth 7.49 (12.06) thirteenth 8.70 (14.00) fourteenth 9.99 (16.08) fifteenth 11.60 (18.67) sixteenth 13.22 (21.27)

DRAWBAR PERFORMANCE
UNBALLASTED - FRONT DRIVE ENGAGED
MANUAL MODE - 2100 ENGINE RPM

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	D.E.F. Consumption lb/hp.hr (kg/kW.h)	Temp. °F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
					5th Gear					
154.68 (115.34)	24781 (110.23)	2.34 (3.77)	2142	14.4	0.499 (0.303)	14.03 (2.76)	0.030 (0.018)	204 (95)	46 (8)	29.29 (99.17)
					6th Gear					
174.81 (130.36)	22779 (101.32)	2.88 (4.63)	2100	7.0	0.461 (0.274)	15.53 (3.06)	0.027 (0.016)	204 (95)	47 (8)	29.27 (99.12)
					7th Gear					
179.66 (133.97)	19804 (88.09)	3.41 (5.48)	2100	5.0	0.437 (0.266)	16.03 (3.16)	0.026 (0.016)	204 (96)	51 (11)	29.25 (99.05)
					8th Gear					
181.18 (135.10)	17041 (75.80)	3.99 (6.42)	2101	3.9	0.431 (0.262)	16.23 (3.20)	0.026 (0.016)	205 (96)	53 (12)	29.21 (98.92)
					9th Gear					
182.39 (136.00)	14701 (65.39)	4.65 (7.48)	2100	3.1	0.428 (0.260)	16.36 (3.22)	0.027 (0.016)	205 (96)	43 (6)	29.20 (98.88)
					10th Gear					
181.10 (135.04)	12560 (55.87)	5.41 (8.71)	2100	2.7	0.431 (0.262)	16.26 (3.20)	0.025 (0.015)	205 (96)	44 (7)	29.19 (98.85)
					11th Gear					
179.55 (133.89)	10685 (47.53)	6.30 (10.14)	2100	2.2	0.436 (0.265)	16.05 (3.16)	0.028 (0.017)	205 (96)	46 (8)	29.18 (98.81)
					12th Gear					
177.03 (132.01)	9081 (40.39)	7.31 (11.76)	2100	1.9	0.442 (0.269)	15.85 (3.12)	0.029 (0.018)	207 (97)	47 (8)	29.17 (98.78)
					13th Gear					
176.84 (131.87)	7790 (34.65)	8.51 (13.70)	2100	1.7	0.445 (0.271)	15.73 (3.10)	0.028 (0.017)	205 (96)	48 (9)	29.16 (98.75)

seventeenth 15.35 (24.70) eighteenth 17.78 (28.61) nineteenth 20.64 (33.22) twentieth 23.89 (38.44) twenty-first 26.10 (42.00) twenty-second 26.10 (42.00) twenty-third 26.10 (42.00) (electronically limited) reverse 1.79 (2.88), 2.41 (3.88), 3.24 (5.21), 4.32 (6.95), 4.99 (8.03), 6.71 (10.80), 9.02 (14.51), 12.02 (19.35), 15.91 (25.60), 18.64 (30.00), 18.64 (30.00) (electronically limited) **Clutch** wet multiple disc hydraulically actuated by foot pedal **Brakes** wet multiple disc hydraulically operated by two foot pedals that can be locked together **Steering** hydrostatic **Power take-off** 1000 rpm at 1995 engine rpm **Unladen tractor mass** 27610 lb (12524 kg)

REPAIRS AND ADJUSTMENTS: No repairs or adjustments.

NOTE 1: The manufacturer declares that the average time between active regenerations is 40 hours. A 1% power decrease was observed during the active regeneration.

NOTE 2: The John Deere 8R 230 T.E.C.U. (Tractor Electronic Control Unit) is compliant with ISOBUS 11783.

REMARKS: All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. The performance figures on this summary were taken from a test conducted under the OECD Code 2 test procedure.

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. 2230, Nebraska Summary 1182, October 19, 2021.

Roger M. Hoy
Director

P.J. Jasa
J.D. Luck
S. Pitla
Board of Tractor Test Engineers

TRACTOR SOUND LEVEL WITH CAB	Front Wheel Drive	
	Engaged dB(A)	Disengaged dB(A)
At no load in 9th gear	68.7	68.7
Transport speed - no load - 20th gear		69.6
Bystander in 20th gear		84.6

Horizontal distance of drawbar hitch point behind rear wheel axis - 48.7" (1237 mm)

TIRES AND WEIGHT

Rear Tires - No., size, ply & psi (kPa)
Front Tires - No., size, ply & psi (kPa)
Height of Drawbar
Static Weight with operator - Rear
- Front
- Total

Tested Without Ballast

Four 480/80R50;***;10(70)
Two 420/85R34;***;26(180)
20.5 in (520 mm)
16255 lb (7373 kg)
11530 lb (5230 kg)
27785 lb (12603 kg)

DRAWBAR PERFORMANCE
UNBALLASTED - FRONT DRIVE ENGAGED - AUTO MODE
(Loads based on 2100 engine rpm manual mode performance runs)

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	D.E.F. Consumption lb/hp.hr (kg/kW.h)	Temp.°F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
3.1 mph (5.0 km/h)										
173.37 (129.28)	22717 (101.05)	2.86 (4.60)	1552	6.7	0.404 (0.246)	17.33 (3.41)	0.014 (0.009)	204 (96)	50 (10)	29.26 (99.07)
3.6 mph (5.8 km/h)										
178.66 (133.22)	19787 (88.01)	3.39 (5.46)	1556	4.8	0.396 (0.241)	17.67 (3.48)	0.014 (0.009)	204 (96)	53 (11)	29.22 (98.95)
4.2 mph (6.8 km/h)										
180.53 (134.62)	16915 (75.24)	4.00 (6.44)	1573	3.9	0.396 (0.241)	17.67 (3.48)	0.013 (0.008)	205 (96)	54 (12)	29.20 (98.88)
4.8 mph (7.8 km/h)										
181.79 (135.56)	14721 (65.48)	4.63 (7.45)	1555	3.1	0.391 (0.238)	17.89 (3.52)	0.015 (0.009)	204 (96)	43 (6)	29.20 (98.87)
5.6 mph (9.0 km/hr)										
181.37 (135.25)	12687 (56.43)	5.36 (8.63)	1550	2.7	0.392 (0.239)	17.84 (3.52)	0.013 (0.008)	204 (95)	45 (7)	29.18 (98.81)
6.6 mph (10.6 km/h)										
179.53 (133.88)	10611 (47.20)	6.35 (10.21)	1574	2.3	0.394 (0.240)	17.76 (3.50)	0.015 (0.009)	205 (96)	46 (8)	29.17 (98.78)
7.6 mph (12.2 km/h)										
176.74 (131.79)	9056 (40.28)	7.32 (11.78)	1576	1.9	0.397 (0.241)	17.63 (3.47)	0.015 (0.009)	204 (96)	47 (8)	29.17 (98.78)
8.8 mph (14.2 km/h)										
176.45 (131.58)	7745 (34.45)	8.54 (13.74)	1580	1.6	0.400 (0.243)	17.51 (3.45)	0.016 (0.010)	205 (96)	48 (9)	29.16 (98.75)

**DRAWBAR PERFORMANCE
UNBALLASTED - FRONT DRIVE ENGAGED
MANUAL MODE - 1700 ENGINE RPM**

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	D.E.F Consumption lb/hp.hr (kg/kW.h)	Temp. °F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
5th Gear										
153.70 (114.61)	24674 (109.76)	2.34 (3.77)	2145	14.7	0.501 (0.305)	13.97 (2.75)	0.029 (0.018)	203 (95)	46 (8)	29.29 (99.17)
6th Gear										
178.22 (132.90)	24245 (107.85)	2.76 (4.44)	2044	9.0	0.452 (0.275)	15.47 (3.05)	0.026 (0.016)	204 (95)	49 (9)	29.26 (99.09)
7th Gear										
194.07 (144.71)	23424 (104.19)	3.11 (5.01)	1965	7.0	0.427 (0.260)	16.39 (3.23)	0.021 (0.013)	205 (96)	52 (11)	29.24 (99.00)
8th Gear										
200.70 (149.66)	21952 (97.65)	3.44 (5.53)	1850	5.9	0.409 (0.249)	17.11 (3.37)	0.019 (0.011)	206 (96)	54 (12)	29.19 (98.85)
9th Gear										
204.32 (152.36)	20749 (92.30)	3.70 (5.95)	1702	5.4	0.397 (0.241)	17.63 (3.47)	0.016 (0.010)	205 (96)	55 (13)	29.18 (98.81)
10th Gear										
204.11 (152.20)	17707 (78.76)	4.32 (6.95)	1700	4.2	0.396 (0.241)	17.69 (3.48)	0.016 (0.010)	206 (96)	55 (13)	29.17 (98.78)
11th Gear										
204.37 (152.39)	15212 (67.66)	5.04 (8.11)	1700	3.5	0.395 (0.240)	17.72 (3.49)	0.016 (0.010)	206 (96)	55 (13)	29.17 (98.78)
12th Gear										
205.11 (152.95)	13105 (58.29)	5.87 (9.45)	1700	2.9	0.393 (0.239)	17.81 (3.51)	0.018 (0.011)	206 (96)	48 (9)	29.17 (98.76)
13th Gear										
205.21 (153.03)	11239 (49.99)	6.85 (11.02)	1700	2.4	0.392 (0.238)	17.85 (3.52)	0.018 (0.011)	206 (96)	48 (9)	29.16 (98.75)
14th Gear										
203.04 (151.41)	9656 (42.95)	7.89 (12.69)	1700	2.1	0.397 (0.242)	17.61 (3.47)	0.019 (0.012)	205 (96)	48 (9)	29.16 (98.75)
15th Gear										
201.05 (149.92)	8209 (36.52)	9.19 (14.78)	1701	1.8	0.401 (0.244)	17.46 (3.44)	0.020 (0.012)	205 (96)	48 (9)	29.16 (98.75)

HYDRAULIC PERFORMANCE


CATEGORY: IVN
Quick Attach: Yes
OECD Static test

	<u>Lift cylinders</u>	
Maximum force exerted through whole range:	15229 lbs (67.7 kN) 2x100 mm	18869 lbs (83.9 kN) 1x100 mm & 1x115 mm
	20254 lbs (90.1 kN) 2x115 mm	
<hr/>		
	<u>85 cc pump</u>	<u>85 cc and 35cc pumps combined</u>
i) Sustained pressure at compensator cutoff:	2870 psi (198 bar)	2915 psi (201 bar)
three outlet sets combined		
ii) Pump delivery rate at minimum pressure and rated engine speed:	60.9 GPM (230.5 l/min)	86.0 GPM (325.4 l/min)
iii) Pump delivery rate at maximum		
hydraulic power:	60.9 GPM (230.5 l/min)	80.5 GPM (304.8 l/min)
Delivery pressure:	2400 psi (165 bar)	2239 psi (154 bar)
Power:	85.3 HP (63.6 kW)	105.2 HP (78.5 kW)
<hr/>		
	single outlet set	
ii) Pump delivery rate at minimum pressure and rated engine speed:	<u>1/2" couplers</u>	<u>3/4" couplers</u>
iii) Pump delivery rate at maximum		
hydraulic power:	35.8 GPM (135.7 l/min)	41.9 GPM (158.5 l/min)
Delivery pressure:	2314 psi (160 bar)	2309 psi (159 bar)
Power:	48.4 HP (36.1 kW)	56.4 HP (42.1 kW)

HITCH DIMENSIONS AS TESTED—NO LOAD

	inch	mm
A	28.5	725
B	20.5	520
C	20.9	532
D	18.9	480
E	12.0	304
F	14.4	365
G	38.2	970
H	9.1	230
I	23.6	599
J	23.8	605
K	28.7	730
L	52.8	1340
*L'	58.7	1490
M	25.9	657
N	40.1	1019
O	9.1	230
P	50.1	1272
Q	41.5	1055
R	45.7	1160

*L' to Quick Attach ends

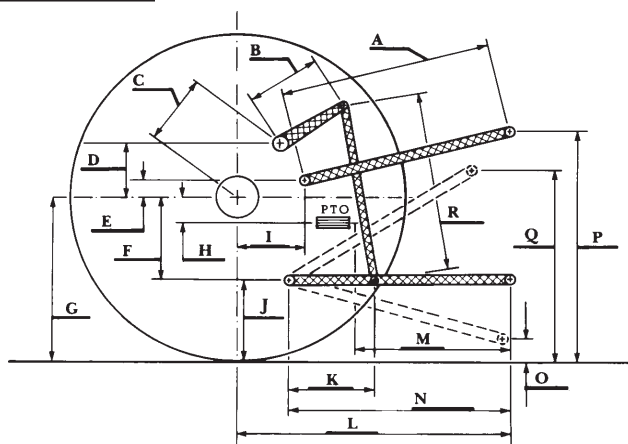

RECOMMENDED CITATION FORMAT:

NTTL.(2021). Nebraska OECD tractor test 2230 for John Deere 8R 230 e23 Diesel. Lincoln, NE:Nebraska Tractor Test Laboratory. Retrieved from <http://tractortestlab.unl.edu>



JOHN DEERE 8R 230 DIESEL

Institute of Agriculture and Natural Resources
University of Nebraska–Lincoln