

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F.
Larsen

January 1983

Test 1503: Ford 1710 (12x4) Synchro Diesel 12-Speed

Tractor Museum

University of Nebraska-Lincoln, TractorMuseumArchives@unl.edu

Follow this and additional works at: <http://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Applied Mechanics Commons](#)

Museum, Tractor, "Test 1503: Ford 1710 (12x4) Synchro Diesel 12-Speed" (1983). *Nebraska Tractor Tests*. 1814.
<http://digitalcommons.unl.edu/tractormuseumlit/1814>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

NEBRASKA TRACTOR TEST 1503—FORD 1710 (12X4) SYNCHRO DIESEL 12 SPEED

POWER TAKE-OFF PERFORMANCE

Power Hp (kW)	Crank shaft speed rpm	Fuel Consumption			Temperature °F (°C)			Barometer inch Hg (kPa)	
		gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Cooling medium	Air wet bulb	Air dry bulb		
MAXIMUM POWER AND FUEL CONSUMPTION									
Rated Engine Speed—Two Hours (PTO Speed—592 rpm)									
23.79 (17.74)	2701	1.882 (7.124)	0.553 (0.337)	12.64 (2.490)	215 (101.4)	67 (19.6)	75 (24.1)	29.065 (98.148)	
Standard Power Take-off Speed (540 rpm)—One Hour									
22.34 (16.66)	2466	1.695 (6.416)	0.531 (0.323)	13.18 (2.597)	210 (98.9)	67 (19.4)	75 (23.9)	29.090 (98.233)	
VARYING POWER AND FUEL CONSUMPTION—Two Hours									
20.76 (15.48)	2777	1.664 (6.299)	0.561 (0.341)	12.48 (2.458)	203 (95.0)	67 (19.4)	74 (23.6)	
0.00 (0.00)	2873	0.682 (2.582)	168 (75.3)	67 (19.4)	74 (23.6)	
10.59 (7.90)	2832	1.140 (4.315)	0.753 (0.458)	9.29 (1.831)	177 (80.6)	67 (19.4)	74 (23.6)	
23.90 (17.82)	2700	1.912 (7.238)	0.560 (0.341)	12.50 (2.462)	209 (98.3)	66 (19.2)	74 (23.6)	
5.32 (3.97)	2850	0.905 (3.426)	1.189 (0.724)	5.88 (1.159)	173 (78.3)	67 (19.4)	75 (23.9)	
15.73 (11.73)	2802	1.385 (5.243)	0.616 (0.375)	11.36 (2.237)	188 (86.4)	67 (19.4)	75 (23.9)	
Av Au	12.72 (9.49)	2806	1.281 (4.849)	0.705 (0.429)	9.92 (1.957)	186 (85.7)	67 (19.4)	75 (23.7)	29.110 (98.300)

DRAWBAR PERFORMANCE

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption			Temp. °F (°C)			Barom. inch Hg (kPa)
					gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Cool- ing med	Air wet bulb	Air dry bulb	
Maximum Available Power—Two Hours 9th (3-3) Gear											
20.48 (15.27)	1351 (6.01)	5.69 (9.15)	2700	6.20	1.855 (7.022)	0.634 (0.386)	11.04 (2.174)	195 (90.6)	52 (10.8)	62 (16.7)	29.045 (98.081)
75% of Pull at Maximum Power—Ten Hours 9th (3-3) Gear											
16.64 (12.41)	1052 (4.68)	5.93 (9.54)	2775	4.84	1.575 (5.962)	0.662 (0.403)	10.56 (2.081)	175 (79.3)	42 (5.4)	47 (8.5)	29.038 (98.057)
50% of Pull at Maximum Power—Two Hours 9th (3-3) Gear											
11.37 (8.48)	701 (3.12)	6.08 (9.79)	2803	3.37	1.291 (4.888)	0.794 (0.483)	8.81 (1.735)	176 (80.0)	52 (11.1)	65 (18.1)	29.080 (98.199)
50% of Pull at Reduced Engine Speed—Two Hours 11th (4-2) Gear											
11.38 (8.49)	702 (3.12)	6.08 (9.79)	1799	3.22	0.985 (3.730)	0.606 (0.368)	11.55 (2.275)	177 (80.3)	51 (10.3)	63 (16.9)	29.135 (98.385)
MAXIMUM POWER IN SELECTED GEARS											
17.21 (12.84)	2680 (11.92)	2.41 (3.88)	2769	14.93	6th (2-3) Gear			177 (80.6)	52 (11.1)	55 (12.8)	28.900 (97.591)
19.71 (14.69)	2326 (10.34)	3.18 (5.11)	2699	11.50	7th (3-1) Gear			185 (84.7)	52 (11.1)	55 (12.8)	28.930 (97.692)
20.57 (15.34)	1803 (8.02)	4.28 (6.89)	2700	8.37	8th (3-2) Gear			183 (83.9)	52 (11.1)	56 (13.3)	28.960 (97.794)
21.23 (15.83)	1402 (6.23)	5.68 (9.14)	2700	6.32	9th (3-3) Gear			189 (87.2)	51 (10.6)	58 (14.4)	28.990 (97.895)
21.08 (15.72)	1149 (5.11)	6.88 (11.08)	2700	5.14	10th (4-1) Gear			182 (83.3)	52 (11.1)	56 (13.3)	28.970 (97.827)
20.60 (15.36)	851 (3.79)	9.08 (14.61)	2701	3.89	11th (4-2) Gear			182 (83.3)	51 (10.6)	57 (13.9)	28.980 (97.861)

Department of Agricultural Engineering

Dates of Test: October 17-31, 1983

Manufacturer: ISHIKAWAJIMA-SHIBAURA
MACHINERY COMPANY LTD. Tokyo, Japan

FUEL, OIL AND TIME: Fuel No. 2 Diesel
Cetane No. 47.0 (rating taken from oil company's
inspection data) **Specific gravity converted to 60°/**
60° (15°/15°) 0.8404 Fuel weight 6.997 lbs/gal
(0.839 kg/l) Oil SAE 15W-40 API service classi-
fication SE-SF, CC-CD To motor 1.065 gal
(4.030 l) Drained from motor 0.877 gal (3.322 l)
Transmission and final drive lubricant Ford
M2C-134-B fluid Total time engine was operated
35.5 hours.

ENGINE: Make Shibaura Diesel **Type** three
cylinder vertical **Serial No.** *H843-19358*
Crankshaft lengthwise **Rated rpm** 2700 **Bore**
and stroke 3.31" × 3.31" (84 mm × 84 mm) **Com-**
pression ratio 23 to 1 **Displacement** 85.2 cu in
(1396 ml) Starting system 12 volt **Lubrication**
pressure **Air cleaner** one paper element **Oil fil-**
ter one full flow cartridge **Fuel filter** one paper
element **Muffler** vertical **Cooling medium**
temperature control one thermostat.

CHASSIS: **Type** standard **Serial No.**
*1710*UL00919* **Tread width** rear 43.3" (1100
mm) to 58.7" (1490 mm) front 43.5" (1105 mm) to
57.5" (1460 mm) **Wheel base** 63" (1600 mm) **Center**
of gravity (without operator or ballast, with
minimum tread, with fuel tank filled and tractor
serviced for operation) Horizontal distance for-
ward from center-line of rear wheels 23.8" (605
mm) Vertical distance above roadway 30.7" (780
mm) Horizontal distance from center of rear wheel
tread 0" (0 mm) to the right/left **Hydraulic control**
system direct engine drive **Transmission** selec-
tive gear fixed ratio **Advertised speeds mph (km/**
h) first 0.7 (1.2) second 1.0 (1.5) third 1.3 (2.0)
fourth 1.6 (2.6) fifth 2.2 (3.5) sixth 2.8 (4.5)
seventh 3.7 (5.9) eighth 4.8 (7.7) ninth 6.2 (10.0)
tenth 7.4 (11.9) eleventh 9.6 (15.5) twelfth 12.5
(20.1) reverse 1.0 (1.6), 2.2 (3.5), 5.1 (8.2), 10.3
(16.6) **Clutch** single dry disc operated by foot
pedal **Brakes** drum and shoe operated by two
foot pedals which can be locked together **Steering**
mechanical **Turning radius** (on concrete surface
with brake applied) right 92.5" (2.35 m) left 92.5"
(2.35 m) (on concrete surface without brake) right
100.4" (2.55 m) left 100.4" (2.55 m) **Turning space**
diameter (on concrete surface with brake applied)
right 193" (4.90 m) left 193" (4.90 m) (on concrete
surface without brake) right 209" (5.30 m) left 209"
(5.30 m) **Power take-off** 540 rpm at 2466 engine
rpm.

REPAIRS and ADJUSTMENTS: No repairs or
adjustments.

LUGGING ABILITY IN 9th (3-3) GEAR

Crankshaft Speed rpm	2700	2432	2157	1887	1614	1344
Pull—lbs (kN)	1402 (6.23)	1425 (6.34)	1455 (6.47)	1533 (6.91)	1660 (7.38)	1651 (7.34)
Increase in Pull %	0	2	4	11	18	18
Power—Hp (kW)	21.23 (15.83)	19.42 (14.48)	17.55 (13.09)	16.31 (12.17)	14.84 (11.07)	12.30 (9.17)
Speed—Mph (km/h)	5.68 (9.14)	5.11 (8.23)	4.52 (7.28)	3.94 (6.34)	3.35 (5.40)	2.79 (4.49)
Slip %	6.32	6.32	6.60	7.06	7.51	7.42

TRACTOR SOUND LEVEL WITHOUT CAB	dB(A)
Maximum Available Power—Two Hours	91.0
75% of Pull at Maximum Power—Ten Hours	91.0
50% of Pull at Maximum Power—Two Hours	90.0
50% of Pull at Reduced Engine Speed—Two Hours	86.5
Bystander in 12th (4-3) gear	80.0


TIRES, BALLAST AND WEIGHT		With Ballast	Without Ballast
Rear Tires	—No., size, ply & psi (kPa)	Two 11.2-24; 6; 14 (95)	Two 11.2-24; 6; 14 (95)
Ballast	—Liquid (each)	255 lb (116 kg)	None
	—Cast Iron (each)	215 lb (97 kg)	None
Front Tires	—No., size, ply & psi (kPa)	Two 5.00-15; 4; 32 (220)	Two 5.00-15; 4; 32 (220)
Ballast	—Liquid (each)	None	None
	—Cast Iron (each)	60 lb (27 kg)	None
Height of Drawbar		13.5 in (345 mm)	13.5 in (345 mm)
Static Weight with Operator	—Rear	2510 lb (1138 kg)	1570 lb (712 kg)
	—Front	1020 lb (463 kg)	900 lb (408 kg)
	—Total	3530 lb (1601 kg)	2470 lb (1120 kg)

REMARKS: All test results were determined from observed data obtained in accordance with SAE and ASAE test codes or official Nebraska test procedure. For the maximum power tests, the fuel temperature at the injection pump was maintained at 150°F (65.7°C). Six gears were chosen between 15% slip and 10 mph (16.1 km/h).

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. 1503.

LOUIS I. LEVITICUS
Engineer-in-Charge

K. VON BARGEN
W. E. SPLINTER
L. L. BASHFORD
Board of Tractor Test Engineers

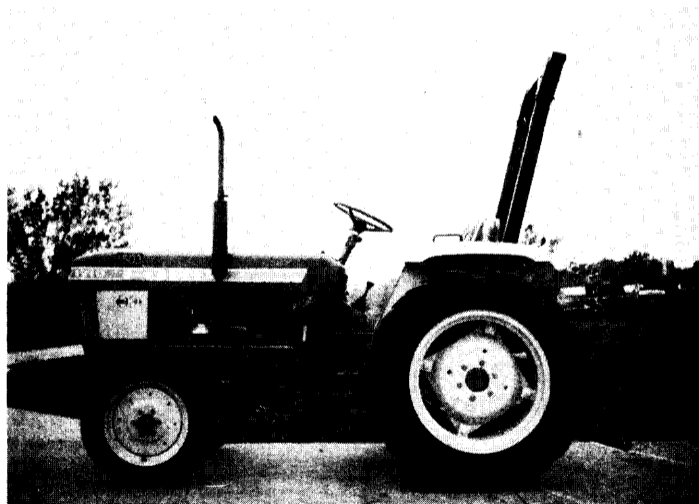

Ford 1710 (12x4) Synchro Diesel